

Specifications

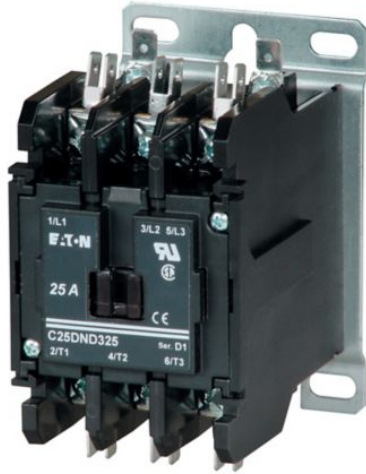


Photo is representative

Eaton C25DND215A

Eaton definite purpose contactor, Quick, 15A, 110-120 Vac, 50/60 Hz, Open with metal mounting plate, 15-50A, two- and three-pole, 15A, Contactor, Two-pole, 20A, Screw/pressure plate and quick connect terminals (side-by-side), Non-reversing

General specifications

PRODUCT NAME	Eaton definite purpose contactor
CATALOG NUMBER	C25DND215A
UPC	782116307647
PRODUCT LENGTH/DEPTH	3.35 in
PRODUCT HEIGHT	3.75 in
PRODUCT WIDTH	2.4 in
PRODUCT WEIGHT	1.19 lb
WARRANTY	1 year
COMPLIANCES	RoHS Compliant
CERTIFICATIONS	CSA Certified UL Recognized

Product specifications

AMPERAGE RATING	15A
NUMBER OF POLES	Two-pole
TYPE	Non-reversing
COIL	110-120 Vac
COIL VOLTAGE	50/60 Hz
ENCLOSURE	Open with metal mounting plate
FRAME SIZE	15-50 A, two-pole and three-pole
INDUCTIVE FULL LOAD	15 A
MODEL	Contactator
RESISTIVE LOAD	20 A
TERMINALS	Screw/pressure plate and quick connect terminals (side-by-side)
CONNECTION	Quick

Resources

CATALOGS

[Motor Control and Protection, Definite Purpose Contactors and Starters, Volume 5, Tab 4](#)

SPECIFICATIONS AND DATASHEETS

[Eaton Specification Sheet - C25DND215A](#)

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE:



Eaton Corporation plc

Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

