

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

Individual Spec Sheet

TRADITIONAL RECESSED

ORDERING INFORMATION

Order code: 64359
Model number: RF4in/REM0D/IC/LED/E26/ELUME
UPC: 069549643598
Case quantity: 6


PHYSICAL DATA

Type: Remodeler - IC Airtight
Housing material: Aluminum
Size in. (mm): 4 1/4" (108)
Cutting hole diameter in. (mm): 4 1/2" (114)

PERFORMANCE DATA

Sockets: E26
Volts (V): 120
Thermal protection: Yes
Junction box: Yes
Wire to wire connectors: Yes

DIMENSIONS

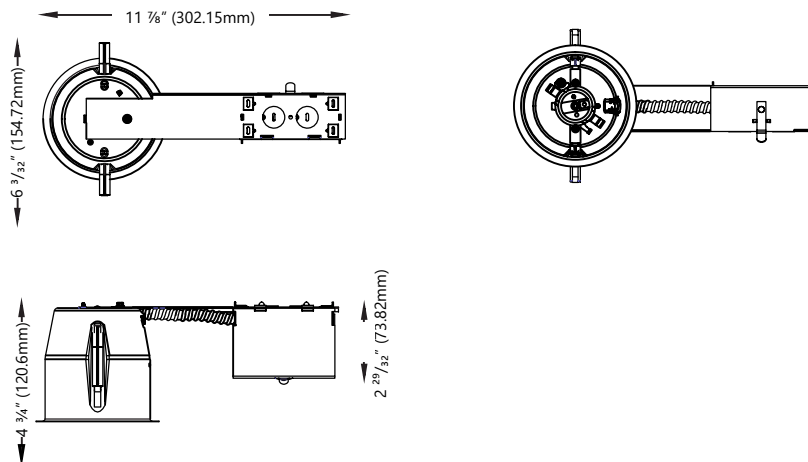

1^{yr}
warranty

airtight

6
damp location

9w
maximum per lamp

Max. of 4 no. 12 AWG through branch circuit conductor suitable for 90°C permitted in box.

Only valid with LED lamps.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

¹ For complete warranty information please visit www.standardpro.com

COMPATIBLE LAMPS AND TRIMS

Compatible lamps	Max Wattage (W)	Compatible E-Lume trims
LED/DEL PAR20	9	64372, 64373, 64374, 64376, 64377, 64378, 64379, 64381, 64383, 64384, 64387, 64389
LED/DEL PAR16	7	64370, 64371, 64375, 64380, 64382, 64385, 64386, 64388
LED/DEL MR16 (E26)	7	64370, 64371, 64375, 64380, 64382, 64385, 64386, 64388

INSTALLATION

- Screw-in mounting system
- Permits the installation in ceilings up to 1 ¼ in. in thickness
- Suitable for double drywall application
- Wire to wire connectors



CAUTIONS

- Turn power off before inspection, installation, or removal
- Risk of electric shock – do not use where directly exposed to water or weather
- Risk of fire. Blinking light of this thermally protected fixture may indicate overheating
- Minimum 90 °C supply conductor
- May be interconnected using the same circuit
- Use with ELUME trims only

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.