


## J1772 TO NACS ADAPTER

### Usage & Care Instructions



## WARNINGS


Read this manual before using the adapter.

- Failure to follow the instructions can result in fire, electrical shock or serious injury.
- Do not attempt to open, disassemble, repair, tamper with or modify the adapter.
- Ensure output is 80A or less.
- Not for current interrupting.

## SAFETY INFORMATION

- When connecting to the charging station, make sure the output is 80A or less.
- Before use, ensure the output port of the J1772 charging cable is tightly connected to the Adapter.


## INTRODUCTION TO PARTS

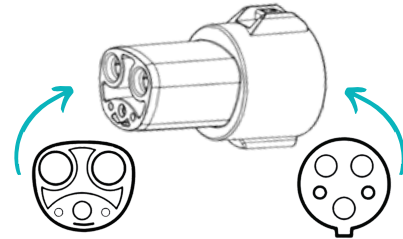

NACS Plug


SAE J1772

## HOW TO USE

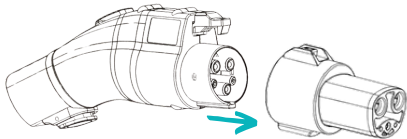


**STEP 1:** Connect the J1772 charging cable to the Adapter.

**OPTIONAL :** Insert the lock ring over the Adapter with the cover facing you until it snaps into place\*. Proceed with Step 2.

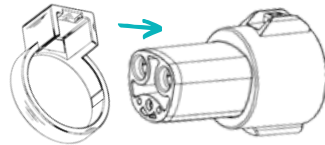

\*The ring includes two inserts to support various vehicle models. Choose the insert that best fits your locking mechanism.

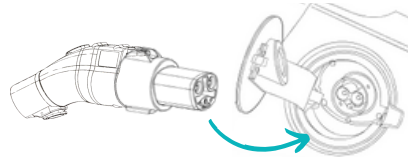

**STEP 2:** Firmly plug the Adapter into your NACS Electric Vehicle.

**STEP 3:** When charging is complete, release the Adapter from the vehicle.

## SPECIFICATIONS

Voltage .....	Max. 240V AC
Current .....	Max 80A
Operating Temperature .....	-22°F - 122°F (-30°C - 50°C)



## APPLICABLE CHARGING STATIONS:

All J1772 North American Level 2  
Charging Stations