

NACS TO CCS1 ADAPTER

Usage & Care Instructions



WARNINGS


Read this manual before using the Adapter.

- Failure to follow the instructions can result in fire, electrical shock or serious injury.
- Do not attempt to open, disassemble, repair, tamper with or modify the Adapter.

SAFETY INFORMATION

- Temporary kill switch. When Adapter reaches 90°C, charging stops.
- Plug life: > 10,000 sessions
- Specifically designed for electric vehicles in the United States.
- Protection Level: IP54
 - Protection from dust, dirt, oil, and other non-corrosive substances. Prevent contact with enclosed equipment.

INTRODUCTION TO PARTS

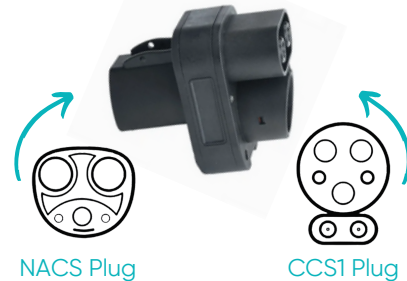

HOW TO USE



HOW TO USE

STEP 1: Connect the Tesla charging cable to the Adapter.

STEP 2: Firmly plug the Adapter into your CCS1 Electric Vehicle.

STEP 3: When charging is complete, release the Adapter from the vehicle.

SPECIFICATIONS

Power	Up to 200kW
Voltage	Up to 1000V DC
Current	Max 200A
Protection Level	IP54
Operating Temperature	-22°F - 122°F (-30°C - 50°C)



APPLICABLE CHARGING STATIONS:

All Tesla V3 Superchargers in North America.

Ensure vehicle compatibility. Known models to be compatible with this adapter include:

- Ford
- General Motors
- Rivian
- Lucid

