


NACS TO J1772 ADAPTER

Usage & Care Instructions



goelectricave.com



WARNINGS


Read this manual before using the Adapter.

- **DO NOT use with Tesla Superchargers.**
- Failure to follow the instructions can result in fire, electrical shock or serious injury.
- Do not attempt to open, disassemble, repair, tamper with or modify the adapter.
- Ensure output is less than 60A.

SAFETY INFORMATION

- When connecting to Tesla Destination Chargers, make sure the output is less than 48A.
- When connecting the Adapter to the Tesla Charger, always wait 30s before connecting the other end to your J1772 EV.
- Before use, ensure the output port of the Tesla charging cable is tightly connected to the Adapter.


INTRODUCTION TO PARTS

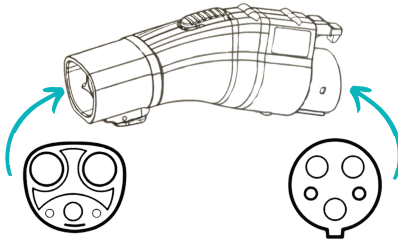


NACS Plug

SAE J1772


LOCKING MECHANISMS

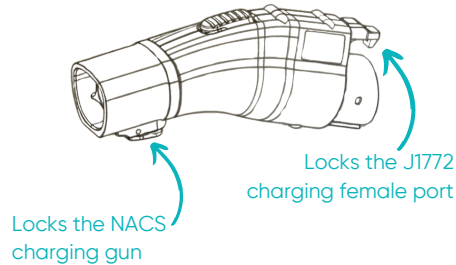

HOW TO USE

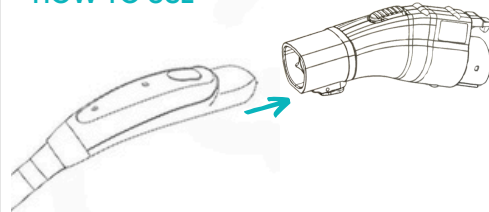

STEP 1: Connect the Tesla charging cable to the Adapter. Wait at least 30 seconds before connecting it to your J1772 electric vehicle.



STEP 2: Firmly plug the Adapter into your J1772 Electric Vehicle.

STEP 3: When charging is complete, press the lever on the top of the Adapter to release the Adapter from the vehicle.

SPECIFICATIONS



Voltage	Max. 250V AC
Current	Max 60A
Protection Level	IP65
Operating Temperature	-22°F - 122°F (-30°C - 50°C)

APPLICABLE CHARGING STATIONS:

Tesla Wall Connector

Tesla Mobile Connector

NOT for use with Tesla Superchargers