


COMPACT HIGH PRESSURE LP GAS FIRST STAGE REGULATORS

GAS-FLO Compact First-Stage regulators are designed for use as the first regulator of a Two-Stage regulation system. Its' compact design makes it the ideal choice for tank collar installations. This large capacity adjustable First-Stage regulator is factory set at 10 PSIG. Equipped with integral relief valve and built-in 1/8" FNPT gauge taps.

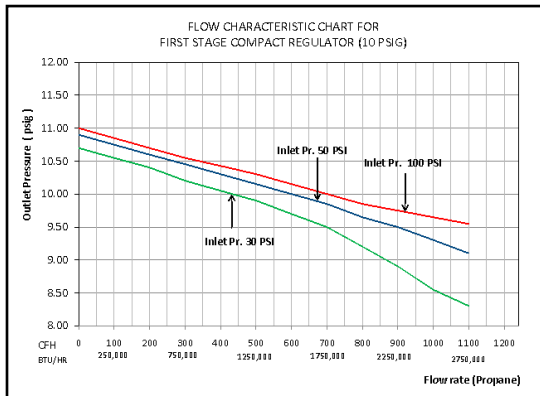

| PART No. | Capacity * (BTU/Hr)Inlet Propane | Inlet Connection | Outlet Connection | Set Delivery Pressure | Outlet Adjustment Range | Bonnet Vent |
|--|--|---------------------|----------------------|-----------------------------|-------------------------------|----------------|
| GR-9148C | 2,400,000 | 1/4 FPT | 1/2 FPT | 10 PSI | 8 - 12 PSI | Over Outlet |
| GR-9148C-TB | | 1/4 FPT (2) | 1/2 FPT | 10 PSI | 8 - 12 PSI | |
| GR-918C | | F.POL | 1/2 FPT | 10 PSI | 8 - 12 PSI | |
| GR-918C-TPOL | | F.POL (2) | 1/2 FPT | 10 PSI | 8 - 12 PSI | |
| GR-9112C | | F.POL | 3/4 FPT | 10 PSI | 8 - 12 PSI | |
| GR-9116C | | F.POL | 1 FPT | 10 PSI | 8 - 12 PSI | |
| GR-9188C | | 1/2 FPT | 1/2 FPT | 10 PSI | 8 - 12 PSI | |
| GR-91812C | | 1/2 FPT | 3/4 FPT | 10 PSI | 8 - 12 PSI | |
| GR-91816C | | 1/2 FPT | 1 FPT | 10 PSI | 8 - 12 PSI | |
| GR-91128C | | 3/4 FPT | 1/2 FPT | 10 PSI | 8 - 12 PSI | |
| GR-911212C | | 3/4 FPT | 3/4 FPT | 10 PSI | 8 - 12 PSI | |
| GR-911216C | | 3/4 FPT | 1 FPT | 10 PSI | 8 - 12 PSI | |
| GR-905C Compact Regulator Mounting Bracket (Screws included) | | | | | | |

* Flow Capacity based on Inlet Pressure 20 psi higher than the Regulator setting and delivery Pressure 20% lower than the setting.




GR-905C



COMPACT LOW PRESSURE LP GAS SECOND STAGE REGULATORS

GAS-FLO® Compact Second Stage regulators are designed to reduce the pressure from a First-Stage regulator. Its' compact design makes it the ideal choice for limited space domestic applications. These adjustable regulators are factory set at 11" w.c. with first stage inlet pressure of 10 psig. Equipped with integral relief valve and built-in 1/8" FNPT gauge taps.

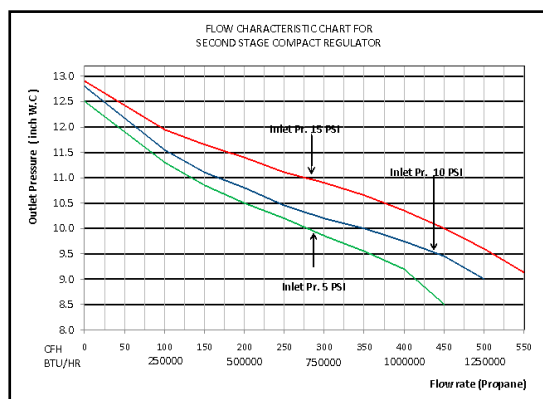


| PART No. | Capacity * (BTU/Hr)Inlet Propane | Inlet Connection | Outlet Connection | Set Delivery Pressure | Outlet Adjustment Range | Bonnet Vent |
|--|--|---------------------|----------------------|-----------------------------|-------------------------------|----------------|
| GR-9288C | 1,200,000 | 1/2 FPT | 1/2 FPT | 11" wc | 9 - 13" wc | Over Outlet |
| GR-9288CBM | | 1/2 FPT | 1/2 FPT BM | 11" wc | 9 - 13" wc | |
| GR-9288C-DU | | 1/2 FPT DU | 1/2 FPT | 11" wc | 9 - 13" wc | |
| GR-9288CBM-DU | | 1/2 FPT DU | 1/2 FPT BM | 11" wc | 9 - 13" wc | |
| GR-92812C | | 1/2 FPT | 3/4 FPT | 11" wc | 9 - 13" wc | |
| GR-92812CBM | | 1/2 FPT | 3/4 FPT BM | 11" wc | 9 - 13" wc | |
| GR-92812C-DU | | 1/2 FPT DU | 3/4 FPT | 11" wc | 9 - 13" wc | |
| GR-92812CBM-DU | | 1/2 FPT DU | 3/4 FPT BM | 11" wc | 9 - 13" wc | |
| GR-92816C | | 1/2 FPT | 1 FPT | 11" wc | 9 - 13" wc | |
| GR-92128C | | 3/4 FPT | 1/2 FPT | 11" wc | 9 - 13" wc | |
| GR-921212C | | 3/4 FPT | 3/4 FPT | 11" wc | 9 - 13" wc | |
| GR-921212CBM | | 3/4 FPT | 3/4 FPT | 11" wc | 9 - 13" wc | |
| GR-921216C | | 3/4 FPT | 1 FPT | 11" wc | 9 - 13" wc | |
| GR-905C Compact Regulator Mounting Bracket (Screws included) | | | | | | |

* Flow Capacity based on 10 psi Inlet Pressure and 11" wc delivery Pressure



GR-905C

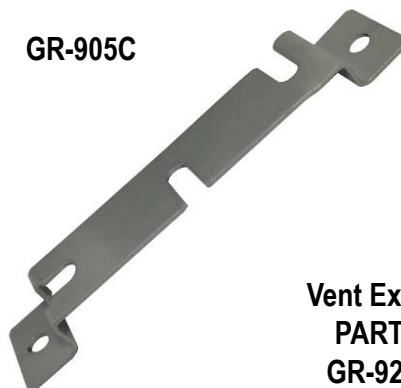


*** Suffix second stage compact regulator part number:
 BM - Back Mount
 DU - Dielectric Union
 BM-DU - Back Mount with Dielectric Union

Vent Extender
 PART No.
 GR-920-VE



COMPACT SECOND STAGE LOW PRESSURE 2 PSI REGULATORS

GAS-FLO Low Pressure GR-93 Series Second Stage regulators are designed to reduce the pressure from a First-Stage regulator down to 2 PSIG.

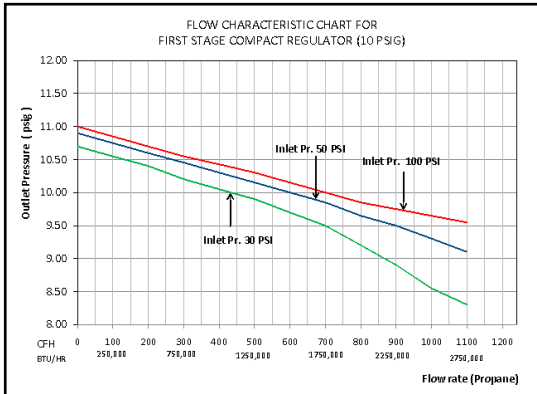

*** Suffix second stage compact regulator part number:
 BM - Back Mount
 DU - Dielectric Union
 BM-DU - Back Mount with Dielectric Union



Back mount





| PART No. | Capacity * (BTU/Hr)Inlet Propane | Inlet Connection | Outlet Connection | Set Delivery Pressure | Outlet Adjustment Range | Bonnet Vent |
|--|--|---------------------|----------------------|-----------------------------|-------------------------------|----------------|
| GR-9388C | 1,350,000 | 1/2 FPT | 1/2 FPT | 2 PSI | 1 - 2.2 PSI | Over Inlet |
| GR-9388CBM | | 1/2 FPT | 1/2 FPT BM | 2 PSI | 1 - 2.2 PSI | |
| GR-9388C-DU | | 1/2 FPT DU | 1/2 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-9388CBM-DU | | 1/2 FPT DU | 1/2 FPT BM | 2 PSI | 1 - 2.2 PSI | |
| GR-93812C | | 1/2 FPT | 3/4 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-93812CBM | | 1/2 FPT | 3/4 FPT BM | 2 PSI | 1 - 2.2 PSI | |
| GR-93812C-DU | | 1/2 FPT DU | 3/4 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-93812CBM-DU | | 1/2 FPT DU | 3/4 FPT BM | 2 PSI | 1 - 2.2 PSI | |
| GR-93816C | | 1/2 FPT | 1 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-93128C | | 3/4 FPT | 1/2 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-931212C | | 3/4 FPT | 3/4 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-931216C | | 3/4 FPT | 1 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-93688C | | 1/2 FPT | 1/2 FPT | 2 PSI | 1 - 2.2 PSI | Over Outlet |
| GR-936812C | | 1/2 FPT | 3/4 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-9361212C | | 3/4 FPT | 3/4 FPT | 2 PSI | 1 - 2.2 PSI | |
| GR-905C Compact Regulator Mounting Bracket (Screws included) | | | | | | |

* Flow Capacity based on Inlet Pressure 20 psi higher than the Regulator setting and delivery Pressure 20% lower than the setting.

COMPACT 2 PSI TWO STAGE REGULATORS

GAS-FLO Compact Two Stage regulators combine first and second stage regulators into a single unit. Designed to reduce container pressure down to 2 PSI. delivery pressure. Its' compact design makes it the ideal choice for small domestic applications.

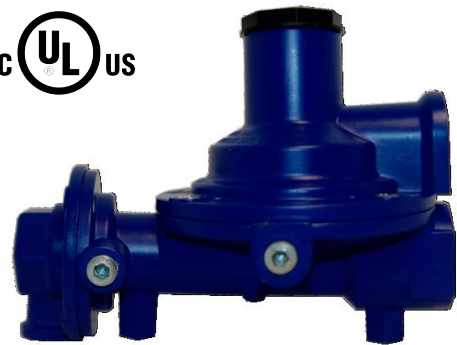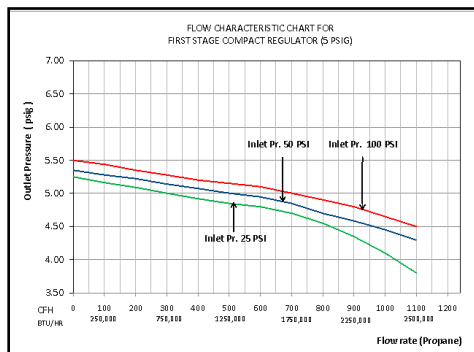

| PART No. | Capacity * (BTU/Hr) Inlet Propane | Inlet Connection | Outlet Connection | Set Delivery Pressure | Outlet Adjustment Range | Bonnet Vent |
|-----------|--------------------------------------|------------------|-------------------|-----------------------|-------------------------|-------------|
| GR-96248C | 1,000,000 | 1/4 FPT | 1/2 FPT | 2 PSI | 1 - 2.2 PSI | Over Outlet |
| GR-94248C | 1,000,000 | 1/4 FPT | 1/2 FPT | 2 PSI | 1 - 2.2 PSI | 9 O'Clock |

COMPACT LP GAS TWO STAGE REGULATORS

This **GAS-FLO** Compact regulator combines first and second stage regulators into a single unit. Designed to reduce container pressure down to 11" w.c. delivery pressure. Its' compact design makes it the ideal choice for domestic applications. Equipped with 1/8" FNPT gauge taps on inlet and outlet for easy system pressure checks.



GR-948C-2412



GR-968C

| PART No. | Capacity * (BTU/Hr) Inlet Propane | Inlet Connection | Outlet Connection | Set Delivery Pressure | Outlet Adjustment Range | Bonnet Vent |
|--------------|---|---------------------|----------------------|-----------------------------|-------------------------------|----------------|
| GR-968C | | 1/4 FPT | 1/2 FPT | 11" wc | 9 - 13" wc | Over Outlet |
| GR-968C-2412 | GR-968C Regulator Kit c/w/ 12 Inch POL x 1/4 MPT Copper Pigtail | | | | | |
| GR-9612C | 1,000,000 | 1/4 FPT | 3/4 FPT | 11" wc | 9 - 13" wc | Over Outlet |
| GR-9616C | | 1/4 FPT | 1 FPT | 11" wc | 9 - 13" wc | Over Outlet |
| GR-948C | | 1/4 FPT | 1/2 FPT | 11" wc | 9 - 13" wc | 9 O'Clock |
| GR-948C-2412 | GR-948C Regulator Kit c/w/ 12 Inch POL x 1/4 MPT Copper Pigtail | | | | | |
| GR-9412C | | 1/4 FPT | 3/4 FPT | 11" wc | 9 - 13" wc | 9 O'Clock |
| GR-9416C | | 1/4 FPT | 1 FPT | 11" wc | 9 - 13" wc | 9 O'Clock |
| GR-905C | Compact Regulator Mounting Bracket (Screws included) | | | | | |

* Flow Capacity based on 10 psi Inlet Pressure and 11" wc delivery Pressure



GR-905C

