

GROHE
RAPID SL

WALL CARRIERS AND
ACTUATION PLATES





RAPID SL FLUSHING SYSTEM

GROHE Rapid SL is a concealed flushing system, installed within or in front of dry studded walls, for application with two prong wall hung toilets. Just choose a toilet bowl according to your personal taste and bring the design and comfort of your bathroom to a new level.


GROHE RAPID SL KEY FEATURES

Save Water With GROHE EcoCare



Benefit from dual flush technology and use up to 50% less water. Pressing the large button will release all 1.6 gallons (6L) of water. Pressing the Eco button, flushes with a reduced 0.8 gallons (3L) volume.

With an effective flush of 1.1 gallons (4L), Rapid SL meets strict performance and building code standards as a CalGreen compliant product.

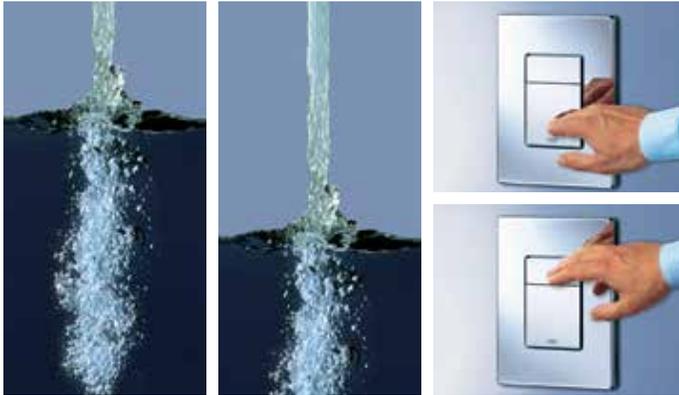

Press the large button to flush the entire contents of the cistern


Press the small button to flush the reduced water

Robust & Reliable



With GROHE Safety Rapid SL provides the utmost level of security. A certified load bearing capacity and stability of the carrier has been confirmed at 880 lbs. (400 kg).


Compatibility

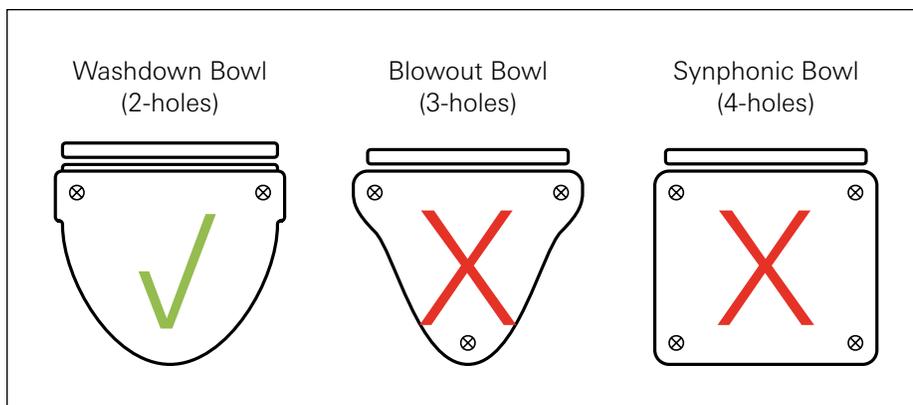

GROHE Rapid SL is compatible with any two-hole wall-hung toilet bowl offered by any major ceramic manufacturer for the utmost design freedom.

Maximum Noise Control For Quietest Operation

Since the Rapid SL is a concealed system, noise is considerably decreased in comparison to a traditional toilet. In addition, GROHE Whisper® technology provides low-noise fittings and the pneumatic actuator further reduces noise.

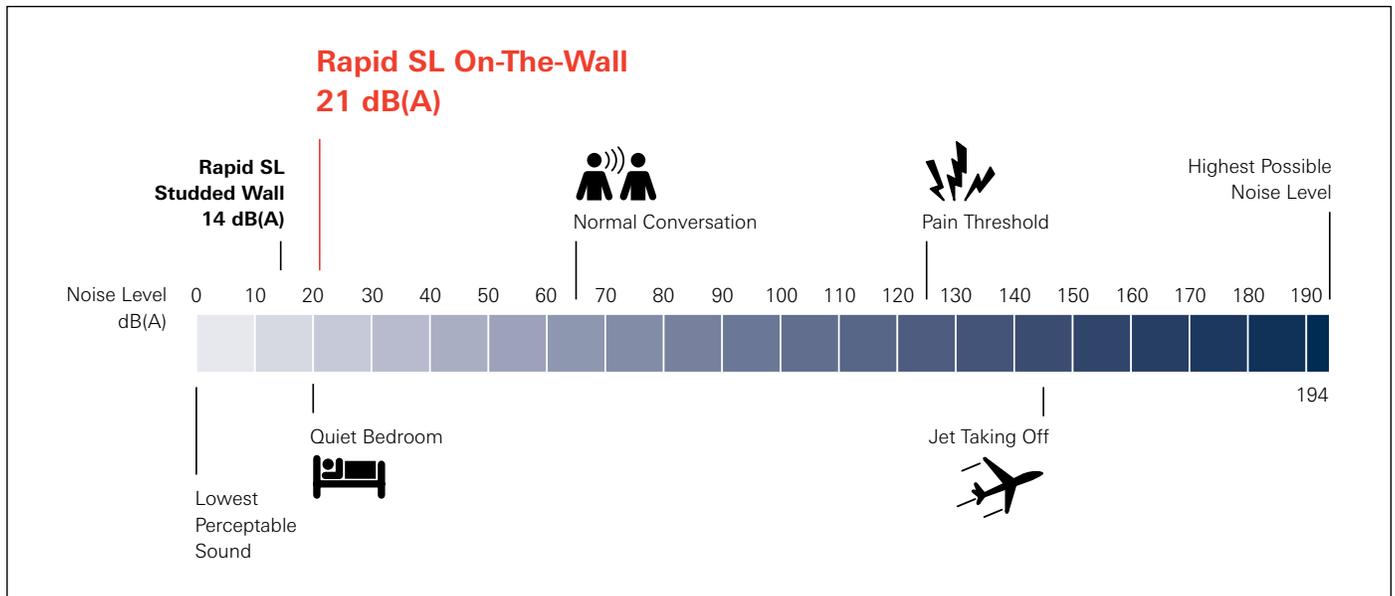

GROHE Whisper®

Thanks to decoupled pipe supports, sound isn't transferred to the structure of the building when the water is released from the cistern to the bowl, allowing for convenient toilet positioning without fear of disturbing others.

GROHE RAPID SL KEY FEATURES

Simple Maintenance



If any maintenance is required, the actuation plate is easily removed to expose the internal components. The opening behind the plate is large enough to allow direct access to the flush and discharge valve which are constructed so that they can be easily removed for any necessary maintenance.

Adjustable Toilet Height & ADA Compliance



Offering superior user comfort, GROHE Rapid SL allows for installation of wall mounted toilets with a rim height ranging from 15½" to 19½". Because of the unit's flexibility, Rapid SL can meet standard and ADA compliance.

Hygiene & Comfort



A traditional toilet can make cleaning difficult with many places for dirt, dust and germs to hide. A wall hung toilet mounted to a Rapid SL carrier does not touch the floor, offering a hygienic solution for easy and thorough cleaning.

Space Saver



Because the water cistern can be installed within the wall, Rapid SL saves approximately six inches of space compared to a standard toilet with a tank, making it ideal for small bathroom spaces.

RAPID SL SIMPLE & QUICK INSTALLATION

The Rapid SL system gives you the freedom to design your ultimate bathroom by providing a secure and quick method of installing wall-hung basins, bidets, urinals and WCs. Available in three different installation heights, each frame comes pre-assembled with sanitary ware fixings and is subject to stringent testing – our WC frames are tested to hold 880 lbs (400kg).



- 38 996 000**
Rapid SL for Toilet
For 2x4 wall installation
- Dual flush pneumatic actuation
 - Drain outlet connection: vertical only
 - Water supply: From top only
 - Actuation plate installation: vertical
 - Bowl rim height adjustment 15" to 19"
 - 24⁵/₈" overall width



- 38 749 001**
Rapid SL for Toilet
For 2x6 wall installation
- Dual flush pneumatic actuation
 - Drain outlet connection: horizontal or vertical
 - Water supply: From top, rear, left or right
 - Actuation plate installation: horizontal & vertical
 - Bowl rim height adjustment 15" to 19"
 - 19 ¹/₁₆" overall width



- 38 553 001**
Rapid SL for bidet
6" Cavity
- 19⁷/₁₆" overall width
 - 3.9 ft. installation height
 - Bowl rim height adjustments 15" to 19"



- 38 558 00M**
Rapid SL wall brackets
For on-the-wall installations & for mounting the units at the brick-wall or in front of the studded wall



- 15 906 040**
Cast Iron Elbow



- 38 779 000**
Rapid SL accessory
For short WCs
- Required for WCs that are less than 7 ¹/₈" (214mm) from the bolt holes to the bottom of the WC

RAPID SL CHOICE & FLEXIBILITY



In front of dry or studded wall to then create a mid-height wall



Whatever the size and shape of your bathroom, with Rapid SL you're no longer restricted to four walls. Thanks to our versatile frame system, the layout and design choices for your new bathroom are endless – the only limit is your imagination. Mid- and full-height walls can be introduced not only to 'zone' wet and dry areas but to provide additional space for basins and bidets. Ideal for commercial settings, the in-line installation of Rapid SL accommodates side-by-side application.

Rapid SL can be mounted in front of solid walls, inside or in front of studded or freestanding walls. This offers the freedom to decide between multiple design layouts and determine the most effective use of the bathroom space.




Within dry or studded full-height walls



In-line installation



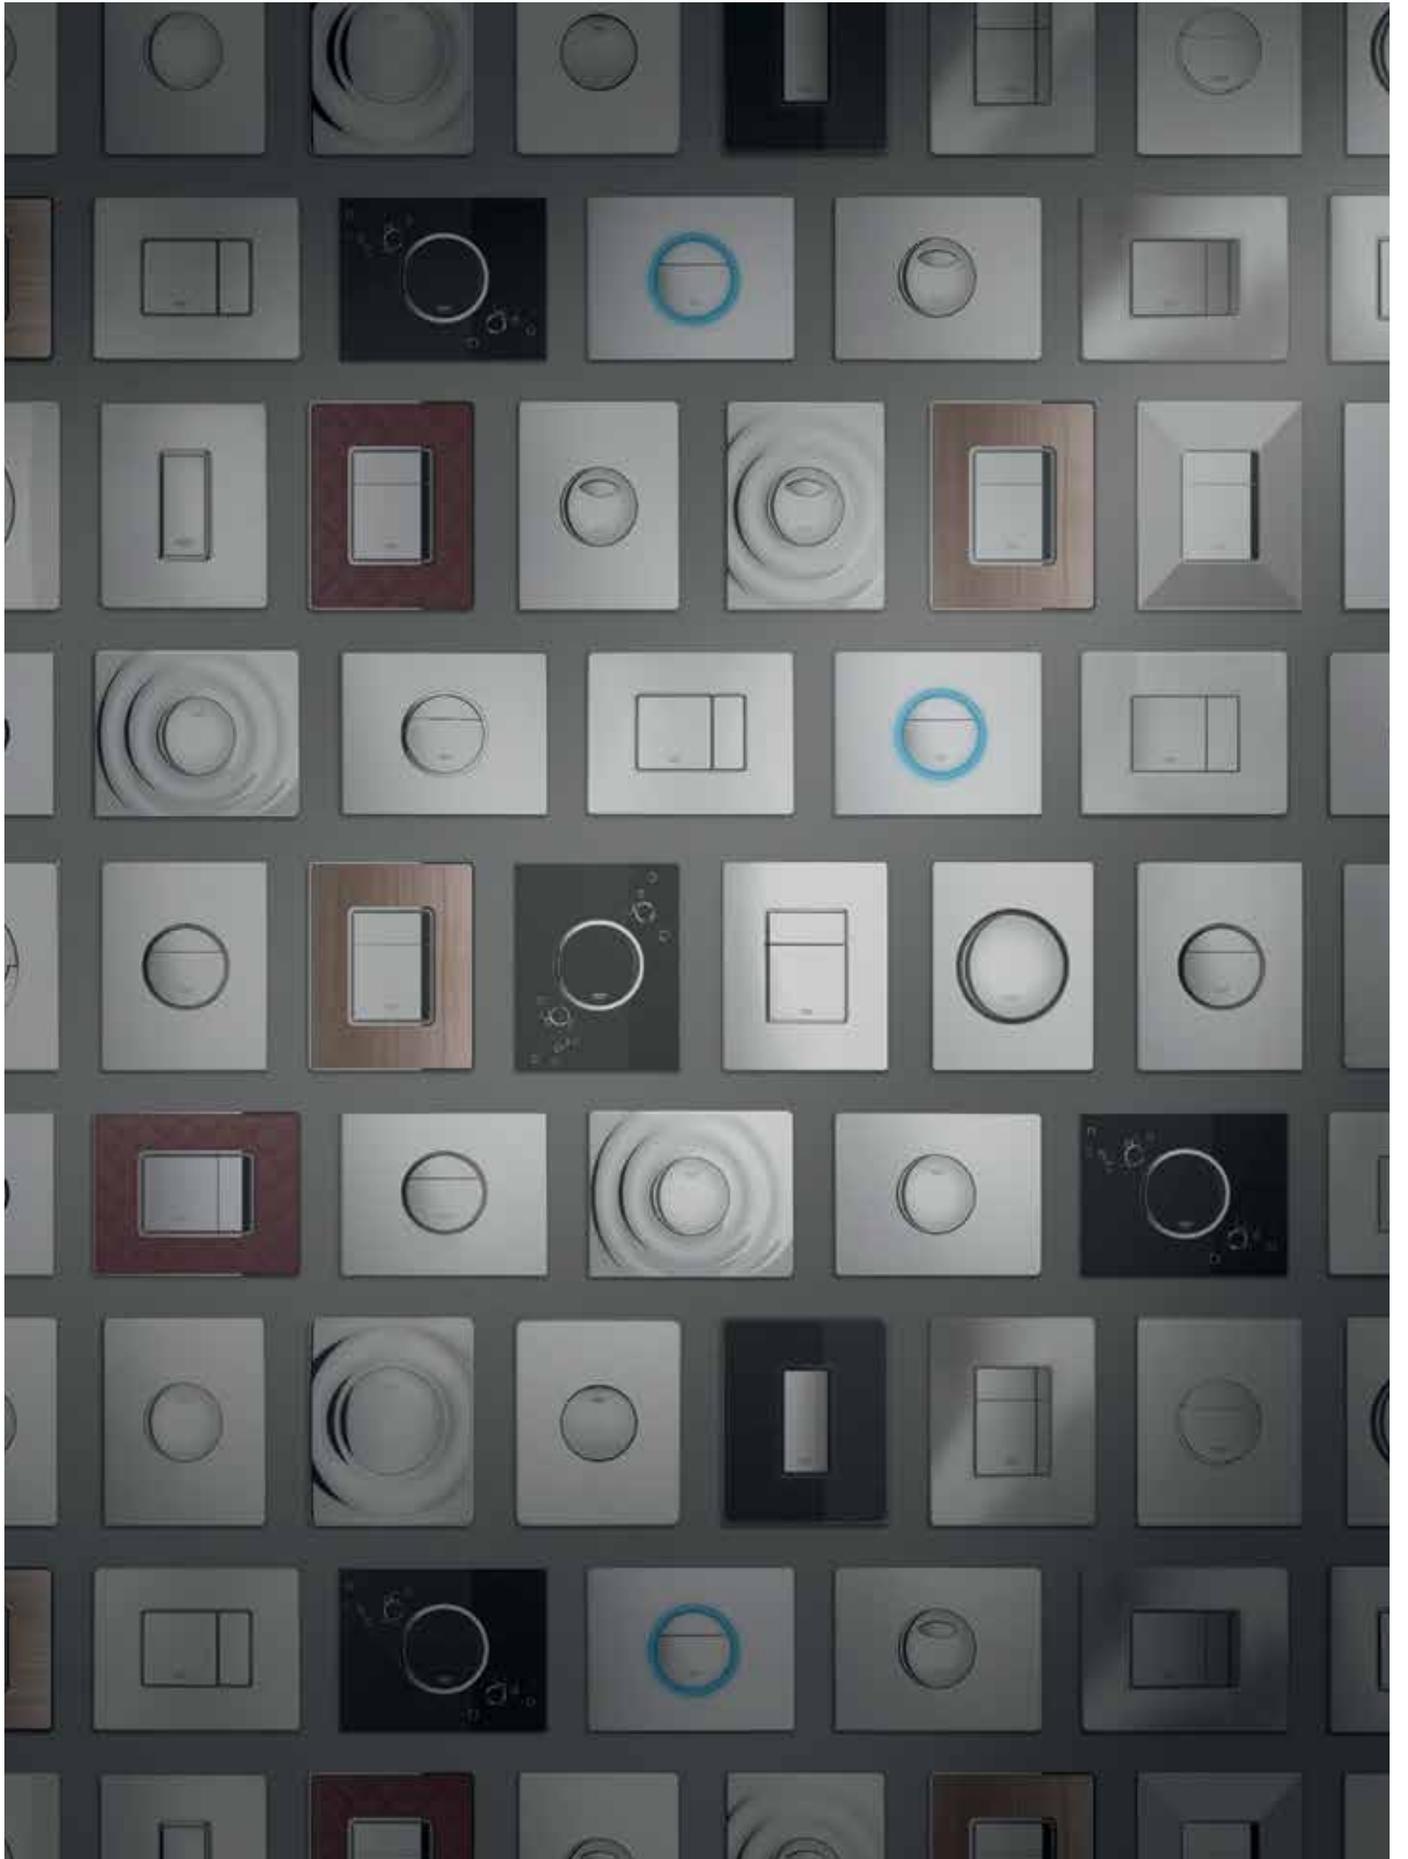

ACTUATION PLATES FOR DUAL FLUSH

Users have the choice between single or dual flush feature to reduce water consumption by more than 50%. Pressing the large button will release 1.6 gallons (6L) of water. Pressing the Eco button, flushes with a reduced 0.8 gallons (3L) volume.

GROHE actuation plates are pleasantly small measuring only 6 1/8" by 7 3/4".

Finish Guide:

000 – GROHE StarLight® Chrome	HWO – Natural Oak	SDO – GROHE RealSteel® Stainless Steel
BR0 – Titanium	KSO – Velvet Black	SH0 – Alpine White
BS0 – Chrome Titanium	LS0 – Moon White	XG0 – Black, Print
HPO – American Walnut	MF0 – Glass, Chrome DaVinci White	XM0 – Tannin, Red Leather
HRO – Macassar	OA0 – Mirror Glass	XN0 – Black Leather
HVO – Bamboo	P00 – Matte Chrome	



38 849 HPO/HWO/HVO/HRO
Skate Cosmopolitan
(vertical or horizontal installation)



★**38 913 XM0/XN0**
Skate Cosmopolitan
(vertical or horizontal installation)



38 914 XM0/XN0
Skate Cosmopolitan
(vertical or horizontal installation)



38 845 LS0/BS0/MF0/KSO
Skate Cosmopolitan
(vertical or horizontal installation)



★**38 859 XG0**
Skate Cosmopolitan
(vertical or horizontal installation)



38 732 000/BR0/P00/SH0/SDO
Skate Cosmopolitan
(vertical or horizontal installation)



38 916 OA0
Skate Cosmopolitan
(vertical or horizontal installation)



38 821 000
Skate Cosmopolitan
(vertical installation only)



38 776 SDO
Skate Cosmopolitan
(horizontal installation only)



38 862 000/P00/SH0
Skate
(vertical or horizontal installation)



38 505 000/P00/SH0
Skate Air
(vertical installation only)



38 506 000/P00/SH0
Skate Air
(horizontal installation only)



38 765 000/P00/SH0
Nova Cosmopolitan
(vertical or horizontal installation)



38 861 000/P00/SH0
Surf
(vertical or horizontal installation)



43 553 000
Surf Cover Plate
(for use with 38 771)



38 771 000
Eau2 Dual Flush Air
(for remote actuation)

NOTE: Products listed with ★ (stars) are available while supplies last.

GROHE America, Inc.
Tel: 1.800.44.GROHE (47643)
us-customerservice@grohe.com
www.grohe.com/us

Printed in the USA
© 05/2016 GROHE America, Inc.
Roselle, IL
#0516RSLWCACB

GROHE has a policy of continuous improvement and therefore reserves the right to alter product specifications without prior notice.



DISCOVER THE WORLD OF GROHE AT WWW.GROHE.COM/US



Follow us



PART OF **LIXIL**