


CR, CRI, CRN, CRE, CRIE, CRNE

Vertical multistage centrifugal pumps
60 Hz

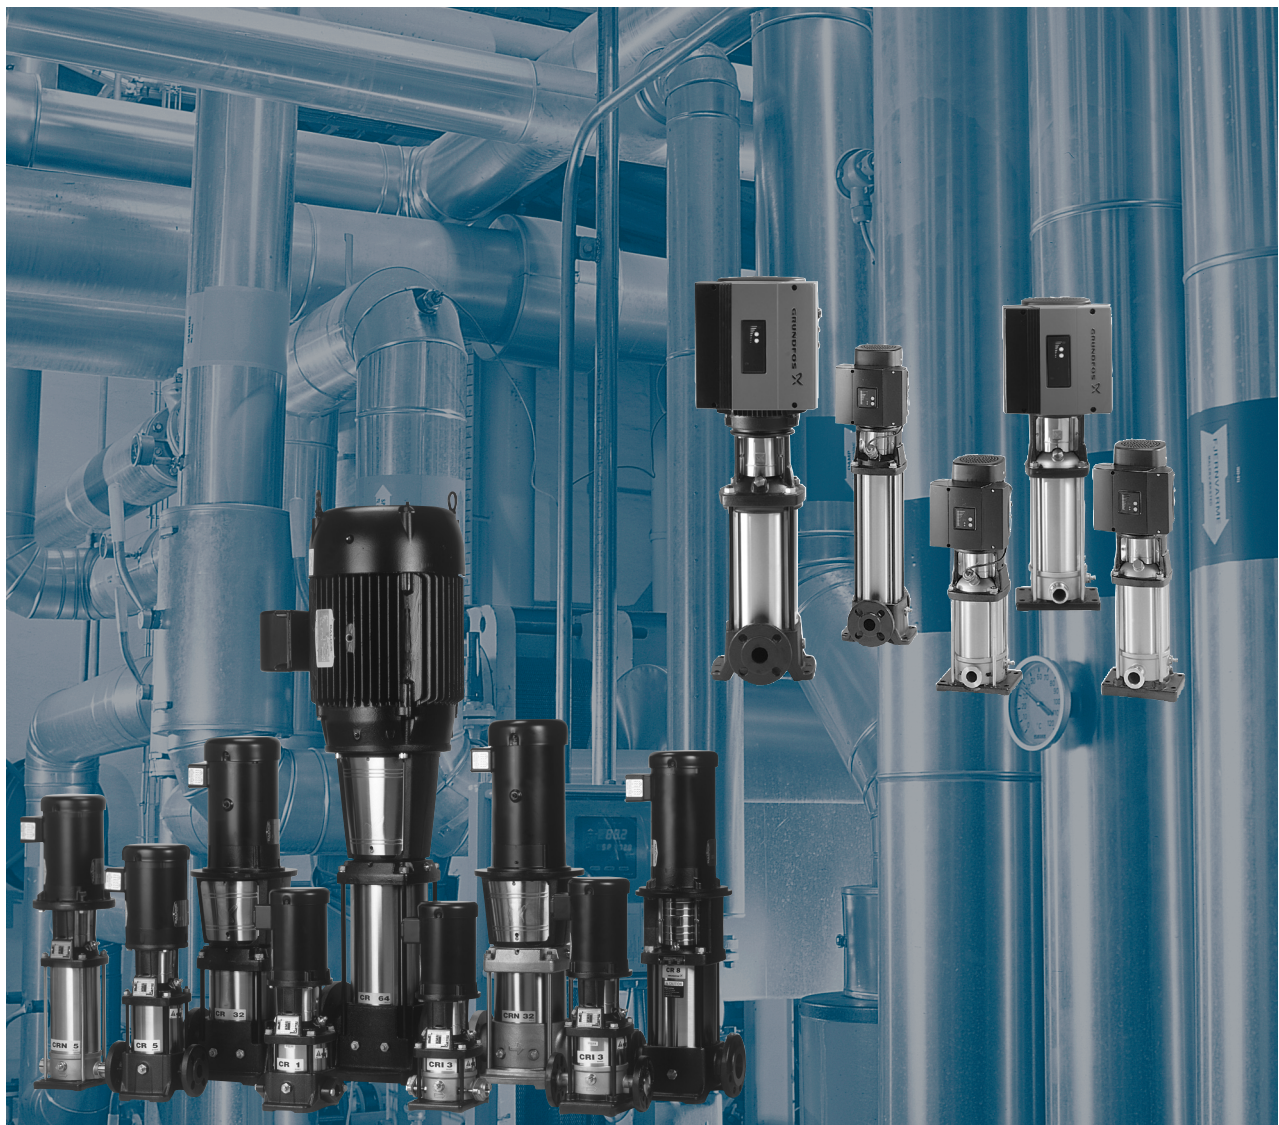

Contents

Mission	3	CR(E), CRI(E), CRN(E) 5	38
		CR(E), CRI(E), CRN(E) 10	42
		CR(E), CRI(E), CRN(E) 15	46
		CR(E), CRI(E), CRN(E) 20	50
		CR(E), CRN(E) 32	54
		CR(E), CRN(E) 45	57
		CR(E), CRN(E) 64	60
		CR, CRN 90	63
		CR, CRN 120	66
		CR, CRN 150	69
Product overview		Motor data	
Introduction	4	Standard motors in the CR range	72
Performance range	5	TEFC motors	72
Product range	6	ODP motors	73
Applications	8	MLE motors	73
Pump	9		
Motor	9		
Terminal box positions	10		
Ambient temperature	10		
Viscosity	10		
Product overview for E-pumps		Pumped liquids	
Examples of E-pump applications	11	Pumped liquids	74
		List of pumped liquids	74
Control of E-pumps			
Control options of E-pumps	12		
Control modes for E-pumps	12		
Construction		Accessories	
CR(E) 1s, 1, 3, 5, 10, 15 and 20	14	Pipework connection	77
CRI(E), CRN(E) 1s, 1, 3, 5, 10, 15 and 20	14	Potentiometer for CRE, CRIE, CRNE	81
CR(E) 32, 45, 64 and 90	15	G10-LON interface for CRE, CRIE, CRNE	81
CRN(E) 32, 45, 64 and 90	15	LiqTec for CR(E), CRI(E) and CRN(E)	81
CR(E) 120 and 150	16	Remote control, R100	81
CRN(E) 120 and 150	16	Sensors for CRE, CRIE, CRNE	82
		Gauges for CRE, CRIE, CRNE	82
Type keys and codes		Variants	
Type keys	17	Lists of variants - on request	83
Codes	17	Motors	83
		Connections and other variants	83
Operating and inlet pressure		Shaft seals	83
Maximum operating pressure and temperature range	18	Pumps	83
Operating range of the shaft seal	19		
Maximum inlet pressure	20	Submittal data sheet	84
Selection and sizing			
Selection of pumps	21	Quotation text	85
How to read the curve charts	25		
Guidelines to performance curves	25	Further product documentation	
Performance curves/		WebCAPS	89
Technical data		WinCAPS	90
CR, CRI, CRN 1s	26		
CR(E), CRI(E), CRN(E) 1	30		
CR(E), CRI(E), CRN(E) 3	34		

Mission

It is our mission — the basis of our existence — to successfully develop, produce and sell high-quality pumps and pumping systems worldwide, contributing to a better quality of life and a healthy environment



Bjerringbro, Denmark



Fresno, California



Olathe, Kansas



Monterrey, Mexico



Allentown, Pennsylvania



Oakville, Ontario

- The world's leading pump company
- World's largest manufacturer of circulator pumps
- World headquarters in Denmark
- North American headquarters in Kansas City - Manufacturing in Fresno, California
- 80 companies in 45 countries
- More than 16 million motors and pumps produced annually worldwide
- North American companies operating in USA, Canada and Mexico
- Continuous reinvestment in growth and development enables the company to **BE** responsible, **THINK** ahead, and **INNOVATE**

Introduction

This data booklet deals with CR, CRI and CRN as well as CRE, CRIE and CRNE pumps.

CR, CRI, CRN



Fig. 1 CR, CRI and CRN pumps

CR, CRI, CRN pumps are vertical multistage centrifugal pumps. The in-line design enables the pump to be installed in a horizontal one-pipe system where the suction and discharge ports are in the same horizontal plane and have the same pipe dimensions. This design provides a more compact pump design and pipework.

Grundfos CR pumps come with various pump sizes and various numbers of stages to provide the flow and the pressure required.

CR pumps are suitable for a variety of applications from pumping of potable water to pumping of chemicals. The pumps are therefore used in a wide variety of pumping systems where the performance and material of the pump meet specific demands.

The CR pumps consist of two main components: the motor and the pump unit. The motor on a CR pump is a heavy-duty Grundfos specified motor.

The pump unit consists of optimized hydraulics, various types of connections, an outer sleeve, a top and various other parts.

CR pumps are available in various material versions according to the pumped liquid.

CRE, CRIE, CRNE



Fig. 2 CRE, CRIE and CRNE pumps

CRE, CRIE, CRNE pumps are built on the basis of CR, CRI, CRN pumps.

CRE, CRIE, CRNE pumps belong to the so-called E-pump family and are referred to as E-pumps.

The difference between the CR and the CRE pump range is the motor. CRE, CRIE, CRNE pumps are fitted with an E-motor, i.e. a motor with built-in frequency control.

The motor of the CRE pump is a Grundfos MLE motor.

Frequency control enables continuously variable control of motor speed, which makes it possible to set the pump to operation at any duty point. The aim of continuously variable control of the motor speed is to adjust the performance to a given requirement.

CRE, CRIE and CRNE pumps are available with an integrated pressure sensor connected to the frequency control.

The pump materials are the same as those of the CR, CRI, CRN pump range.

Selecting a CRE pump


Select a CRE pump if:

- controlled operation is required, i.e. consumption fluctuates;
- constant pressure is required,
- communication with the pump is required.

Adaptation of performance through frequency-controlled speed control offers obvious advantages:


- Energy savings.
- Increased comfort.
- Control and monitoring of the pump performance.

Performance range - CR, CRI, CRN

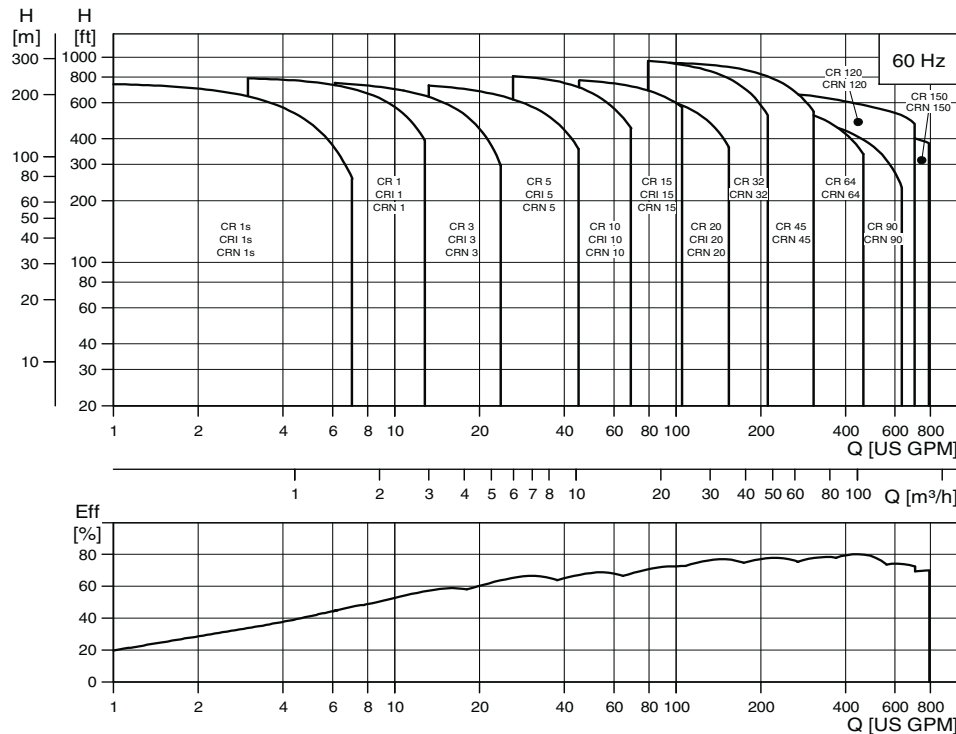

TM02 5518 0209

Performance range - CRE, CRIE, CRNE

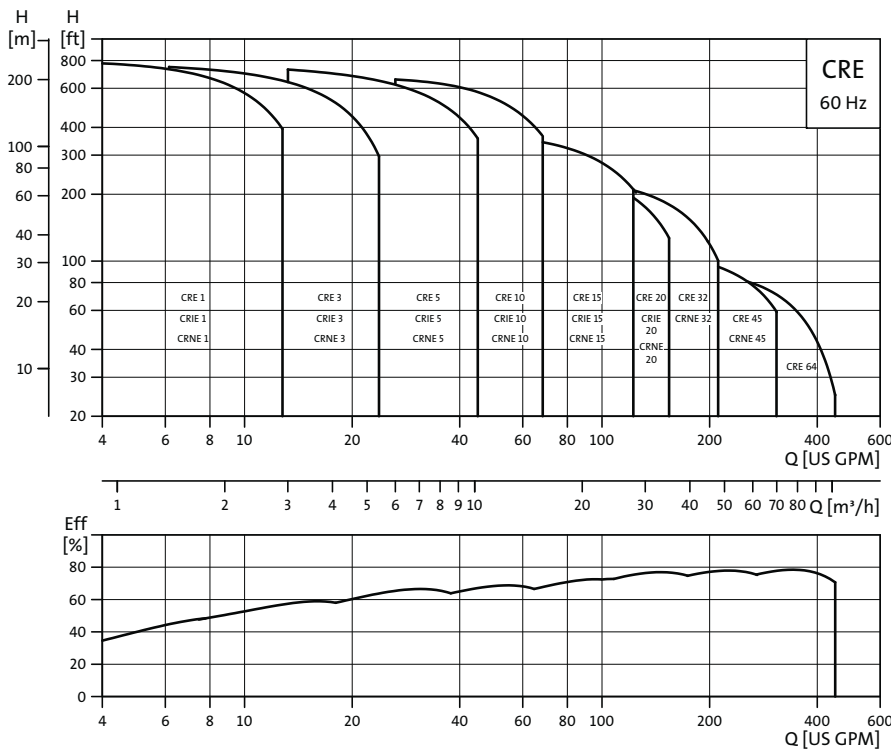

TM02 8094 4603

Product range

Range	CR 1s	CR 1	CR 3	CR 5	CR 10	CR 15	CR 20
Nominal flow rate [US GPM]	4.5	8.5	15	30	55	95	110
Temperature range [°F]	-4 to +250						
Temperature range [°F] - on request	-40 to +356						
Max. working pressure [psi]	362	362	362	362	362	362	362
Max. working pressure [psi] - on request	-	725	725	725	725	725	725
Max. pump efficiency [%]	35	49	59	67	70	72	72
CR pumps							
CR: Flow range [US GPM]	0.5-5.7	1 - 12.8	1.5 - 23.8	3 - 45	5.5 - 70	9.5 - 125	11-155
CR: Max. pump pressure (H[ft])	760	790	790	780	865	800	700
CR: Motor power [Hp]	.33 - 2	.33 - 3	.33 - 5	.75 - 7.5	.75 - 15	2 - 25	3-25
CRE pumps							
CRE: Flow range [US GPM]	-	0 - 12.8	0 - 23.8	0 - 45	0 - 70	0 - 125	0-155
CRE: Max. pump pressure (H[ft])	-	790	790	780	665	390	270
CRE: Motor power [Hp]	-	.33 - 3	.33 - 5	.75 - 7.5	.75 - 10	2 - 10	3-10
Version							
CR, CRE: Cast iron and stainless steel AISI 304	●	●	●	●	●	●	●
CRI, CRIE: Stainless steel AISI 304	●	●	●	●	●	●	●
CRN, CRNE: Stainless steel AISI 316	●	●	●	●	●	●	●
CRT, CRTE: Titanium	-	See CRT, CRTE product guide					-
CR, CRE pipe connection							
Oval flange (NPT)	1"	1"	1"	1.25"	2"	2"	2"
Oval flange (NPT) - on request	1.25"	1.25"	1.25"	1"	1.5"	-	-
ANSI flange size	1.25"	1.25"	1.25"	1.25"	2"	2"	2"
ANSI flange size - on request	-	-	-	-	-	-	-
ANSI flange class	250 lb.	250 lb.	250 lb.	250 lb.	250 lb.	250 lb.	250 lb.
CRI, CRIE pipe connection							
Oval flange (NPT)	1"	1"	1"	1.25"	2"	2"	2"
Oval flange (NPT) - on request	1.25"	1.25"	1.25"	1"	1.5"	-	-
ANSI flange size	1.25"	1.25"	1.25"	1.25"	2"	2"	2"
ANSI flange class	300 lb.	300 lb.	300 lb.	300 lb.	300 lb.	300 lb.	300 lb.
Clamp coupling (NPT) - on request	1", 1.25"	1", 1.25"	1", 1.25"	1", 1.25"	1.5", 2"	1.5", 2"	1.5", 2"
Union (NPT ext. Thread) - on request	2"	2"	2"	2"	-	-	-
CRN, CRNE pipe connection							
PJE (Victaulic)	1.25"	1.25"	1.25"	1.25"	2"	2"	2"
PJE (Victaulic) - on request	-	-	-	-	-	-	-
ANSI flange size	1.25"	1.25"	1.25"	1.25"	2"	2"	2"
ANSI flange size - on request	-	-	-	-	-	-	-
ANSI flange class	300 lb.	300 lb.	300 lb.	300 lb.	300 lb.	300 lb.	300 lb.
Clamp coupling (NPT) - on request	1", 1.25"	1", 1.25"	1", 1.25"	1", 1.25"	1.5", 2"	1.5", 2"	1.5", 2"
Union (NPT ext. Thread) - on request	2"	2"	2"	2"	-	-	-
CRT pipe connection							
PJE coupling (Vitaalic)	-	1.25"	1.25"	1.25"	2"	2"	-
ANSI flange size - on request	-	-	-	-	2"	2"	-

● Available

Product overview

CR, CRI, CRN, CRE, CRIE, CRNE

Range	CR 32	CR 45	CR 64	CR 90	CR 120	CR 150
Nominal flow rate [US GPM]	140	220	340	440	610	750
Temperature range [°F]	-22 to +250 ¹⁾				-22 to +250 ¹⁾ & ²⁾	
Temperature range [°F] – on request	-40 to +356				-	-
Max. working pressure [psi]	435	435	360	360	360	360
Max. working pressure [psi] – on request	580	580	580	580	-	-
Max. pump efficiency [%]	76	78	79	80	75	73
CR pumps						
CR: Flow range [US GPM]	14-210	22-310	34-450	44-630	61-700	75-790
CR: Max. pump pressure (H[ft])	995	940	565	595	685	570
CR: Motor power [Hp]	5-50	7.5-60	10-60	15-60	20-100	25-100
CRE pumps						
CRE: Flow range [US GPM]	0-210	0-310	0-450	-	-	-
CRE: Max. pump pressure (H[ft])	240	120	100	-	-	-
CRE: Motor power [Hp]	5-10	7.5-10	10	-	-	-
Version						
CR, CRE: Cast iron and stainless steel AISI 304	●	●	●	●	●	●
CRI, CRIE: Stainless steel AISI 304	-	-	-	-	-	-
CRN, CRNE: Stainless steel AISI 316	●	●	●	●	●	●
CRT, CRTE: Titanium	-	-	-	-	-	-
CR, CRE pipe connection						
Oval flange (NPT)	-	-	-	-	-	-
Oval flange (NPT) - on request	-	-	-	-	-	-
ANSI flange size	2.5"	3"	4"	4"	5" ³⁾	5" ³⁾
ANSI flange size - on request	3"	4"	5" ³⁾	5" ³⁾	6"	6"
ANSI flange class	125/ 250 lb.	125/ 250 lb.	125/ 250 lb.	125/ 250 lb.	125/ 250 lb.	125/ 250 lb.
CRI, CRIE pipe connection						
Oval flange (NPT)	-	-	-	-	-	-
Oval flange (NPT) - on request	-	-	-	-	-	-
ANSI flange size	-	-	-	-	-	-
ANSI flange class	-	-	-	-	-	-
Clamp coupling (NPT) - on request	-	-	-	-	-	-
Union (NPT ext. Thread) - on request	-	-	-	-	-	-
CRN, CRNE pipe connection						
PJE (Victaulic)	-	-	-	-	-	-
PJE (Victaulic) - on request	3"	4"	4"	4"	4"	4"
ANSI flange size	2.5"	3"	4"	4"	5"	5"
ANSI flange size - on request	3"	-	-	5"	6"	6"
ANSI flange class	150/ 300 lb.	150/ 300 lb.	150/ 300 lb.	150/ 300 lb.	150/ 300 lb.	150/ 300 lb.
Clamp coupling (NPT) - on request	-	-	-	-	-	-
Union (NPT ext. Thread) - on request	-	-	-	-	-	-
CRT pipe connection						
PJE coupling (Vitaualic)	-	-	-	-	-	-
ANSI flange size - on request	-	-	-	-	-	-

● Available

¹⁾ CRN 32 to CRN 90 with HQQE shaft seal: -40 °F to +250 °F

²⁾ CR, CRN 120 and 150 with 75 or 100 Hp motors with HBQE shaft seal: 0 °F to +250 °F

³⁾ CR 5" flange is not manufactured to ANSI specification. Gasket contact surface is approximately 0.25". CR 6" ANSI flange adapter is manufactured to ANSI B16.5 specification.

Applications

Application	CR, CRI	CRN	CRE, CRNE
Water supply			
Filtration and transfer at waterworks	●	○	●
Distribution from waterworks	●	○	●
Pressure boosting in mains	●	○	●
Pressure boosting in high-rise buildings, hotels, etc.	●	○	●
Pressure boosting for industrial water supply	●	○	●
Industry			
Pressure boosting in...			
process water systems	●	●	●
washing and cleaning systems	●	●	●
vehicle washing tunnels	●	○	●
fire fighting systems	●		
Liquid transfer in...			
cooling and air-conditioning systems (refrigerants)	●	○	●
boiler feed and condensate systems	●	○	●
machine tools (cooling lubricants)	●	●	●
aquafarming ★	●	○	
Transfer of...			
oils and alcohols	●	●	●
acids and alkalis ★		●	●
glycol and coolants	●		●
Water treatment			
Ultra-filtration systems		●	●
Reverse osmosis systems ★		●	●
Softening, ion exchange, demineralizing systems		●	●
Distillation systems		●	●
Separators	●	●	●
Swimming pools ★		●	●
Irrigation			
Field irrigation (flooding)	●	○	
Sprinkler irrigation	●	○	●
Drip-feed irrigation	●	○	

● Recommended version.

○ Alternative version.

★ CRT, CRTE version available. For further information about CRT, CRTE pumps see, "Pumped liquids" page 74 or related CRT, CRTE product guide.

Pump

The CR and CRE pump is a non-self-priming, vertical multistage centrifugal pump. The pumps are available with a Grundfos standard motor (CR pumps) or a frequency-controlled motor (CRE pumps).

The pump consists of a base and a pump head. The chamber stack and the outer sleeve are secured between the pump head and the base by means of staybolts. The base has suction and discharge ports on the same level (in-line).

All pumps are equipped with a maintenance-free mechanical shaft seal of the cartridge type.

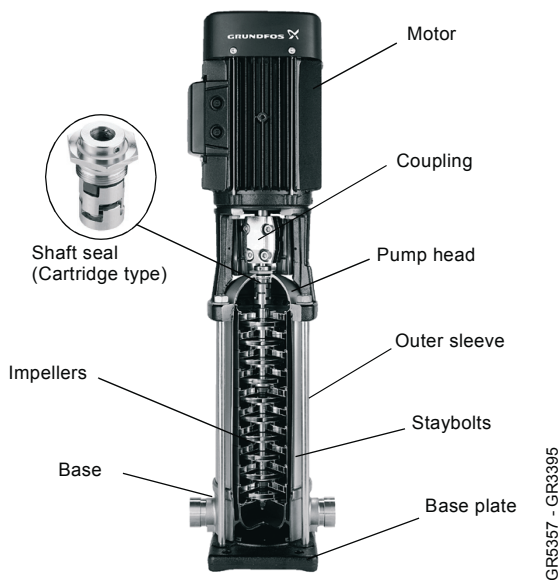


Fig. 3 CR pump

CR pump with ANSI/NSF 61 listing is available. See UL file MH26400 or contact Grundfos.

Motor

Grundfos standard motors - ML and Baldor® motors

CR, CRI and CRN pumps are fitted with a Grundfos specified motor. The motors are all heavy-duty 2-pole, NEMA C-face motors.

Frequency-controlled motors - MLE motors

CRE, CRIE and CRNE pumps are fitted with a totally enclosed, fan-cooled, 2-pole motor with integrated variable frequency drive.

From 0.5 Hp to 1.5 Hp Grundfos offers CRE pumps fitted with single-phase MLE motors (1 x 208-230 V). From 1.0 Hp to 10 Hp Grundfos offers CRE pumps fitted with three-phase MLE motors (3 x 460-480 V). From 1.5 Hp to 7.5 Hp Grundfos offers CRE pumps fitted with three-phase MLE motors (3 x 208-230 V).

Electrical data

Mounting designation	NEMA
Insulation class	F & B
Efficiency class*	Energy efficient Premium efficiency - on request for 15 Hp and above
Enclosure class	TEFC - Totally Enclosed Fan Cooled (Grundfos standard) ODP - Open Drip Proof - on request
60 Hz Standard voltages	1 x 115/208-230 V 3 x 208-230/460 V 3 x 575 V
The motors are rated for:	
Approvals	Baldor ML/MLE   

* 1 - 10 Hp ML motors are premium efficiency as standard

Optional motors

The Grundfos standard range of motors covers a wide variety of application demands. However, for special applications or operating conditions, custom-built motor solutions can be provided.

For special applications or operating conditions, Grundfos offers custom-built motors such as:

- explosion proof motors,
- motors with anti-condensation heating unit,
- low-noise motors,
- premium efficiency motors,
- motors with thermal protection.

Motor protection

Single-phase Grundfos specified motors up to 7.5 hp have a built-in thermal overload switch.

Three-phase motors **must** be connected to a motor starter in accordance with local regulations.

Terminal box positions

As standard the terminal box is mounted on the suction side of the pump.

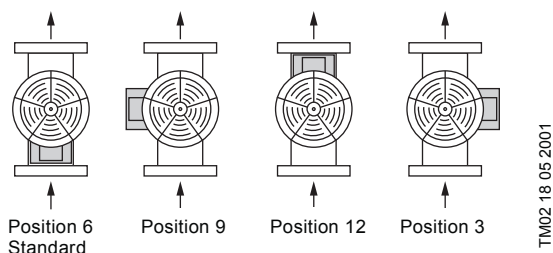


Fig. 4 Terminal box positions

Ambient temperature

Ambient temperature: Maximum +104 °F.

If the ambient temperature exceeds +104 °F or if the motor is located 3280 feet above sea level or higher, the motor output (P2) must be reduced due to the low cooling effect of the air. In such cases, it may be necessary to use a motor with a higher output.

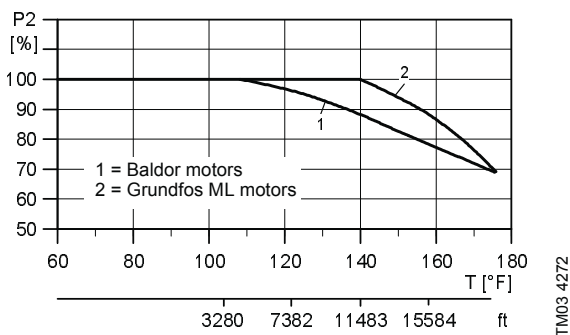


Fig. 5 Relationship between motor output (P2) and ambient temperature

Viscosity

The pumping of liquids with densities or kinematic viscosities higher than those of water will cause a considerable pressure drop, a drop in the hydraulic performance and a rise in the power consumption.

In such situations the pump should be equipped with a larger motor. If in doubt, contact Grundfos.

Examples of E-pump applications

CRE, CRIE and CRNE pumps are the ideal solution in a number of applications characterized by a need for variable flow at constant pressure. The pumps are suited for water supply systems and pressure boosting, but also industrial applications.

Depending on the nature of the application, the pumps offer energy-savings, increased comfort or improved processing.

E-pumps in the service of industry

Industry uses a large number of pumps in many different applications. Demands on pumps in terms of pump performance and mode of operation make speed control a must in many applications.

Below are mentioned some of the applications in which E-pumps are often used.

Constant pressure

- Water supply,
- Washing and cleaning systems,
- Distribution from waterworks,
- Humidifying systems,
- Water treatment systems,
- Process boosting systems, etc.

Example: Within industrial water supply, E-pumps with integrated pressure sensors are used to ensure a constant pressure in the piping network. From the sensor, the E-pump receives inputs about changes of pressure as a result of changes in the consumption. The E-pump responds to the input by adjusting the flow until the pressure is equalized. The constant pressure is stabilized once more on the basis of a preset setpoint.

Constant temperature

- Air-conditioning systems at industrial plants,
- Industrial cooling systems,
- Industrial freezing systems,
- Casting and molding tools, etc.

Example: In industrial freezing systems, E-pumps with temperature sensor increase comfort and lower operating costs compared with pumps without a temperature sensor.

An E-pump continuously adapts its performance to the changing demands reflected in the differences in temperature of the liquid circulating in the freezing system. Thus, the lower the demand for cooling, the smaller the quantity of liquid circulated in the system and vice versa.

Constant flow

- Steam boiler systems,
- Condensate systems,
- Sprinkler irrigation systems,
- Chemical industry, etc.

Example: In a steam boiler, it is important to be able to monitor and control pump operation to maintain a constant level of water in the boiler.

By using an E-pump with level sensor mounted in the boiler, it is possible to maintain a constant water level. A constant water level ensures optimum and cost-efficient operation as a result of a stable steam production.

Dosing

- Chemical industry (i.e. control of pH-values),
- Petrochemical industry,
- Paint industry
- Degreasing systems,
- Bleaching systems, etc.

Example: In the petrochemical industry, E-pumps with pressure sensors are used as dosing pumps. The E-pumps help to ensure that the correct mixture ratio is achieved when more liquids are combined.

E-pumps functioning as dosing pumps improve processing and offer energy-savings.

E-pumps in commercial building services

Commercial building services use E-pumps to maintain a constant pressure or a constant temperature based on a variable flow.

E-pumps are used in applications such as

Constant pressure

- Water supply in high-rise buildings i.e. office buildings, hotels, etc.

Example: E-pumps with pressure sensors are used for water supply in high-rise buildings to ensure a constant pressure even at the highest draw-off point. As the consumption pattern and by that the pressure changes during the day, the E-pump continuously adapts its performance until the pressure is equalized.

Constant temperature

- Air-conditioning systems in hotels, schools,
- Building cooling systems, etc.

Example: E-pumps are an excellent solution in buildings where constant temperature is essential. E-pumps keep the temperature constant in air-conditioned high-rise glass buildings, irrespective of the seasonal fluctuations of the out-door temperature, and various heat impacts inside the building.

Control options of E-pumps

Communication with CRE, CRIE, CRNE pumps is possible by means of

- a central management system,
- remote control (Grundfos R100) or
- a control panel.

The purpose of controlling an E-pump is to monitor and control the pressure, temperature, flow and liquid level of the system.

Central management system

Communication with the E-pump is possible even though the operator is not present near the E-pump. Communication is enabled by having connected the E-pump to a central management system allowing the operator to monitor and change control modes and setpoint settings of the E-pump.

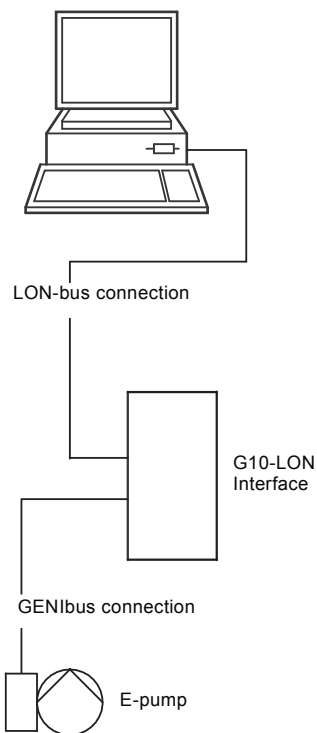



Fig. 6 Structure of a central management system

TM06592 1103

Remote control

The R100 remote control produced by Grundfos is available as an accessory.

The operator communicates with the E-pump by pointing the IR-signal transmitter at the control panel of the E-pump terminal box.




TM00 4498 2802

Fig. 7 R100 remote control

On the R100 display it is possible to monitor and change control modes and settings of the E-pump.

Control panel

The control panel of the E-pump terminal box makes it possible to change the setpoint settings manually.

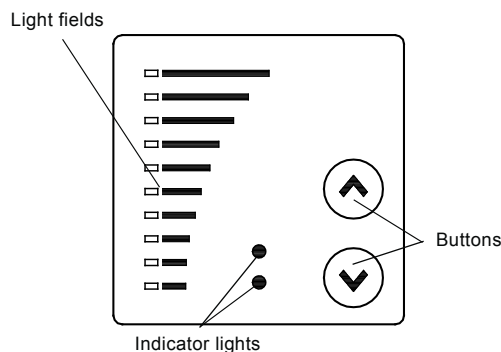

TM00 7600 1196

Fig. 8 Control panel on CRE pump

Control modes for E-pumps

Grundfos offers CRE, CRIE and CRNE pumps in two different variants:

- CRE, CRIE and CRNE with integrated pressure sensor
- CRE, CRIE and CRNE without sensor.

CRE, CRIE, CRNE with integrated pressure sensor

CRE, CRIE and CRNE pumps with integrated pressure sensors are suitable for applications where you want to control the pressure after the pump, irrespective of the flow. For further information, see the section *Examples of E-pump applications* on page 11. Signals of pressure changes in the piping system are transmitted continuously from the sensor to the pump.

The pump responds to the signals by adjusting its performance up or down to compensate for the pressure difference between the actual and the desired pressure. As this adjustment is a continuous process, a constant pressure is maintained in the piping system.




TM02 7398 3403

Fig. 9 CRE, CRIE and CRNE pumps

A CRE, CRIE or CRNE pump with integrated pressure sensor facilitates installation and commissioning. CRE, CRIE and CRNE pumps with integrated pressure sensor can be set to:

- constant-pressure mode (factory setting) or
- constant-curve mode.


In **constant-pressure** mode, the pump maintains a preset pressure after the pump, irrespective of the flow, see figure below.



TM00 9322 4796

Fig. 10 Constant pressure mode

In **constant-curve** mode, the pump is not controlled. It can be set to pump according to a preset pump characteristic within the range from min. curve to max. curve, see figure below.



TM00 9323 4796

Fig. 11 Constant curve mode

CRE, CRIE and CRNE without sensor


CRE, CRIE and CRNE pumps without sensors are suitable for applications where

- uncontrolled operation is required
- you want to fit another sensor later in order to control the flow, temperature, differential temperature, liquid level, pH value, etc at some arbitrary point in the system.

CRE, CRIE and CRNE pumps without sensor can be set to:

- controlled-operation mode or
- uncontrolled-operation mode (factory-setting).


In **controlled**-operation mode, the pump adjusts its performance to the desired setpoint, see figure below.



TM02 7264 2803

Fig. 12 Constant flow mode

In **uncontrolled**-operation mode, the pump operates according to the constant curve set, see figure below.



TM00 9323 4796

Fig. 13 Constant curve mode


CRE, CRIE and CRNE pumps can be fitted with sensor types listed on page 82.

CR(E) 1s, 1, 3, 5, 10, 15 and 20



TM02 1198 0601 - GR7377 - GR7379

Sectional drawing

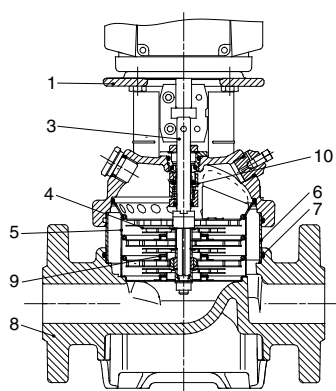

TM02 1194 1403

Materials: CR(E)

Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Cast iron	A 48-30 B
3	Shaft	Stainless steel	AISI 316 ¹⁾ AISI 431 ²⁾
4	Impeller	Stainless steel	AISI 304
5	Chamber	Stainless steel	AISI 304
6	Outer sleeve	Stainless steel	AISI 304
7	O-ring for outer sleeve	EPDM or FKM	
8	Base	Cast iron	A 48-30 B
9	Neck ring	PTFE	
10	Shaft seal	Cartridge type	
	Bearing rings	Silicon carbide	
	Rubber parts	EPDM or FKM	
12	FJG flange	Cast iron	A 48-30 B

¹⁾ CR(E) 1s, 1, 3, 5

²⁾ CR(E) 10, 15, 20

³⁾ Stainless steel available on request.

⁴⁾ CF 8M is cast equivalent of AISI 316 stainless steel.

⁵⁾ CRI(E)/CRN(E) 1s, 1, 3, 5

⁶⁾ CRN(E) 10, 15, 20


⁷⁾ CRI(E) 10, 15, 20

CRI(E), CRN(E) 1s, 1, 3, 5, 10, 15 and 20



TM02 1808 2001 - GR7373 - GR7375

Sectional drawing

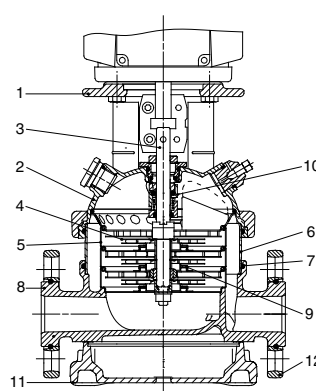

TM03 2156 3805

Materials: CRI(E), CRN(E)


Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Cast iron ³⁾	A 48-30 B
2	Pump head cover	Stainless steel	CF 8M ⁴⁾
3	Shaft	Stainless steel	AISI 316 ⁵⁾ AISI 329 ⁶⁾ AISI 431 ⁷⁾
8	Base	Stainless steel	CF 8M ⁴⁾
9	Neck ring	PTFE	
10	Shaft seal	Cartridge type	
11	Base plate	Cast iron ³⁾	A 48-30 B
	Bearing rings	Silicon carbide	
	Rubber parts	EPDM or FKM	
CRI(E)			
4	Impeller	Stainless steel	AISI 304
5	Chamber	Stainless steel	AISI 304
6	Outer sleeve	Stainless steel	AISI 304
7	O-ring for outer sleeve	EPDM or FKM	
12	FGJ flange ring	Ductile iron ³⁾	A 65-45-12
	Oval flange	Stainless steel	AISI 316
CRN(E)			
4	Impeller	Stainless steel	AISI 316
5	Chamber	Stainless steel	AISI 316
6	Outer sleeve	Stainless steel	AISI 316
7	O-ring for outer sleeve	EPDM or FKM	
12	FGJ flange ring	Ductile iron ³⁾	A 65-45-12

CR(E) 32, 45, 64 and 90



TM01 2150 1298

Sectional drawing

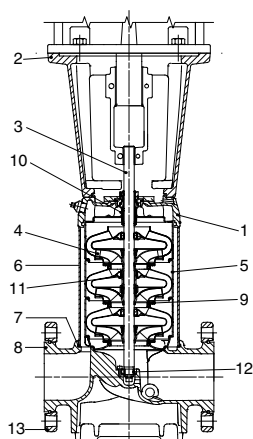

TM03 2157 3805

Materials: CR(E)


Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Ductile iron	A 65-45-12
2	Motor stool	Cast iron	A 48-30 B
3	Shaft	Stainless steel	AISI 431
4	Impeller	Stainless steel	AISI 304
5	Chamber	Stainless steel	AISI 304
6	Outer sleeve	Stainless steel	AISI 304
7	O-ring for outer sleeve	EPDM or FKM	
8	Base	Ductile iron	A 65-45-12
9	Neck ring	Acoflon 215	
10	Shaft seal	Cartridge type	
11	Bearing ring	Bronze	
12	Bottom bearing ring	Tungsten carbide/ Tungsten carbide	
13	Flange ring	Ductile iron ²⁾	A 65-45-12
	Rubber parts	EPDM or FKM	

CRN(E) 32, 45, 64 and 90



TM02 7399 3403

Sectional drawing

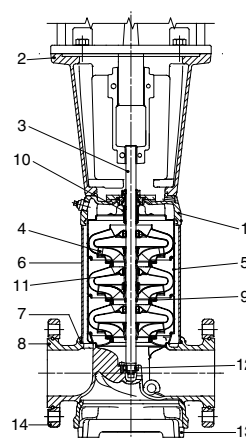

TM03 2158 3805

Materials: CRN(E)

Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Stainless steel	CF 8M ¹⁾
2	Motor stool	Cast iron	A 48-30 B
3	Shaft	Stainless steel	SAF 2205
4	Impeller	Stainless steel	AISI 316
5	Chamber	Stainless steel	AISI 316
6	Outer sleeve	Stainless steel	AISI 316
7	O-ring for outer sleeve	EPDM or FKM	
8	Base	Stainless steel	CF 8M ¹⁾
9	Neck ring	Acoflon 215	
10	Shaft seal	Cartridge type	
11	Bearing ring	Carbon-graphite filled PTFE	
12	Bottom bearing ring	Tungsten carbide/ Tungsten carbide	
13	Base plate	Ductile iron ²⁾	A 65-45-12
14	Flange ring	Ductile iron ²⁾	A 65-45-12
	Rubber parts	EPDM or FKM	

¹⁾ CF 8M is cast equivalent of AISI 316 stainless steel.


²⁾ Stainless steel available on request.

CR(E) 120 and 150



GrA3731

Sectional drawing

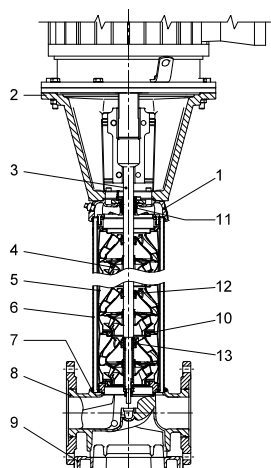

TM03 8835 2607

Materials: CR(E)

Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Ductile iron	A 536 65-45-12
2	Motor stool (15-60 Hp)	Cast iron	A48-30 B
	Motor stool (75-100 Hp)	Ductile iron	A 536 65-45-12
3	Shaft	Stainless steel	AISI 431
4	Impeller	Stainless steel	AISI 304
5	Chamber	Stainless steel	AISI 304
6	Outer sleeve	Stainless steel	AISI 316
7	O-ring for outer sleeve	EPDM or FKM	
8	Base	Ductile iron	A 536 65-45-12
9	Base plate	Ductile iron	A 536 65-45-12
10	Neck ring	PTFE	
11	Shaft seal ¹⁾	Cartridge type	
12	Support bearing	PTFE	
13	Bearing rings	Silicone carbide	
	Rubber parts	EPDM or FKM	


¹⁾ Ø22 mm shaft, 15-60 Hp. Ø32 mm shaft, 75-100 Hp.

CRN(E) 120 and 150



GrA3732 - GrA3735

Sectional drawing

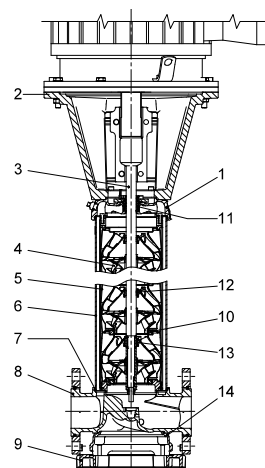

TM03 8836 2607

Materials: CRN(E)

Pos.	Designation	Materials	AISI/ASTM
1	Pump head	Stainless steel	A 351 CF 8M
2	Motor stool (15-60 Hp)	Cast iron	A48-30 B
	Motor stool (75-100 Hp)	Ductile iron	A 536 65-45-12
3	Shaft	Stainless steel	SAF 2205
4	Impeller	Stainless steel	AISI 316
5	Chamber	Stainless steel	AISI 316
6	Outer sleeve	Stainless steel	AISI 316
7	O-ring for outer sleeve	EPDM or FKM	
8	Base	Stainless steel	A 351 CF 8M
9	Base plate	Ductile iron ¹⁾	A 536 65-45-12
10	Neck ring	PTFE	
11	Shaft seal ²⁾	Cartridge type	
12	Support bearing	PTFE	
13	Bearing rings	Silicone carbide	
14	Base plate	Ductile iron ¹⁾	A 536 65-45-12
	Rubber parts	EPDM or FKM	

¹⁾ Stainless steel available on request.

²⁾ Ø22 mm shaft, 15-60 Hp. Ø32 mm shaft, 75-100 Hp.

Type keys and codes

CR, CRI, CRN, CRE, CRIE, CRNE

Type keys

CR(E), CRI(E), CRN(E)

Example	CR	E	32 (s)	-4	-2	-A	-G	-G	-E	HQQE
Type range: CR, CRI, CRN										
Pump with integrated frequency control										
Nominal flow rate [m ³ /h]										
All impellers with reduced diameter (applies only to CR, CRI, CRN 1s)										
Number of impellers										
Number of reduced diameter impellers (CR(E), CRN(E) 32, 45, 64, 90, 120, and 150)										
Code for pump version										
Code for pipe connection										
Code for materials										
Code for rubber parts										
Code for shaft seal										



Codes

Example	A	-G	-A	-E	-H	QQ	E
Pump version							
A Basic version ¹⁾							
B Oversize motor							
E Certificate/approval							
F CR pump for high temperatures (air-cooled top assembly)							
H Horizontal version							
HS High-pressure pump with high speed MLE motor							
I Different pressure rating							
J Pump with different max speed							
K Pump with low NPSH							
M Magnetic drive							
N Fitted with sensor							
P Undersize motor							
R Horizontal version with bearing bracket							
SF High pressure pump							
T Over size motor (two flange sizes bigger)							
U NEMA version ¹⁾							
X Special version							
Pipe connection							
A Oval flange							
B NPT thread							
CA FlexiClamp (CRI(E), CRN(E) 1, 3, 5, 10, 15, 20)							
CX Triclap (CRI(E), CRN(E) 1, 3, 5, 10, 15, 20)							
F DIN flange							
G ANSI flange							
J JIS flange							
N Changed diameter of ports							
P PJE coupling							
X Special version							

Example	A	-G	-A	-E	-H	QQ	E
Materials							
A Basic version							
D Carbon-graphite filled PTFE (bearings)							
G Wetted parts AISI 316							
GI All parts stainless steel, wetted parts AISI 316							
I Wetted parts AISI 304							
II All parts stainless steel, wetted parts AISI 304							
K Bronze (bearings)							
S SiC bearings + PTFE neck rings							
X Special version							
Code for rubber parts							
E EPDM							
F FXM							
K FFKM							
V FKM							
Shaft seal							
A O-ring seal with fixed driver							
B Rubber bellows seal							
E Cartridge seal with O-ring							
H Balanced cartridge seal with O-ring							
K Metal bellows cartridge seal							
O Double seal, back-to-back							
P Double seal, tandem							
X Special version							
B Carbon, synthetic resin-impregnated							
H Cemented tungsten carbide, embedded (hybrid)							
Q Silicon carbide							
U Cemented tungsten carbide							
X Other ceramics							
E EPDM							
F FXM							
K FFKM							
V FKM							

¹⁾ In August 2003 the NEMA version pump code was discontinued for all material numbers created by Grundfos manufacturing companies in North America. The NEMA version pump code will still remain in effect for existing material numbers. NEMA version pumps built in North America after this change will have either an A or U as the pump version code depending on the date the material number was created.


Maximum operating pressure and temperature range

Oval flange				ANSI, Clamp, PJE	
					
		Max. permissible operating pressure	Liquid temperature range	Max. permissible operating pressure	Liquid temperature range
CR, CRI, CRN 1s		232 [psi]	-4 °F to +248 °F	362 [psi]	-4 °F to +248 °F
CR(E), CRI(E), CRN(E) 1		232 [psi]	-4 °F to +248 °F	362 [psi]	-4 °F to +248 °F
CR(E), CRI(E), CRN(E) 3		232 [psi]	-4 °F to +248 °F	362 [psi]	-4 °F to +248 °F
CR(E), CRI(E), CRN(E) 5		232 [psi]	-4 °F to +248 °F	362 [psi]	-4 °F to +248 °F
CR(E) 10-1	CR(E) 10-6	145 [psi]	-4 °F to +248 °F	-	-
CRI(E), CRN(E) 10-1	CRI(E), CRN(E) 10-10	232 [psi]	-4 °F to +248 °F	-	-
CR(E), CRI(E) 10-1	CR(E), CRI(E) 10-10	-	-	232 [psi]	-4 °F to +248 °F
CR(E), CRI(E) 10-12	CR(E), CRI(E) 10-17	-	-	362 [psi]	-4 °F to +248 °F
CRN(E) 10		-	-	362 [psi]	-4 °F to +248 °F
CR(E) 15-1	CR(E) 15-5	145 [psi]	-4 °F to +248 °F	-	-
CRI(E), CRN(E) 15-1	CRI(E), CRN(E) 15-8	232 [psi]	-4 °F to +248 °F	-	-
CR(E), CRI(E) 15-1	CR(E), CRI(E) 15-8	-	-	232 [psi]	-4 °F to +248 °F
CR(E), CRI(E) 15-9	CR(E), CRI(E) 15-12	-	-	362 [psi]	-4 °F to +248 °F
CRN(E) 15		-	-	362 [psi]	-4 °F to +248 °F
CR(E) 20-1	CR(E) 20-5	145 [psi]	-4 °F to +248 °F	-	-
CRI(E), CRN(E) 20-1	CRI(E), CRN(E) 20-7	232 [psi]	-4 °F to +248 °F	-	-
CR(E), CRI(E) 20-1	CR(E), CRI(E) 20-7	-	-	232 [psi]	-4 °F to +248 °F
CR(E), CRI(E) 20-8	CR(E), CRI(E) 20-10	-	-	362 [psi]	-4 °F to +248 °F
CRN(E) 20		-	-	362 [psi]	-4 °F to +248 °F
CR(E), CRN(E) 32-1-1	CR(E), CRN(E) 32-5	-	-	232 [psi]	-22 °F to +248 °F
CR, CRN 32-6-2	CR, CRN 32-11-2	-	-	435 [psi]	-22 °F to +248 °F
CR(E), CRN(E) 45-1-1	CR(E), CRN(E) 45-4-2	-	-	232 [psi]	-22 °F to +248 °F
CR(E), CRN(E) 45-4-1	CR, CRN 45-8-1	-	-	435 [psi]	-22 °F to +248 °F
CR(E), CRN(E) 64-1-1	CR(E), CRN(E) 64-3	-	-	232 [psi]	-22 °F to +248 °F
CR(E), CRN(E) 64-4-2	CR(E), CRN(E) 64-5-2	-	-	435 [psi]	-22 °F to +248 °F
CR(E), CRN(E) 90-1-1	CR(E), CRN(E) 90-3	-	-	232 [psi]	-22 °F to +248 °F
CR(E), CRN(E) 90-4-2	CR(E), CRN(E) 90-4-1	-	-	435 [psi]	-22 °F to +248 °F
CR(E), CRN(E) 120-1-1	CR(E), CRN(E) 120-5-1	-	-	435 [psi]	-22 °F to +248 °F
CR(E), CRN(E) 150-1-1	CR(E), CRN(E) 150-4-1	-	-	435 [psi]	-22 °F to +248 °F

Operating range of the shaft seal

The operating range of the shaft seal depends on operating pressure, pump type, type of shaft seal and liquid temperature. The following curves apply to clean water and water with anti-freeze liquids. For selecting the right shaft seal, see *List of pumped liquids* on page 74.


CR 1s - CR 20

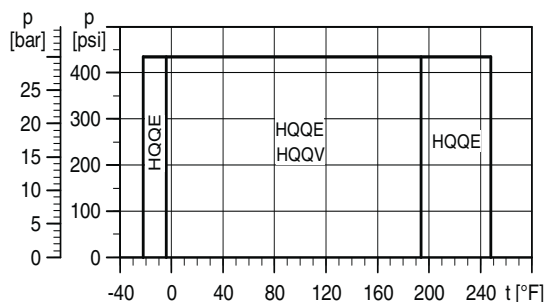

TM02 7537 3703

Fig. 14 Operating range of standard shaft seals for CR 1s - CR 20


CR 32 - CR 150 (3.0-60 Hp)

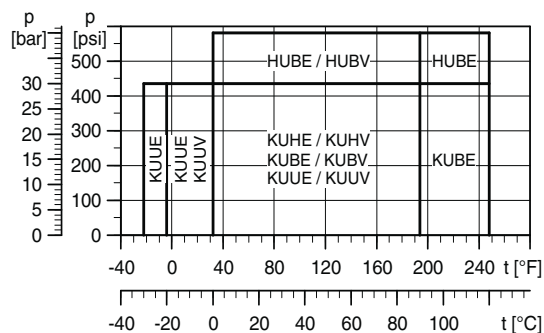

TM02 7873 0604

Fig. 15 Operating range of standard shaft seals for CR 32 - CR 150 (3.0-60 Hp)

CR 120 - CR 150 (75-100 Hp)

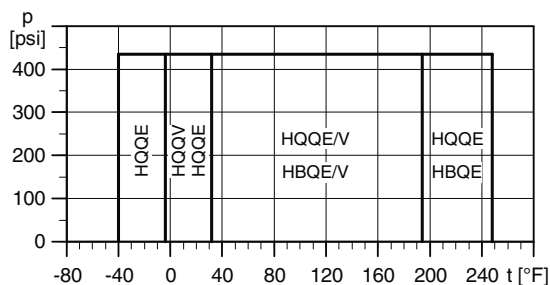

TM04 4415

Fig. 16 Operating range of standard shaft seals for CR 120 - CR 150 (75-100 Hp)

Shaft seal	Description	Max. temp. range [°F]
HQQE	O-ring (cartridge) (balanced seal), SiC/SiC, EPDM	-22 °F to +248 °F
HBQE	O-ring (cartridge) (balanced seal), Carbon/SiC, EPDM	+32 °F to +248 °F
HQQV	O-ring (cartridge) (balanced seal), SiC/SiC, FKM	-4 °F to +194 °F
HUBE	O-ring (cartridge) (balanced seal), TC/carbon, EPDM	+32 °F to +248 °F
HUBV	O-ring (cartridge) (balanced seal), TC/carbon, FKM	+32 °F to +194 °F
KUBE	Bellows, metal (cartridge), TC/carbon, EPDM	+32 °F to +248 °F
KUBV	Bellows, metal (cartridge), TC/carbon, FKM	+32 °F to +194 °F
KUHE	Bellows, metal (cartridge), TC/Carbon with embedded TC, EPDM	+32 °F to +194 °F
KUHV	Bellows, metal (cartridge), TC/Carbon with embedded TC, FKM	+32 °F to +194 °F
KUUE	Bellows, metal (cartridge), TC/TC, EPDM	-22 °F to +194 °F
KUUV	Bellows, metal (cartridge), TC/TC, FKM	-4 °F to +194 °F

Note: TC= tungsten carbide

See section *Lists of variants - on request* on page 83, in case of extreme temperatures:

- low temperatures down to -40 °F or
- high temperatures up to +356 °F.

Maximum inlet pressure

The following table shows the maximum permissible inlet pressure. However, the current inlet pressure + the pressure against a closed valve **must** always be lower than the maximum permissible operating pressure.

If the maximum permissible operating pressure is exceeded, the conical bearing in the motor may be damaged and the life of the shaft seal reduced.

CR, CRI, CRN 1s		
1s-2	› 1s-27	145 [psi]
CR(E), CRI(E), CRN(E) 1		
1-2	› 1-25	145 [psi]
1-27		218 [psi]
CR(E), CRI(E), CRN(E) 3		
3-2	› 3-15	145 [psi]
3-17	› 3-25	218 [psi]
CR(E), CRI(E), CRN(E) 5		
5-2	› 5-9	145 [psi]
5-10	› 5-24	218 [psi]
CR(E), CRI(E), CRN(E) 10		
10-1	› 10-5	116 [psi]
10-6	› 10-17	145 [psi]
CR(E), CRI(E), CRN(E) 15		
15-1	› 15-2	116 [psi]
15-3	› 15-12	145 [psi]
CR(E), CRI(E), CRN(E) 20		
20-1		116 [psi]
20-2	› 20-10	145 [psi]
CR(E), CRN(E) 32		
32-1-1	› 32-2	58 [psi]
32-3-2	› 32-6	145 [psi]
32-7-2	› 32-11-2	218 [psi]
CR(E), CRN(E) 45		
45-1-1	› 45-1	58 [psi]
45-2-2	› 45-3	145 [psi]
45-4-2	› 45-8-1	218 [psi]
CR(E), CRN(E) 64		
64-1-1		58 [psi]
64-1	› 64-2-1	145 [psi]
64-2	› 64-5-2	218 [psi]
CR(E), CRN(E) 90		
90-1-1	› 90-2-2	145 [psi]
90-2-1	› 90-4-1	218 [psi]
CR(E), CRN(E) 120		
120-1		145 [psi]
120-2-2	› 120-3	218 [psi]
120-4-2	› 120-5-1	290 [psi]
CR(E), CRN(E) 150		
150-1-1		145 [psi]
150-1	› 150-2	218 [psi]
150-3-2	› 150-4-1	290 [psi]

Example of operating and inlet pressures

The values for operating and inlet pressures shown in the tables must not be considered individually but must always be compared, see the following examples:

Example 1:

The following pump type has been selected:

CR 3-10 A-A-A

Max. operating pressure: **232 psi**

Max. inlet pressure: **145 psi**

Discharge pressure against a closed valve: **139.2 psi**, see page 34.

This pump is not allowed to start at an inlet pressure of 145 psi, but at an inlet pressure of $232.0 - 139.2 =$ **92.8 psi**.

Example 2:

The following pump has been selected:

CR 10-2 A-GJ-A

Max. operating pressure: **232 psi**

Max. inlet pressure: **116 psi**

Discharge pressure against a closed valve:

42 psi (97 ft), see page 42.

This pump is allowed to start at an inlet pressure of 116 psi, as the discharge pressure is only 42 psi, which results in an operating pressure of $116 + 42 =$ **158 psi**. On the contrary, the max. operating pressure of this pump is limited to 158 psi, as a higher operating pressure will require an inlet pressure of more than 116 psi.

In case the inlet or operating pressure exceeds the pressure permitted, see section *Lists of variants - on request* on page 83.

Selection of pumps

Selection of pumps should be based on

- The duty point of the pump (see section 1)
- Sizing data such as pressure loss as a result of height differences, friction loss in the pipework, pump efficiency etc. (see section 2)
- Pump materials (see section 3)
- Pump connections (see section 4)
- Shaft seal (see section 5).

1. Duty point of the pump

From a duty point it is possible to select a pump on the basis of the curve charts in the section *Performance curves/Technical data* starting on page 26.

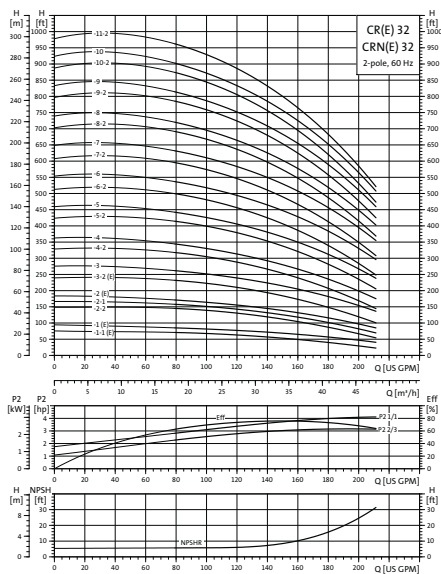


Fig. 17 Example of a curve chart

2. Sizing data

When sizing a pump the following must be taken into account.

- Required flow and pressure at the point of use.
- Pressure loss as a result of height differences (H_{geo}).
- Friction loss in the pipework (H_f).
It may be necessary to account for pressure loss in connection with long pipes, bends or valves, etc.
- Best efficiency at the estimated duty point.
- NPSH value.

For calculation of the NPSH value, see *Minimum inlet pressure - NPSHA* on page 24.

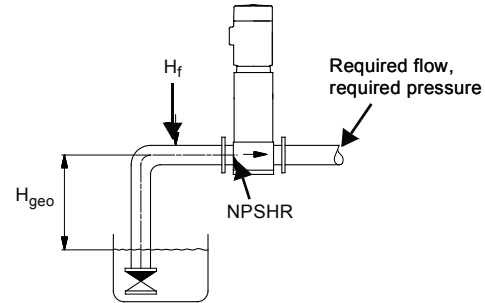


Fig. 18 Sizing data

Efficiency

Before determining the point of best efficiency the operation pattern of the pump needs to be identified. Is the pump expected to operate at the same duty point, then select a CR pump which is operating at a duty point corresponding with the best efficiency of the pump.

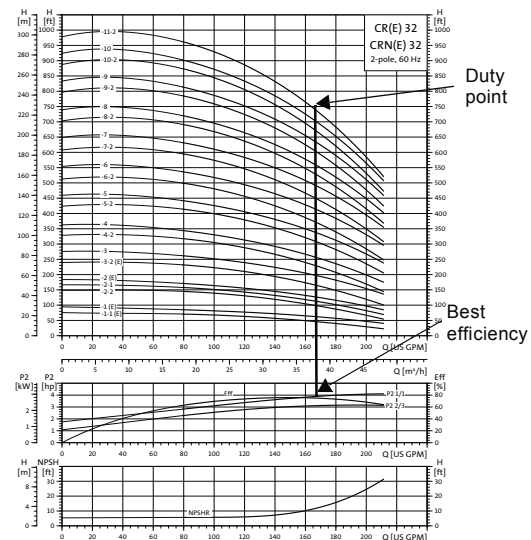


Fig. 19 Example of a CR pump's duty point

As the pump is sized on the basis of the highest possible flow, it is important to always have the duty point to the right of the optimum efficiency point (see fig. 20, range with check mark). This must be considered in order to keep efficiency high when the flow drops.

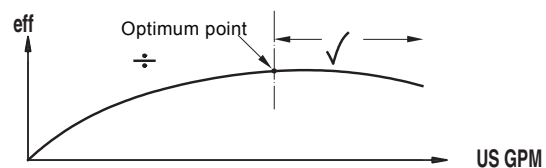


Fig. 20 Best efficiency

Normally, E-pumps are used in applications characterized by a variable flow. Consequently, it is not possible to select a pump that is constantly operating at optimum efficiency.

In order to achieve optimum operating economy, the pump should be selected on the basis of the following criteria:

- The max. required duty point should be as close as possible to the QH curve of the pump.
- The required duty point should be positioned so that P2 is close to the max. point of the 100 % curve.

Between the min. and max. performance curve E-pumps have an infinite number of performance curves each representing a specific speed. Therefore it may not be possible to select a duty point close to the 100 % curve.

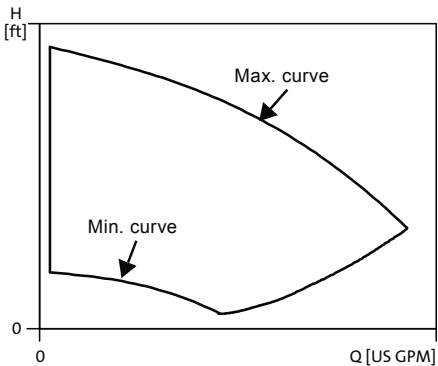


Fig. 21 Min. and max. performance curves

In situations where it is not possible to select a duty point close to the 100 % curve the affinity equations to the right can be used. The head (H), the flow (Q) and the input power (P) are all the appropriate variables for the motor speed (n).

Note:

The approximated formulas apply on condition that the system characteristic remains unchanged for n_n and n_x and that it is based on the formula $H = k \times Q^2$, where k is a constant.

The power equation implies that the pump efficiency is unchanged at the two speeds. In practice this is **not** quite correct.

Finally, it is worth noting that the efficiencies of the frequency converter and the motor **must** be taken into account if a precise calculation of the power saving resulting from a reduction of the pump speed is wanted.

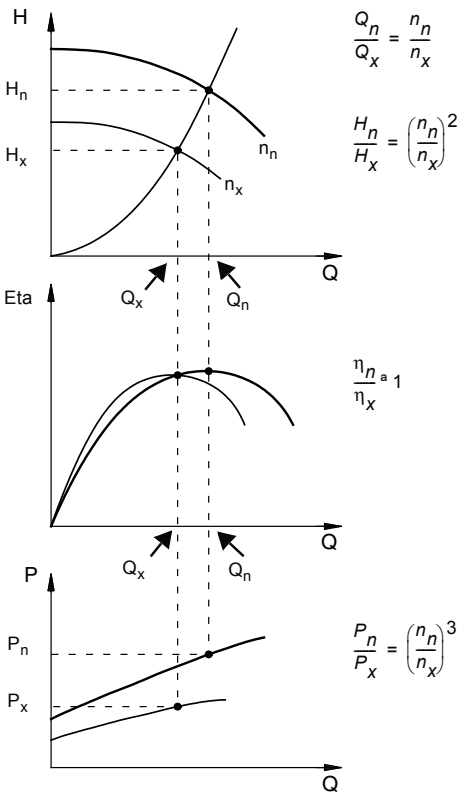


Fig. 22 Affinity equations

Legend

H_n	Rated head in feet
H_x	Current head in feet
Q_n	Rated flow in US GPM
Q_x	Current flow in US GPM
n_n	Rated motor speed in min^{-1} ($n_n = 3500 \text{ min}^{-1}$)
n_x	Current motor speed in min^{-1}
η_n	Rated efficiency in %
η_x	Current efficiency in %

WinCAPS and WebCAPS

WinCAPS and WebCAPS are both selection programs offered by Grundfos.

The two programs make it possible to calculate an E-pump's specific duty point and energy consumption.

By entering the sizing data of the pump, WinCAPS and WebCAPS can calculate the exact duty point and energy consumption. For further information see page 89 and page 90.

3. Material

The material variant (CR(E), CRI(E), CRN(E)) should be selected based of the liquid to be pumped. The product range covers three basic types.

- The CR(E), CRI(E) pump types are suitable for clean, non-aggressive liquids such as potable water, oils, etc.
- The CRN(E) pump type is suitable for industrial liquids and acids, see *List of pumped liquids* on page 74 or contact Grundfos.

For saline or chloride-containing liquids such as sea water, CRT(E) pumps of titanium are available.

4. Pump connection

Selection of pump connection depends on the rated pressure and pipework. To meet any requirement the CR(E), CRI(E) and CRN(E) pumps offer a wide range of flexible connections such as:

- Oval flange (NPT) - fig. 24
- ANSI flange - fig. 24
- PJE coupling - fig. 24
- Clamp coupling
- Union (NPT[M])
- Other connections on request.

5. Shaft seal

As standard, the CR(E) range is fitted with a Grundfos shaft seal (Cartridge type) suitable for the most common applications, see fig. 25.

The following three key parameters **must** be taken into account, when selecting the shaft seal:


- Type of pumped liquid
- liquid temperature and
- Maximum pressure.

Grundfos offers a wide range of shaft seal variants to meet specific demands see *List of pumped liquids* on page 74.

6. Inlet pressure and operating pressure


Do **not** exceed the limit values stated on page 18 and page 20 as regards these pressures:

- maximum inlet pressure and
- maximum operating pressure.




TM03 2155 3805

Fig. 23 CR pump

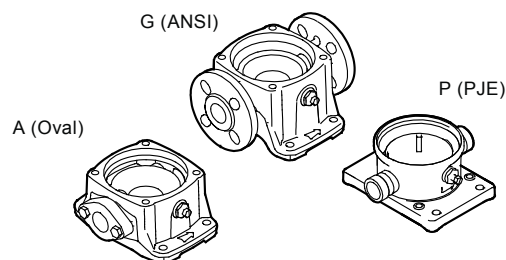

TM02 1201 0601

Fig. 24 Pump connections



TM02 0538 4800

Fig. 25 Shaft seal (Cartridge type)

Minimum inlet pressure - NPSHA

Calculation of the inlet pressure "H" is recommended in these situations:

- The liquid temperature is high,
- The flow is significantly higher than the rated flow,
- Water is drawn from depths,
- Water is drawn through long pipes,
- Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump. The maximum suction lift "H" in feet can be calculated as follows:

$$H = p_b - \text{NPSHR} - H_f - H_v - H_s$$

P_b = Barometric pressure in feet absolute.
(Barometric pressure can be set to 33.9 feet.
At sea level. In closed systems, p_b indicates
system pressure in feet.)

NPSHR = Net Positive Suction Head Required in feet.
(To be read from the NPSHR curve at the
highest flow the pump will be delivering).

H_f = Friction loss in suction pipe in feet.
(At the highest flow the pump will be
delivering.)

H_v = Vapor pressure in feet. (To be read from the
vapor pressure scale. " H_v " depends on the
liquid temperature " T_m ").

H_s = Safety margin = minimum 2.0 feet.

If the "H" calculated is positive, the pump can operate
at a suction lift of maximum "H" feet.

If the "H" calculated is negative, an inlet pressure of
minimum "H" feet is required.

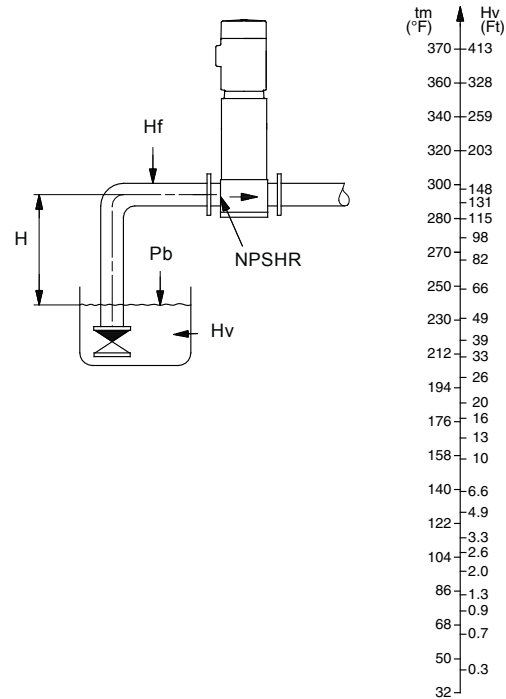


Fig. 26 Minimum inlet pressure - NPSHR

Note: In order to avoid cavitation **never**, select a pump whose duty point lies too far to the right on the NPSHR curve.

Always check the NPSHR value of the pump at the highest possible flow.

In case a lower NPSHR value is required, see *Lists of variants - on request* on page 83.

TM02 7729 3903

How to read the curve charts

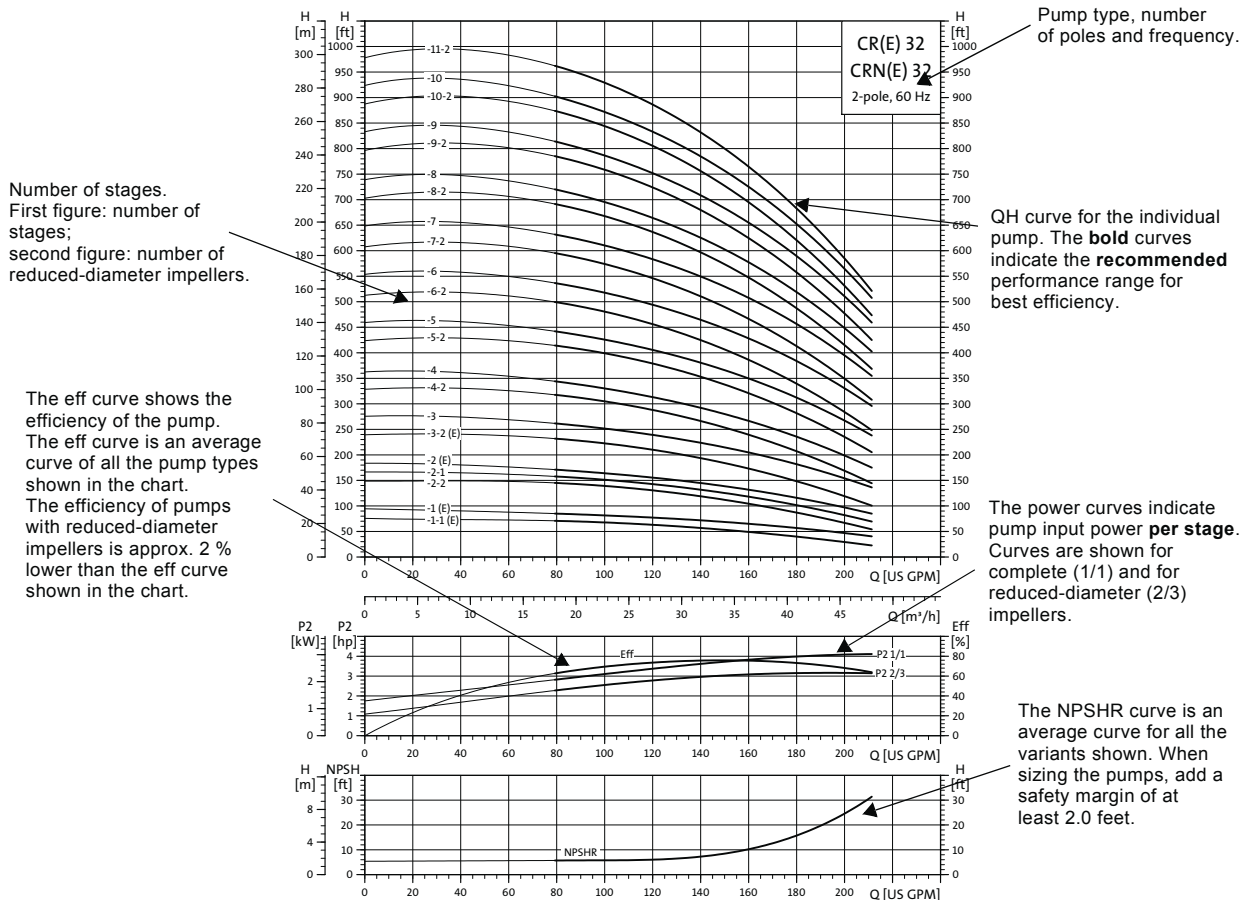


Fig. 27 How to read the curve charts

Guidelines to performance curves

The guidelines below apply to the curves shown on the following pages:

1. The motors used for the measurements are stand-ard motors (ODP, TEFC or MLE).
2. Measurements have been made with airless water at a temperature of 68 °F.
3. The curves apply to a kinematic viscosity of $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt).
4. Due to the risk of overheating, the pumps should not be used at a flow below the minimum flow rate.
5. The QH curves apply to actual speed with the motor types mentioned at 60 Hz.

The curve below shows the minimum flow rate as a percentage of the nominal flow rate in relation to the liquid temperature. The dotted line shows a CR pump fitted with an air-cooled top assembly.

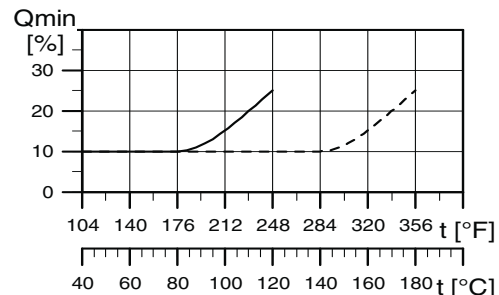


Fig. 28 Minimum flow rate


TM02 0039 1303

TM02 7538 3703


Performance curves/ Technical data

CR 1s, CRI 1s, CRN 1s


CR, CRI, CRN 1s

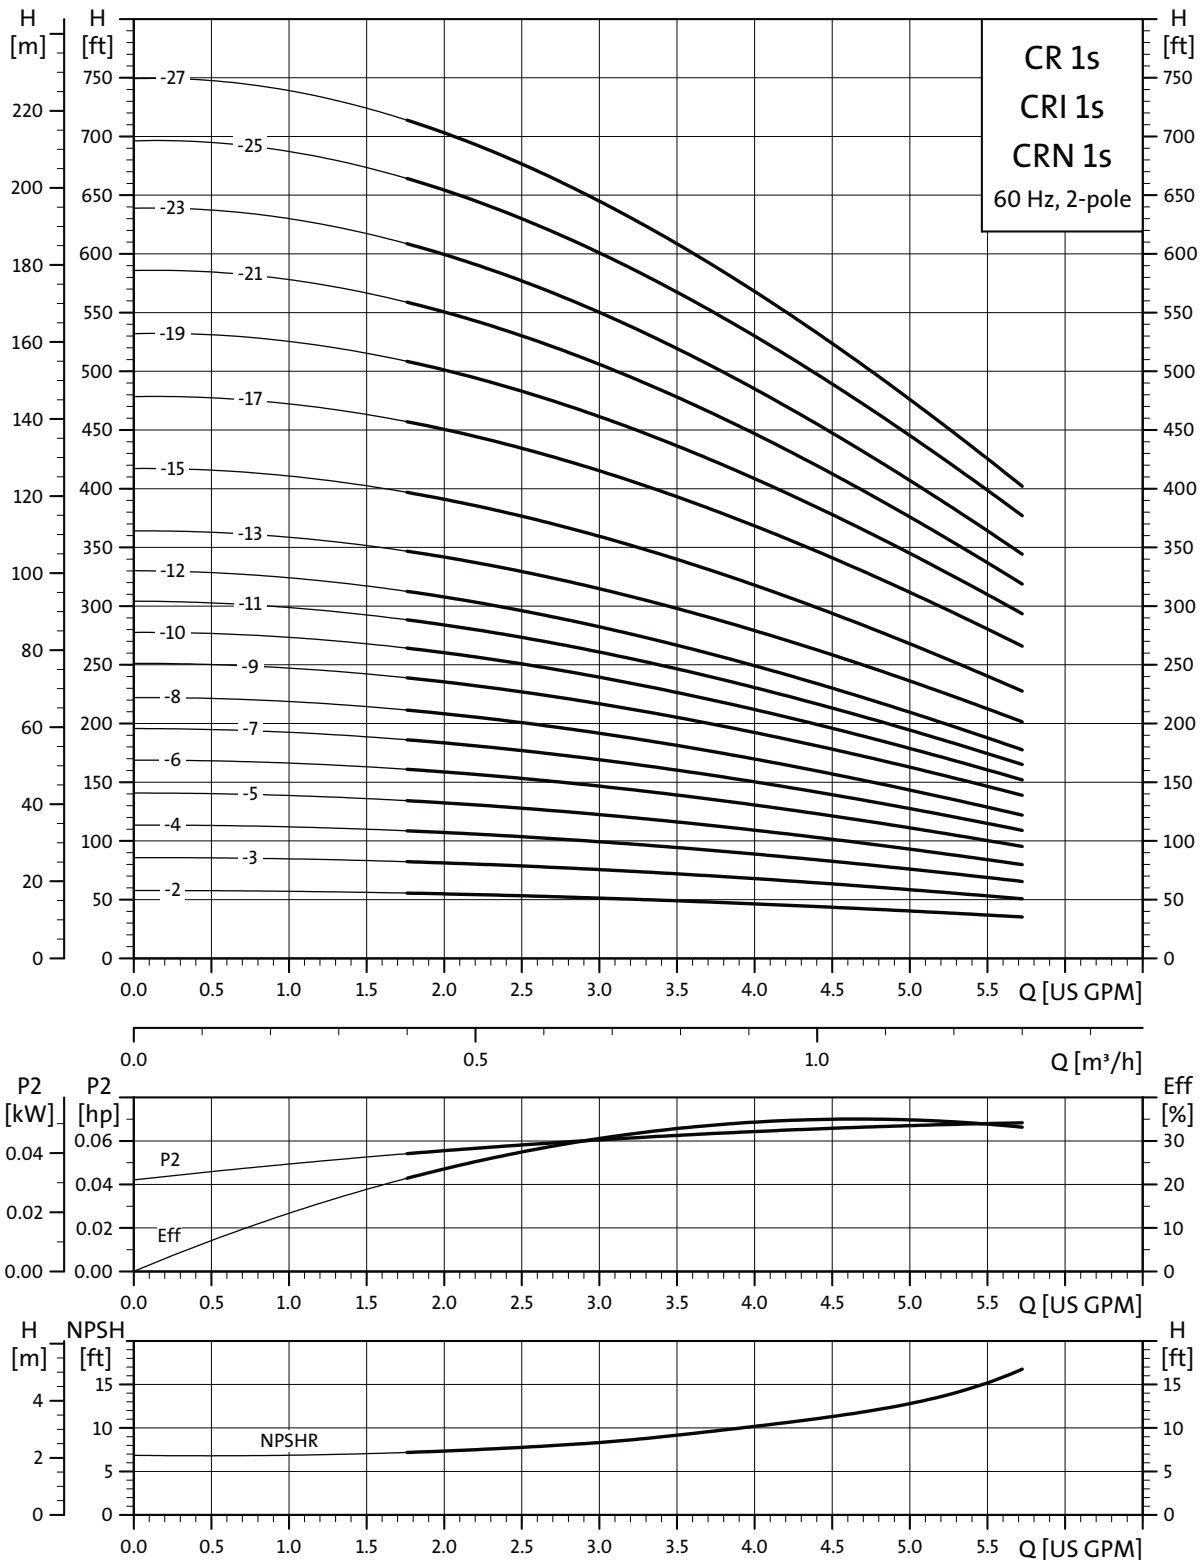

TM02 5741 1303

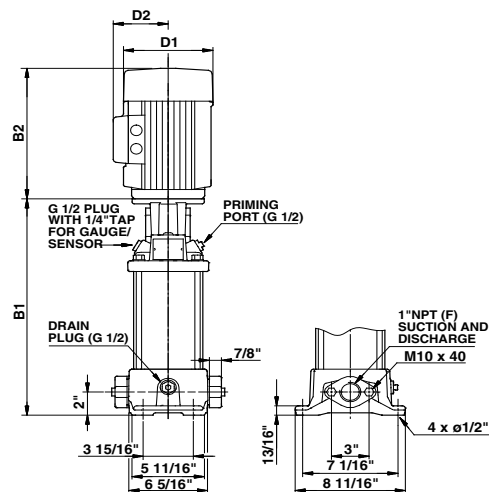

TM03 1450 2205

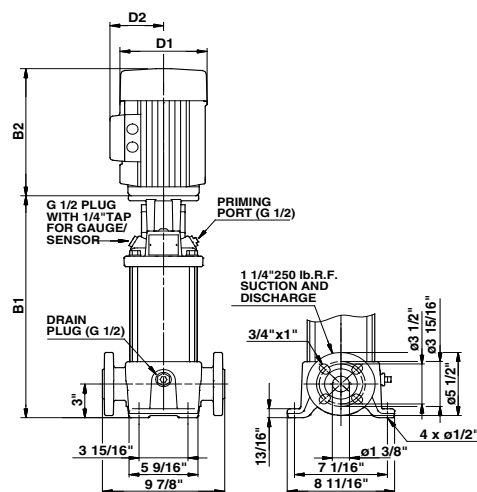


TM03 1451 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			
					D1	D2	B1+B2	
CR 1s-2	1/3	1	•	11.97	6.19	5.18	21.26	69
		3	•	11.97	5.55	4.57	19.41	67
CR 1s-3	1/3	1	•	11.97	6.19	5.18	21.26	69
		3	•	11.97	5.55	4.57	19.41	67
CR 1s-4	1/3	1	•	12.68	6.19	5.18	21.97	70
		3	•	12.68	5.55	4.57	20.12	68
CR 1s-5	1/3	1	•	13.39	6.19	5.18	22.68	71
		3	•	13.39	5.55	4.57	20.83	69
CR 1s-6	1/2	1	•	14.09	6.19	5.18	23.38	75
		3	•	14.09	5.55	4.57	21.53	70
CR 1s-7	1/2	1	•	14.80	6.19	5.18	24.09	76
		3	•	14.80	5.55	4.57	22.24	71
CR 1s-8	1/2	1	•	15.51	6.19	5.18	24.80	77
		3	•	15.51	5.55	4.57	22.95	72
CR 1s-9	3/4	1	•	16.22	6.19	5.18	26.13	82
		3	•	16.22	5.55	4.57	23.66	73
CR 1s-10	3/4	1	•	16.93	6.19	5.18	26.84	83
		3	•	16.93	5.55	4.57	24.37	74
CR 1s-11	3/4	1	•	17.64	6.19	5.18	27.55	84
		3	•	17.64	5.55	4.57	25.08	75
CR 1s-12	3/4	1	•	18.35	6.19	5.18	28.26	85
		3	•	18.35	5.55	4.57	25.79	76
CR 1s-13	1	1	•	19.06	7.19	5.73	30.25	101
		3	•	19.06	5.55	4.57	26.50	77
CR 1s-15	1	1	•	20.47	7.19	5.73	31.66	103
		3	•	20.47	5.55	4.57	27.91	78
CR 1s-17	1 1/2	1	•	21.89	7.19	5.73	33.57	107
		3	•	21.89	5.55	4.57	30.51	84
CR 1s-19	1 1/2	1	-	23.31	7.19	5.73	34.99	109
		3	-	23.31	5.55	4.57	31.93	86
CR 1s-21	1 1/2	1	-	24.72	7.19	5.73	36.40	111
		3	-	24.72	5.55	4.57	33.34	88
CR 1s-23	1 1/2	1	-	26.14	7.19	5.73	37.82	113
		3	-	26.14	5.55	4.57	34.76	90
CR 1s-25	2	1	-	27.56	7.19	5.73	40.12	126
		3	-	27.56	7.01	4.33	38.78	116
CR 1s-27	2	1	-	28.98	7.19	5.73	41.54	127
		3	-	28.98	7.01	4.33	40.20	118


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available

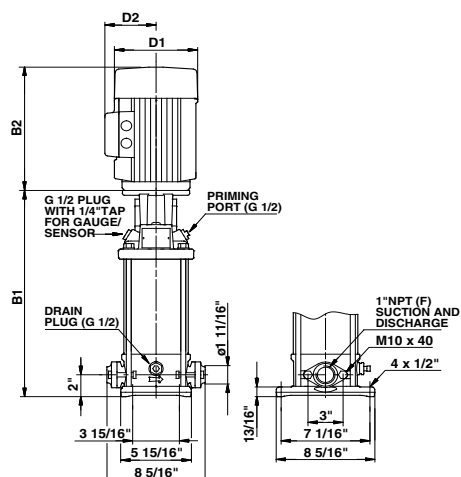

TM03 1452 2205

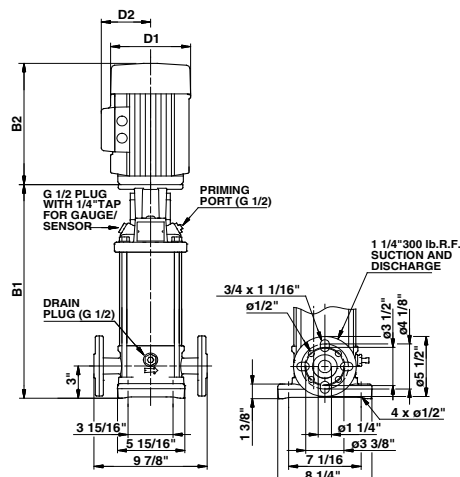


TM03 1453 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			
					D1	D2	B1+B2	
CRI 1s-2	1/3	1	•	12.09	6.19	5.18	21.38	64
		3	•	12.09	5.55	4.57	19.53	62
CRI 1s-3	1/3	1	•	12.09	6.19	5.18	21.38	64
		3	•	12.09	5.55	4.57	19.53	62
CRI 1s-4	1/3	1	•	12.80	6.19	5.18	22.09	65
		3	•	12.80	5.55	4.57	20.24	63
CRI 1s-5	1/3	1	•	13.50	6.19	5.18	22.79	66
		3	•	13.50	5.55	4.57	20.94	64
CRI 1s-6	1/2	1	•	14.21	6.19	5.18	23.50	70
		3	•	14.21	5.55	4.57	21.65	65
CRI 1s-7	1/2	1	•	14.92	6.19	5.18	24.21	71
		3	•	14.92	5.55	4.57	22.36	65
CRI 1s-8	1/2	1	•	15.63	6.19	5.18	24.92	72
		3	•	15.63	5.55	4.57	23.07	66
CRI 1s-9	3/4	1	•	16.34	6.19	5.18	26.25	77
		3	•	16.34	5.55	4.57	23.78	68
CRI 1s-10	3/4	1	•	17.05	6.19	5.18	26.96	78
		3	•	17.05	5.55	4.57	24.49	69
CRI 1s-11	3/4	1	•	17.76	6.19	5.18	27.67	79
		3	•	17.76	5.55	4.57	25.20	70
CRI 1s-12	3/4	1	•	18.46	6.19	5.18	28.37	79
		3	•	18.46	5.55	4.57	25.90	70
CRI 1s-13	1	1	•	19.17	7.19	5.73	30.36	96
		3	•	19.17	5.55	4.57	26.61	71
CRI 1s-15	1	1	•	20.59	7.19	5.73	31.78	97
		3	•	20.59	5.55	4.57	28.03	73
CRI 1s-17	1 1/2	1	•	22.01	7.19	5.73	33.69	102
		3	•	22.01	5.55	4.57	30.63	79
CRI 1s-19	1 1/2	1	-	23.43	7.19	5.73	35.11	104
		3	-	23.43	5.55	4.57	32.05	81
CRI 1s-21	1 1/2	1	-	24.84	7.19	5.73	36.52	106
		3	-	24.84	5.55	4.57	33.46	82
CRI 1s-23	1 1/2	1	-	26.26	7.19	5.73	37.94	107
		3	-	26.26	5.55	4.57	34.88	84
CRI 1s-25	2	1	-	27.68	7.19	5.73	40.24	120
		3	-	27.68	7.01	4.33	38.90	111
CRI 1s-27	2	1	-	29.09	7.19	5.73	41.65	122
		3	-	29.09	7.01	4.33	40.31	113


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.

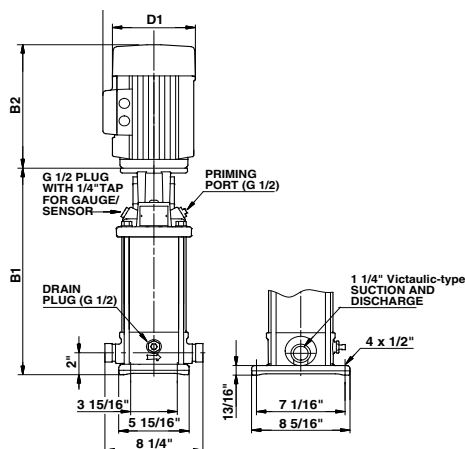

TM03 1454 2205

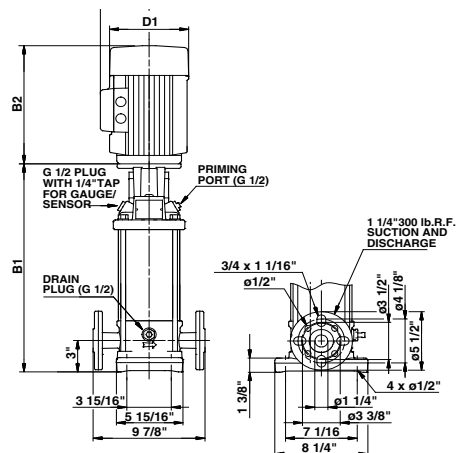

TM03 1453 2205


Pump type	P2 [hp]	Ph.	PJE*	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			
					D1	D2	B1+B2	
CRN 1s-2	1/3	1	•	12.09	6.19	5.18	21.38	63
		3	•	12.09	5.55	4.57	19.53	61
CRN 1s-3	1/3	1	•	12.09	6.19	5.18	21.38	64
		3	•	12.09	5.55	4.57	19.53	62
CRN 1s-4	1/3	1	•	12.80	6.19	5.18	22.09	65
		3	•	12.80	5.55	4.57	20.24	63
CRN 1s-5	1/3	1	•	13.50	6.19	5.18	22.79	66
		3	•	13.50	5.55	4.57	20.94	64
CRN 1s-6	1/2	1	•	14.21	6.19	5.18	23.50	70
		3	•	14.21	5.55	4.57	21.65	65
CRN 1s-7	1/2	1	•	14.92	6.19	5.18	24.21	71
		3	•	14.92	5.55	4.57	22.36	65
CRN 1s-8	1/2	1	•	15.63	6.19	5.18	24.92	72
		3	•	15.63	5.55	4.57	23.07	66
CRN 1s-9	3/4	1	•	16.34	6.19	5.18	26.25	77
		3	•	16.34	5.55	4.57	23.78	68
CRN 1s-10	3/4	1	•	17.05	6.19	5.18	26.96	78
		3	•	17.05	5.55	4.57	24.49	69
CRN 1s-11	3/4	1	•	17.76	6.19	5.18	27.67	78
		3	•	17.76	5.55	4.57	25.20	69
CRN 1s-12	3/4	1	•	18.46	6.19	5.18	28.37	79
		3	•	18.46	5.55	4.57	25.90	70
CRN 1s-13	1	1	•	19.17	7.19	5.73	30.36	96
		3	•	19.17	5.55	4.57	26.61	71
CRN 1s-15	1	1	•	20.59	7.19	5.73	31.78	97
		3	•	20.59	5.55	4.57	28.03	73
CRN 1s-17	1 1/2	1	•	22.01	7.19	5.73	33.69	102
		3	•	22.01	5.55	4.57	30.63	79
CRN 1s-19	1 1/2	1	•	23.43	7.19	5.73	35.11	104
		3	•	23.43	5.55	4.57	32.05	81
CRN 1s-21	1 1/2	1	•	24.84	7.19	5.73	36.52	105
		3	•	24.84	5.55	4.57	33.46	82
CRN 1s-23	1 1/2	1	•	26.26	7.19	5.73	37.94	107
		3	•	26.26	5.55	4.57	34.88	84
CRN 1s-25	2	1	•	27.68	7.19	5.73	40.24	120
		3	•	27.68	7.01	4.33	38.90	111
CRN 1s-27	2	1	•	29.09	7.19	5.73	41.65	122
		3	•	29.09	7.01	4.33	40.31	112

All dimensions in inches unless otherwise noted.


*PJE flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.


CR(E), CRI(E), CRN(E) 1

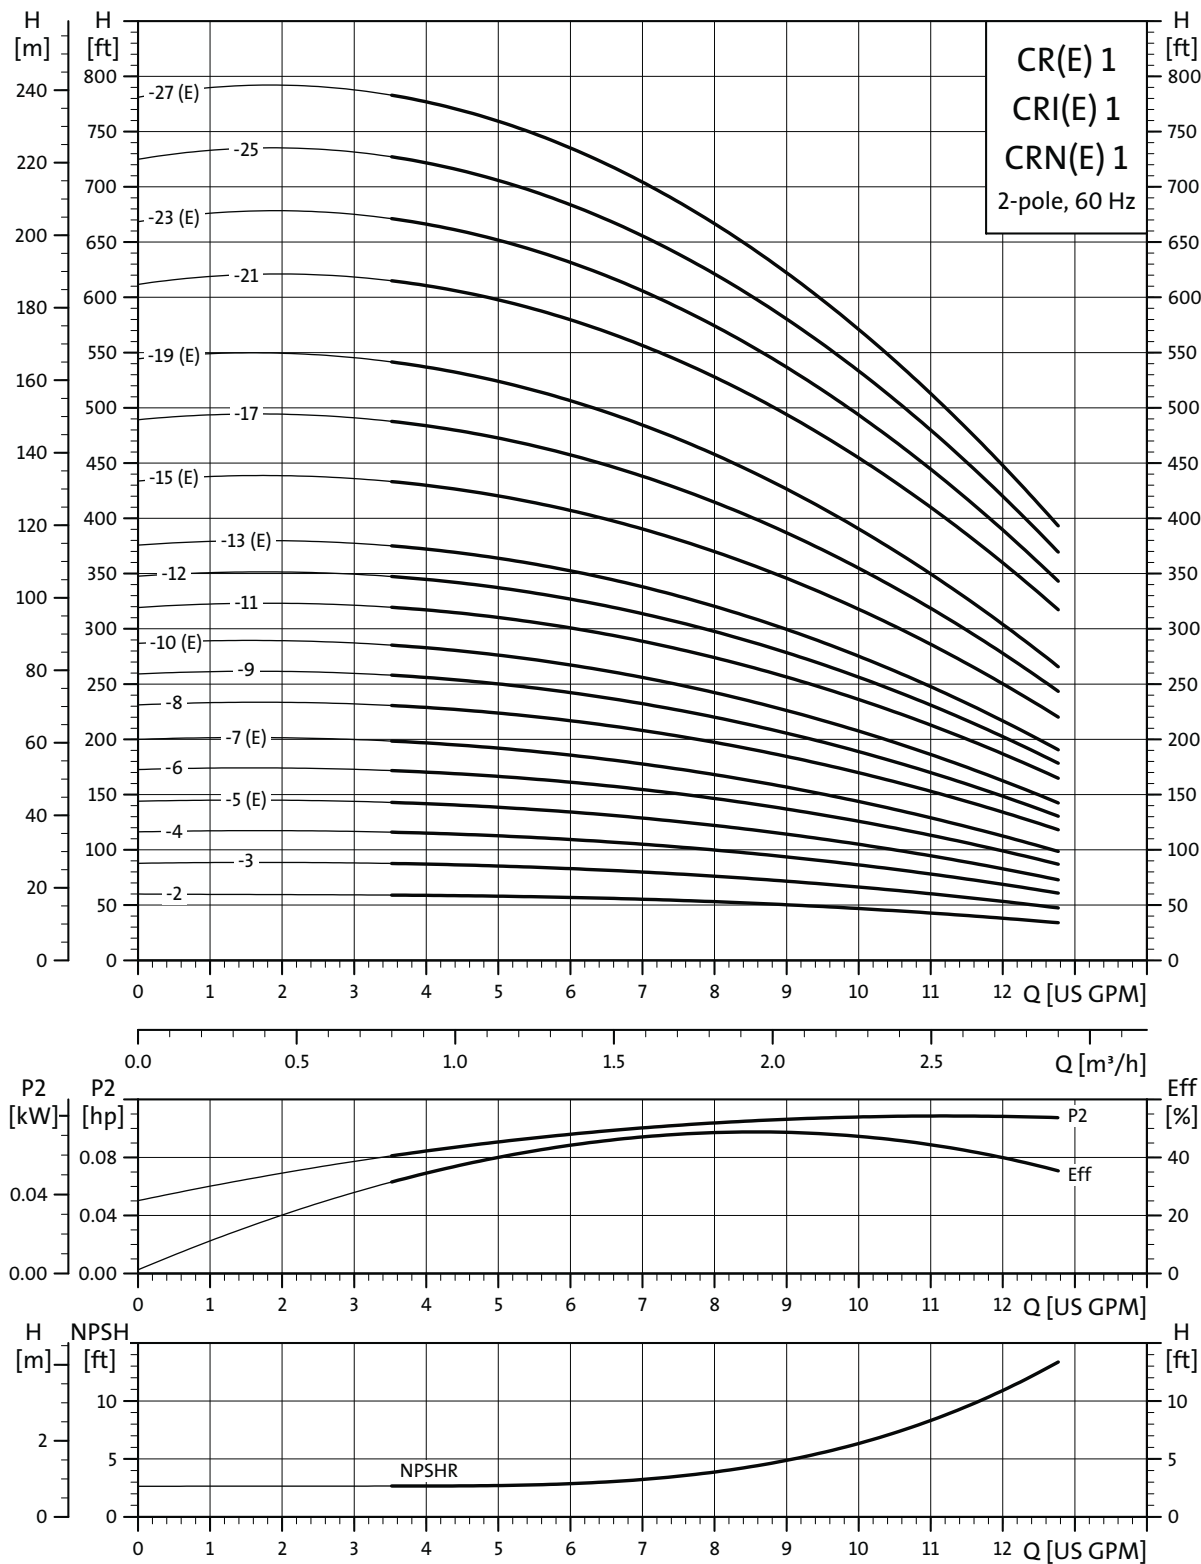

TM02 4083 1303

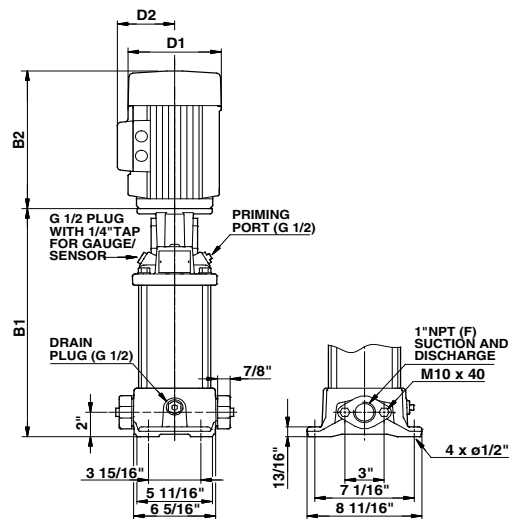

TM03 1450 2205

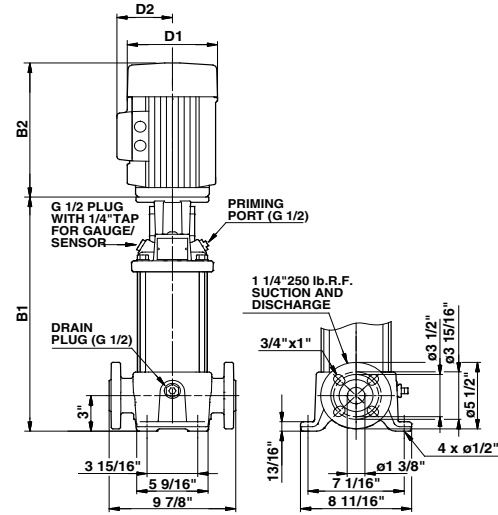


TM03 1451 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC				MLE				
					D1	D2	B1+B2		D1	D2	B1+B2		
CR 1-2	1/3	1 3	• •	11.97 11.97	6.19 5.55	5.18 4.57	21.26 19.41	69 67	- -	- -	- -	- -	
CR 1-3	1/3	1 3	• •	11.97 11.97	6.19 5.55	5.18 4.57	21.26 19.41	69 67	- -	- -	- -	- -	
CR 1-4	1/2	1 3	• •	12.68 12.68	6.19 5.55	5.18 4.57	21.97 20.12	73 68	5.55 -	5.51 -	20.10 -	71 -	
CR(E) 1-5	1/2	1 3	• •	13.39 13.39	6.19 5.55	5.18 4.57	22.68 20.83	75 69	- -	- -	- -	- -	
CR 1-6	3/4	1 3	• •	14.09 14.09	6.19 5.55	5.18 4.57	24.00 21.53	80 71	5.55 -	5.51 -	21.51 -	74 -	
CR(E) 1-7	3/4	1 3	• •	14.80 14.80	6.19 5.55	5.18 4.57	24.71 22.24	81 72	- -	- -	- -	- -	
CR 1-8	1	1 3	• •	15.51 15.51	7.19 5.55	5.73 4.57	26.70 22.95	93 72	- -	- -	- -	- -	
CR 1-9	1	1 3	• •	16.22 16.22	7.19 5.55	5.73 4.57	27.41 23.66	94 74	5.55 7.01	5.51 6.57	25.20 29.02	79 96	
CR(E) 1-10	1 1/2	1 3	• •	16.93 16.93	7.19 5.55	5.73 4.57	28.61 25.55	95 74	- 7.01	- 6.57	- 29.73	- 99	
CR 1-11	1 1/2	1 3	• •	17.64 17.64	7.19 5.55	5.73 4.57	29.32 26.26	102 76	- -	- -	- -	- -	
CR 1-12	1 1/2	1 3	• •	18.35 18.35	7.19 5.55	5.73 4.57	30.03 26.97	103 77	- -	- -	- -	- -	
CR(E) 1-13	1 1/2	1 3	• •	19.06 19.06	7.19 5.55	5.73 4.57	30.74 27.68	104 78	5.55 7.01	5.51 6.57	28.04 31.86	86 102	
CR(E) 1-15	2	1 3	• •	20.47 20.47	7.19 7.01	5.73 4.33	33.03 31.69	114 104	- 7.01	- 6.57	- 33.27	- 117	
CR 1-17	2	1 3	• •	21.89 21.89	7.19 7.01	5.73 4.33	34.45 33.11	116 106	- 7.01	- 6.57	- 34.69	- 119	
CR(E) 1-19	3	1 3	- -	24.41 24.41	8.60 7.01	6.87 4.33	39.06 37.64	155 123	- -	- -	- -	- -	
CR 1-21	3	1 3	- -	25.83 25.83	8.60 7.01	6.87 4.33	40.48 39.06	158 125	- -	- -	- -	- -	
CR(E) 1-23	3	1 3	- -	27.24 27.24	8.60 7.01	6.87 4.33	41.89 40.47	159 130	- 7.01	- 6.57	- 40.55	- 139	
CR 1-25	3	1 3	- -	28.66 28.66	8.60 7.01	6.87 4.33	43.31 41.89	161 132	- -	- -	- -	- -	
CR(E) 1-27	3	1 3	- -	30.08 30.08	8.60 7.01	6.87 4.33	44.73 43.31	163 134	- 7.01	- 6.57	- 43.39	- 142	


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.

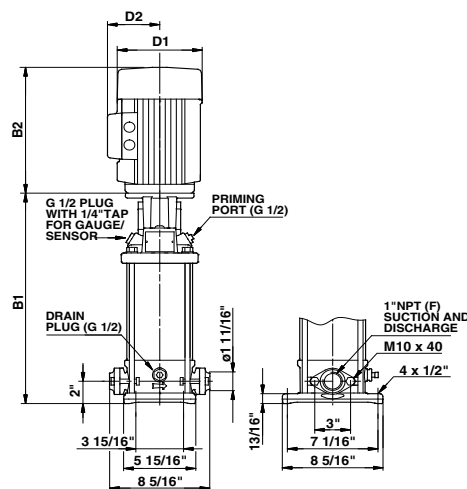

TM03 1450 2205

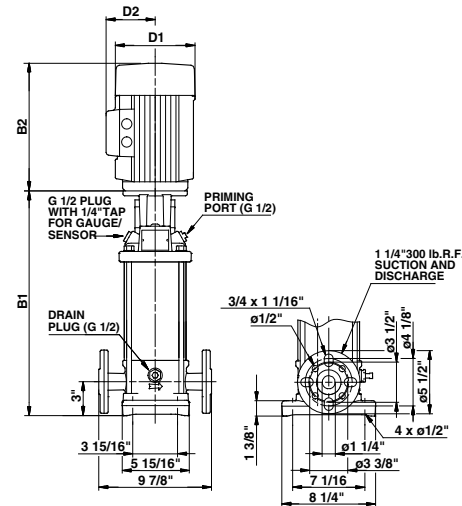


TM03 1451 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC				MLE				
					D1	D2	B1+B2		D1	D2	B1+B2		
CRI 1-2	1/3	1	•	12.09	6.19	5.18	21.38	64	-	-	-	-	
		3	•	12.09	5.55	4.57	19.53	62	-	-	-	-	
CRI 1-3	1/3	1	•	12.09	6.19	5.18	21.38	64	-	-	-	-	
		3	•	12.09	5.55	4.57	19.53	62	-	-	-	-	
CRI 1-4	1/2	1	•	12.8	6.19	5.18	22.09	68	5.55	5.51	20.22	65	
		3	•	12.8	5.55	4.57	20.24	63	-	-	-	-	
CRI(E) 1-5	1/2	1	•	13.5	6.19	5.18	22.79	69	-	-	-	-	
		3	•	13.5	5.55	4.57	20.94	64	-	-	-	-	
CRI 1-6	3/4	1	•	14.21	6.19	5.18	24.12	74	5.55	5.51	21.63	68	
		3	•	14.21	5.55	4.57	21.65	65	-	-	-	-	
CRI(E) 1-7	3/4	1	•	14.92	6.19	5.18	24.83	75	-	-	-	-	
		3	•	14.92	5.55	4.57	22.36	66	-	-	-	-	
CRI 1-8	1	1	•	15.63	7.19	5.73	26.82	88	-	-	-	-	
		3	•	15.63	5.55	4.57	23.07	67	-	-	-	-	
CRI 1-9	1	1	•	16.34	7.19	5.73	27.53	89	5.55	5.51	25.32	73	
		3	•	16.34	5.55	4.57	23.78	68	7.01	6.57	29.14	90	
CRI(E) 1-10	1 1/2	1	•	17.05	7.19	5.73	28.73	90	-	-	-	-	
		3	•	17.05	5.55	4.57	25.67	69	7.01	6.57	29.85	92	
CRI 1-11	1 1/2	1	•	17.76	7.19	5.73	29.44	97	-	-	-	-	
		3	•	17.76	5.55	4.57	26.38	70	-	-	-	-	
CRI 1-12	1 1/2	1	•	18.46	7.19	5.73	30.14	98	-	-	-	-	
		3	•	18.46	5.55	4.57	27.08	71	-	-	-	-	
CRI(E) 1-13	1 1/2	1	•	19.17	7.19	5.73	30.85	99	5.55	5.51	28.15	80	
		3	•	19.17	5.55	4.57	27.79	72	7.01	6.57	31.97	97	
CRI(E) 1-15	2	1	•	20.59	7.19	5.73	33.15	109	-	-	-	-	
		3	•	20.59	7.01	4.33	31.81	99	7.01	6.57	33.39	112	
CRI 1-17	2	1	•	22.01	7.19	5.73	34.57	110	-	-	-	-	
		3	•	22.01	7.01	4.33	33.23	101	7.01	6.57	34.81	113	
CRI(E) 1-19	3	1	-	24.53	8.60	6.87	39.18	148	-	-	-	-	
		3	-	24.53	7.01	4.33	37.76	116	-	-	-	-	
CRI 1-21	3	1	-	25.94	8.60	6.87	40.59	150	-	-	-	-	
		3	-	25.94	7.01	4.33	39.17	118	-	-	-	-	
CRI(E) 1-23	3	1	-	27.36	8.60	6.87	42.01	152	-	-	-	-	
		3	-	27.36	7.01	4.33	40.59	123	7.01	6.57	40.67	131	
CRI 1-25	3	1	-	28.78	8.60	6.87	43.43	154	-	-	-	-	
		3	-	28.78	7.01	4.33	42.01	125	-	-	-	-	
CRI(E) 1-27	3	1	-	30.20	8.60	6.87	44.85	156	-	-	-	-	
		3	-	30.20	7.01	4.33	43.43	127	7.01	6.57	43.51	135	


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.

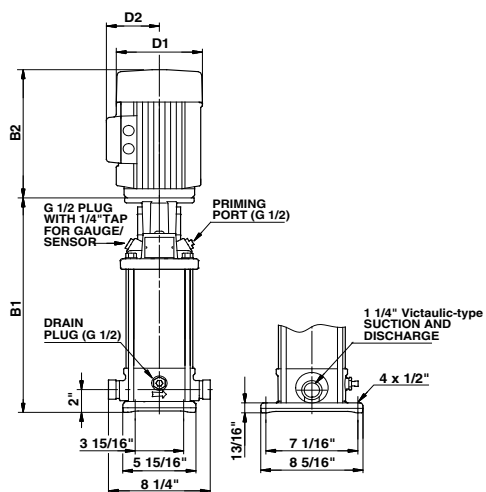

TM03 1454 2205

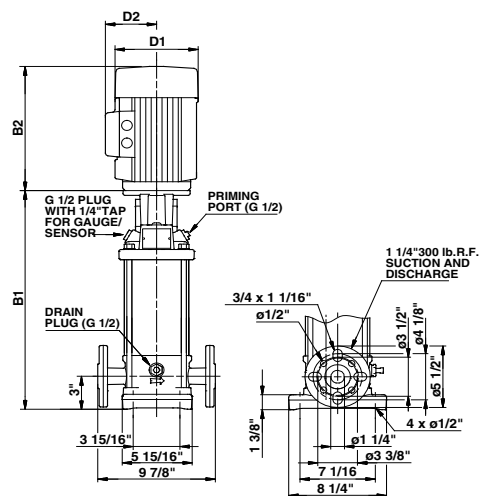

TM03 1453 2205


Pump type	P2 [hp]	Ph.	PJE*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC				MLE	D1	D2	B1+B2	
					D1	D2	B1+B2						
CRN 1-2	1/3	1	•	12.09	6.19	5.18	21.38	64	-	-	-	-	
		3	•	12.09	5.55	4.57	19.53	62	-	-	-	-	
CRN 1-3	1/3	1	•	12.09	6.19	5.18	21.38	64	-	-	-	-	
		3	•	12.09	5.55	4.57	19.53	62	-	-	-	-	
CRN 1-4	1/2	1	•	12.80	6.19	5.18	22.09	68	5.55	5.51	20.22	65	
		3	•	12.80	5.55	4.57	20.24	63	-	-	-	-	
CRN(E) 1-5	1/2	1	•	13.50	6.19	5.18	22.79	69	-	-	-	-	
		3	•	13.50	5.55	4.57	20.94	64	-	-	-	-	
CRN 1-6	3/4	1	•	14.21	6.19	5.18	24.12	74	5.55	5.51	21.63	68	
		3	•	14.21	5.55	4.57	21.65	65	-	-	-	-	
CRN(E) 1-7	3/4	1	•	14.92	6.19	5.18	24.83	75	-	-	-	-	
		3	•	14.92	5.55	4.57	22.36	66	-	-	-	-	
CRN 1-8	1	1	•	15.63	7.19	5.73	26.82	88	-	-	-	-	
		3	•	15.63	5.55	4.57	23.07	67	-	-	-	-	
CRN 1-9	1	1	•	16.34	7.19	5.73	27.53	89	5.55	5.51	25.32	73	
		3	•	16.34	5.55	4.57	23.78	68	7.01	6.57	29.14	90	
CRN(E) 1-10	1 1/2	1	•	17.05	7.19	5.73	28.73	90	-	-	-	-	
		3	•	17.05	5.55	4.57	25.67	69	7.01	6.57	29.85	92	
CRN 1-11	1 1/2	1	•	17.76	7.19	5.73	29.44	97	-	-	-	-	
		3	•	17.76	5.55	4.57	26.38	70	-	-	-	-	
CRN 1-12	1 1/2	1	•	18.46	7.19	5.73	30.14	98	-	-	-	-	
		3	•	18.46	5.55	4.57	27.08	71	-	-	-	-	
CRN(E) 1-13	1 1/2	1	•	19.17	7.19	5.73	30.85	99	5.55	5.51	28.15	80	
		3	•	19.17	5.55	4.57	27.79	72	7.01	6.57	31.97	97	
CRN(E) 1-15	2	1	•	20.59	7.19	5.73	33.15	108	-	-	-	-	
		3	•	20.59	7.01	4.33	31.81	99	7.01	6.57	33.39	112	
CRN 1-17	2	1	•	22.01	7.19	5.73	34.57	110	-	-	-	-	
		3	•	22.01	7.01	4.33	33.23	101	7.01	6.57	34.81	113	
CRN(E) 1-19	3	1	•	23.43	8.60	6.87	38.08	148	-	-	-	-	
		3	•	23.43	7.01	4.33	36.66	116	-	-	-	-	
CRN 1-21	3	1	•	25.94	8.60	6.87	40.59	150	-	-	-	-	
		3	•	25.94	7.01	4.33	39.17	118	-	-	-	-	
CRN(E) 1-23	3	1	•	27.36	8.60	6.87	42.01	152	-	-	-	-	
		3	•	27.36	7.01	4.33	40.59	123	7.01	6.57	40.67	131	
CRN 1-25	3	1	•	28.78	8.60	6.87	43.43	154	-	-	-	-	
		3	•	28.78	7.01	4.33	42.01	124	-	-	-	-	
CRN(E) 1-27	3	1	•	30.20	8.60	6.87	44.85	155	-	-	-	-	
		3	•	30.20	7.01	4.33	43.43	126	7.01	6.57	43.51	135	

All dimensions in inches unless otherwise noted.


*PJE flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available


CR(E), CRI(E), CRN(E) 3

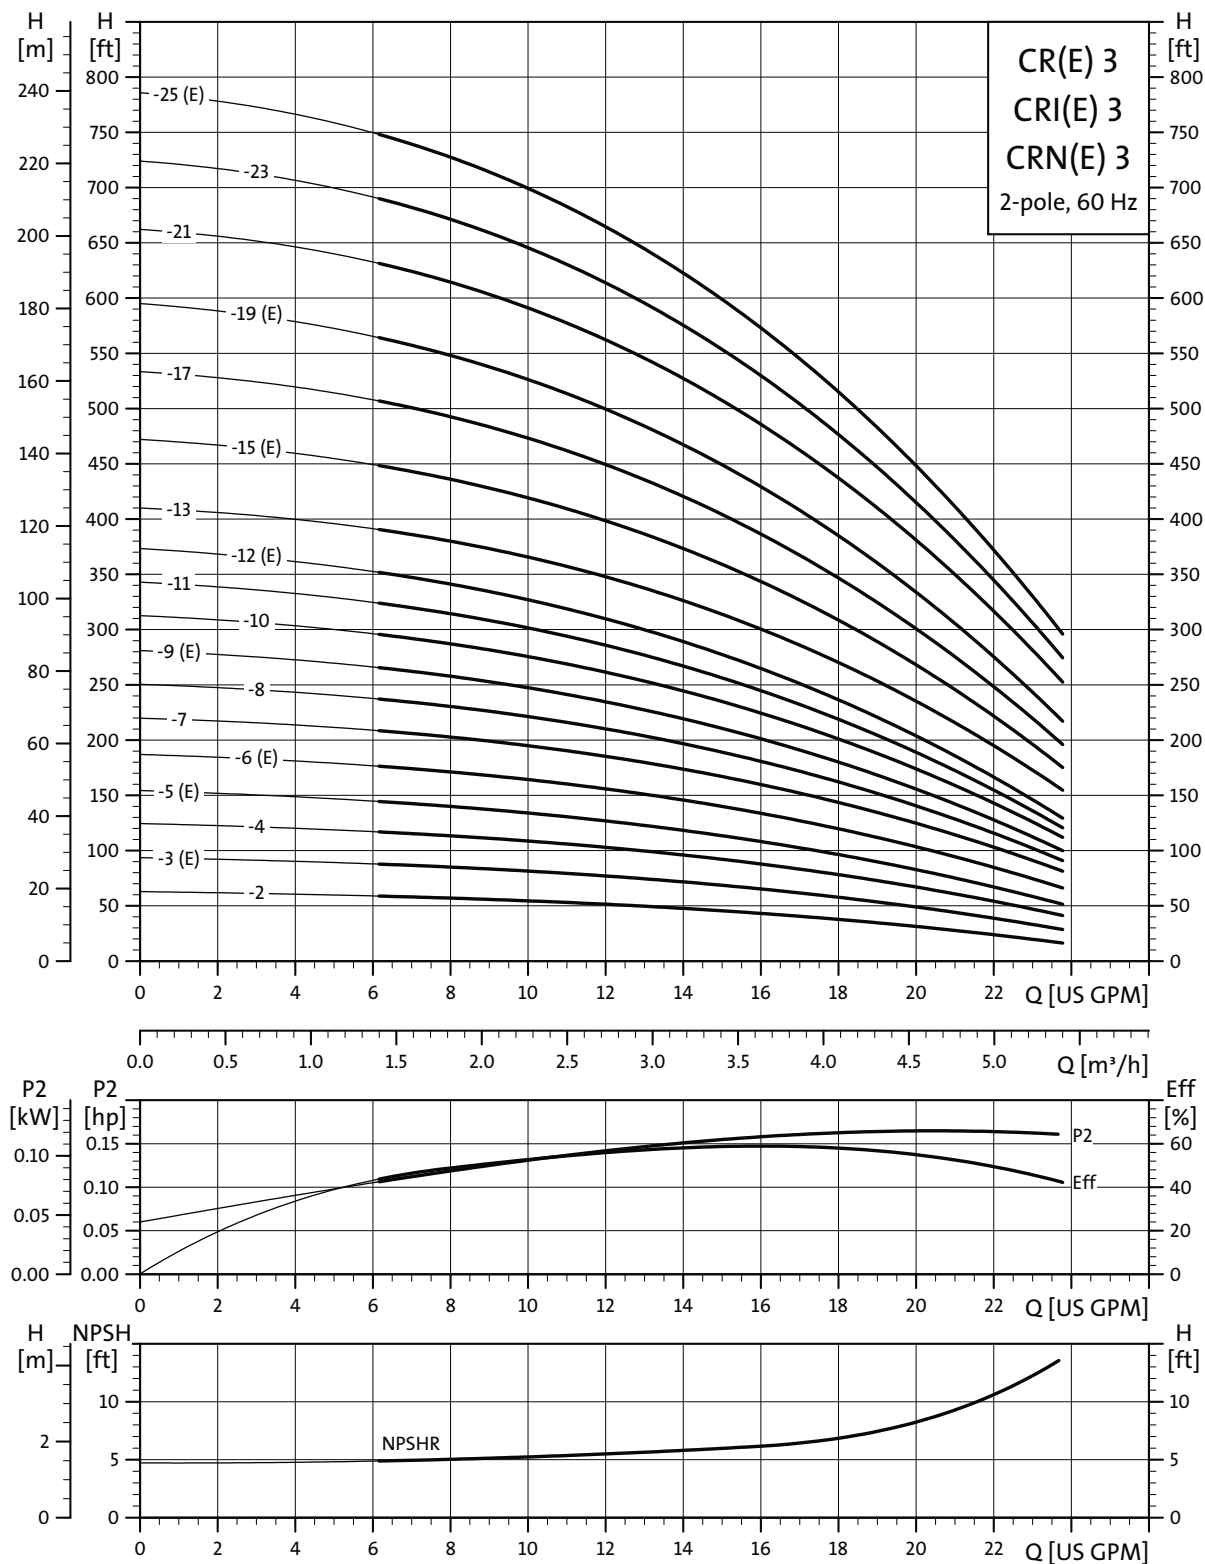

TM02 4084 1303

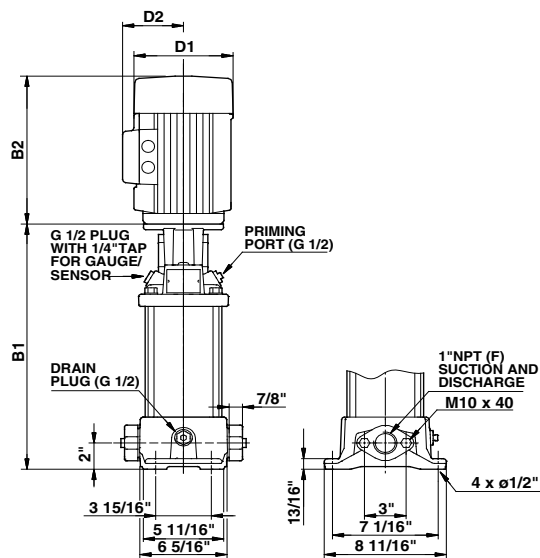

TM03 1450 2205

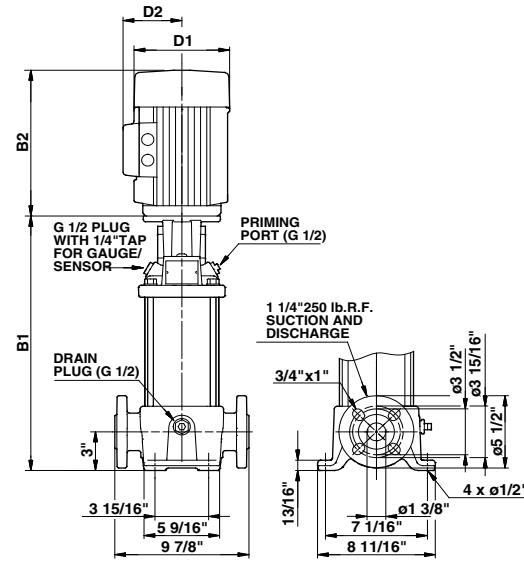


TM03 1451 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]			Ship Wt. [lbs.]
				B1	TEFC				MLE			
					D1	D2	B1+B2		D1	D2	B1+B2	
CR 3-2	1/3	1 3	• •	11.97 11.97	6.19 5.55	5.18 4.57	21.26 19.41	69 67	5.55 -	5.51 -	19.39 -	69 -
CR(E) 3-3	1/2	1 3	• •	11.97 11.97	6.19 5.55	5.18 4.57	21.26 19.41	73 67	- -	- -	- -	- -
CR 3-4	3/4	1 3	• •	12.68 12.68	6.19 5.55	5.18 4.57	22.59 20.12	78 69	5.55 -	5.51 -	20.10 -	72 -
CR(E) 3-5	3/4	1 3	• •	13.39 13.39	6.19 5.55	5.18 4.57	23.30 20.83	79 70	5.55 -	5.51 -	22.37 -	73 -
CR(E) 3-6	1	1 3	• •	14.09 14.09	7.19 5.55	5.73 4.57	25.28 21.53	91 71	- 7.01	- 6.57	- 26.89	- 90
CR 3-7	1 1/2	1 3	• •	14.80 14.80	7.19 5.55	5.73 4.57	26.48 23.42	95 72	- -	- -	- -	- -
CR 3-8	1 1/2	1 3	• •	15.51 15.51	7.19 5.55	5.73 4.57	27.19 24.13	96 73	5.55 -	5.51 -	24.49 -	81 -
CR(E) 3-9	1 1/2	1 3	• •	16.22 16.22	7.19 5.55	5.73 4.57	27.90 24.84	97 74	- 7.01	- 6.57	- 29.02	- 99
CR 3-10	2	1 3	• •	16.93 16.93	7.19 7.01	5.73 4.33	29.49 28.15	109 96	- -	- -	- -	- -
CR 3-11	2	1 3	• •	17.64 17.64	7.19 7.01	5.73 4.33	30.20 28.86	110 101	- -	- -	- -	- -
CR(E) 3-12	2	1 3	• •	18.35 18.35	7.19 7.01	5.73 4.33	30.91 29.57	111 102	- 7.01	- 6.57	- 31.15	- 115
CR 3-13	3	1 3	• •	20.16 20.16	8.60 7.01	6.87 4.33	34.81 33.39	147 118	- -	- -	- -	- -
CR(E) 3-15	3	1 3	• •	21.57 21.57	8.60 7.01	6.87 4.33	36.22 34.80	149 120	- 7.01	- 6.57	- 34.88	- 128
CR 3-17	3	1 3	• •	22.99 22.99	8.60 7.01	6.87 4.33	37.64 36.22	150 121	- 7.01	- 6.57	- 36.30	- 130
CR(E) 3-19	5	1 3	- -	24.41 24.41	10.62 8.66	7.46 5.28	39.93 39.92	179 175	- -	- -	- -	- -
CR 3-21	5	1 3	- -	25.83 25.83	10.62 8.66	7.46 5.28	41.35 41.34	181 177	- -	- -	- -	- -
CR 3-23	5	1 3	- -	27.24 27.24	10.62 8.66	7.46 5.28	42.76 42.75	182 179	- -	- -	- -	- -
CR(E) 3-25	5	1 3	- -	28.66 28.66	10.62 8.66	7.46 5.28	44.18 44.17	184 181	- 8.66	- 7.40	- 44.17	- 172


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.

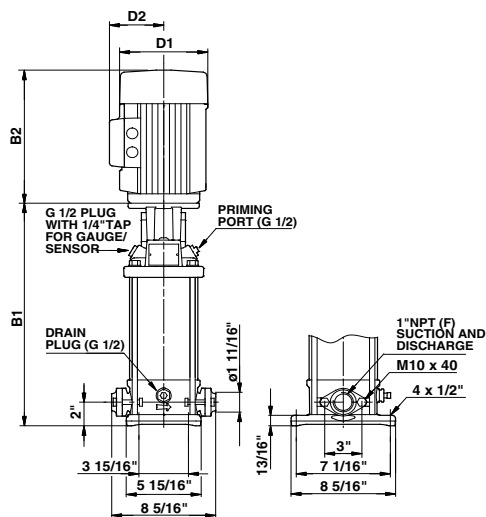

TM03 1452 2205

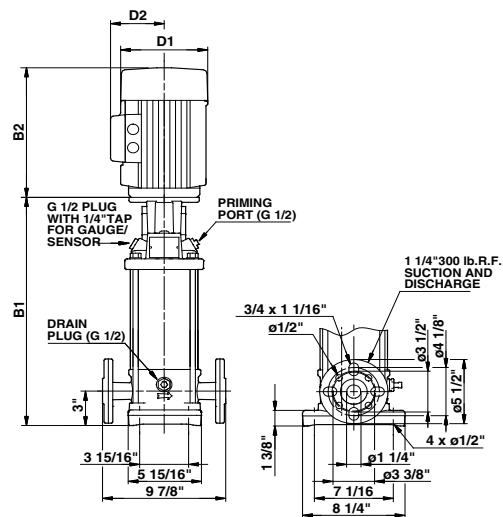


TM03 1453 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]			Ship Wt. [lbs.]
				B1	TEFC				D1	D2	B1+B2	
					D1	D2	B1+B2					
CRI 3-2	1/3	1 3	• •	12.09 12.09	6.19 5.55	5.18 4.57	21.38 19.53	64 62	5.55 -	5.51 -	19.51 -	63 -
CRI(E) 3-3	1/2	1 3	• •	12.09 12.09	6.19 5.55	5.18 4.57	21.38 19.53	67 62	- -	- -	- -	- -
CRI 3-4	3/4	1 3	• •	12.80 12.80	6.19 5.55	5.18 4.57	22.71 20.24	73 63	5.55 -	5.51 -	20.22 -	67 -
CRI(E) 3-5	3/4	1 3	• •	13.50 13.50	6.19 5.55	5.18 4.57	23.41 20.94	74 65	5.55 -	5.51 -	22.48 -	68 -
CRI(E) 3-6	1	1 3	• •	14.21 14.21	7.19 5.55	5.73 4.57	25.40 21.65	86 65	- 7.01	- 6.57	- 27.01	- 85
CRI 3-7	1 1/2	1 3	• •	14.92 14.92	7.19 5.55	5.73 4.57	26.60 23.54	90 67	- -	- -	- -	- -
CRI 3-8	1 1/2	1 3	• •	15.63 15.63	7.19 5.55	5.73 4.57	27.31 24.25	91 68	5.55 -	5.51 -	24.61 -	76 -
CRI(E) 3-9	1 1/2	1 3	• •	16.34 16.34	7.19 5.55	5.73 4.57	28.02 24.96	92 69	- 7.01	- 6.57	- 29.14	- 93
CRI 3-10	2	1 3	• •	17.05 17.05	7.19 7.01	5.73 4.33	29.61 28.27	104 91	- -	- -	- -	- -
CRI 3-11	2	1 3	• •	17.76 17.76	7.19 7.01	5.73 4.33	30.32 28.98	105 95	- -	- -	- -	- -
CRI(E) 3-12	2	1 3	• •	18.46 18.46	7.19 7.01	5.73 4.33	31.02 29.68	106 96	- 7.01	- 6.57	- 31.26	- 109
CRI 3-13	3	1 3	• •	20.28 20.28	8.60 7.01	6.87 4.33	34.93 33.51	140 111	- -	- -	- -	- -
CRI(E) 3-15	3	1 3	• •	21.69 21.69	8.60 7.01	6.87 4.33	36.34 34.92	142 113	- 7.01	- 6.57	- 35.00	- -
CRI 3-17	3	1 3	• •	23.11 23.11	8.60 7.01	6.87 4.33	37.76 36.34	143 114	- 7.01	- 6.57	- 36.42	- 121
CRI(E) 3-19	5	1 3	- -	24.53 24.53	10.62 8.66	7.46 5.28	40.05 40.04	172 168	- -	- -	- -	- -
CRI 3-21	5	1 3	- -	25.94 25.94	10.62 8.66	7.46 5.28	41.46 41.45	174 170	- -	- -	- -	- -
CRI 3-23	5	1 3	- -	27.36 27.36	10.62 8.66	7.46 5.28	42.88 42.87	175 172	- -	- -	- -	- -
CRI(E) 3-25	5	1 3	- -	28.78 28.78	10.62 8.66	7.46 5.28	44.30 44.29	177 174	- 8.66	- 7.40	- 44.29	- 165


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.

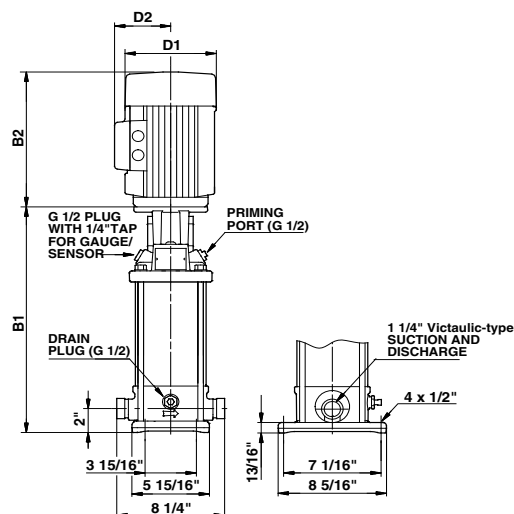

TM03 1454 2205

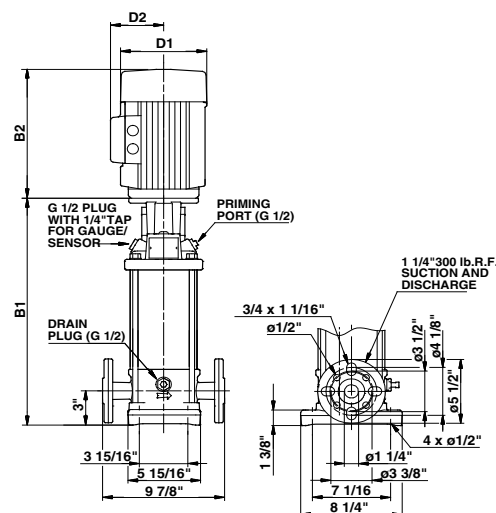

TM03 1453 2205


Pump type	P2 [hp]	Ph.	PJE*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC				MLE				
					D1	D2	B1+B2		D1	D2	B1+B2		
CRN 3-2	1/3	1 3	• •	12.09 12.09	6.19 5.55	5.18 4.57	21.38 19.53	64 62	5.55 -	5.51 -	19.51 -	63 -	
CRN(E) 3-3	1/2	1 3	• •	12.09 12.09	6.19 5.55	5.18 4.57	21.38 19.53	67 62	- -	- -	- -	- -	
CRN 3-4	3/4	1 3	• •	12.80 12.80	6.19 5.55	5.18 4.57	22.71 20.24	73 63	5.55 -	5.51 -	20.22 -	67 -	
CRN(E) 3-5	3/4	1 3	• •	13.50 13.50	6.19 5.55	5.18 4.57	23.41 20.94	73 64	5.55 -	5.51 -	22.48 -	68 -	
CRN(E) 3-6	1	1 3	• •	14.21 14.21	7.19 5.55	5.73 4.57	25.40 21.65	86 65	- 7.01	- 6.57	- 27.01	- 85	
CRN 3-7	1 1/2	1 3	• •	14.92 14.92	7.19 5.55	5.73 4.57	26.60 23.54	90 67	- -	- -	- -	- -	
CRN 3-8	1 1/2	1 3	• •	15.63 15.63	7.19 5.55	5.73 4.57	27.31 24.25	91 68	5.55 -	5.51 -	24.61 -	76 -	
CRN(E) 3-9	1 1/2	1 3	• •	16.34 16.34	7.19 5.55	5.73 4.57	28.02 24.96	92 69	- 7.01	- 6.57	- 29.14	- 93	
CRN 3-10	2	1 3	• •	17.05 17.05	7.19 7.01	5.73 4.33	29.61 28.27	104 91	- -	- -	- -	- -	
CRN 3-11	2	1 3	• •	17.76 17.76	7.19 7.01	5.73 4.33	30.32 28.98	105 95	- -	- -	- -	- -	
CRN(E) 3-12	2	1 3	• •	18.46 18.46	7.19 7.01	5.73 4.33	31.02 29.68	106 96	- 7.01	- 6.57	- 31.26	- 109	
CRN 3-13	3	1 3	• •	20.28 20.28	8.60 7.01	6.87 4.33	34.93 33.51	139 110	- -	- -	- -	- -	
CRN(E) 3-15	3	1 3	• •	21.69 21.69	8.60 7.01	6.87 4.33	36.34 34.92	142 112	- 7.01	- 6.57	- 35.00	- -	
CRN 3-17	3	1 3	• •	23.11 23.11	8.60 7.01	6.87 4.33	37.76 36.34	143 114	- 7.01	- 6.57	- 36.42	- 121	
CRN(E) 3-19	5	1 3	• •	24.53 24.53	10.62 8.66	7.46 5.28	40.05 40.04	172 168	- -	- -	- -	- -	
CRN 3-21	5	1 3	• •	25.94 25.94	10.62 8.66	7.46 5.28	41.46 41.45	174 170	- -	- -	- -	- -	
CRN 3-23	5	1 3	• •	27.36 27.36	10.62 8.66	7.46 5.28	42.88 42.87	175 171	- -	- -	- -	- -	
CRN(E) 3-25	5	1 3	• •	28.78 28.78	10.62 8.66	7.46 5.28	44.30 44.29	177 173	- 8.66	- 7.40	- 44.29	- 165	

All dimensions in inches unless otherwise noted.


*PJE flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

• Available.


CR(E), CRI(E), CRN(E) 5

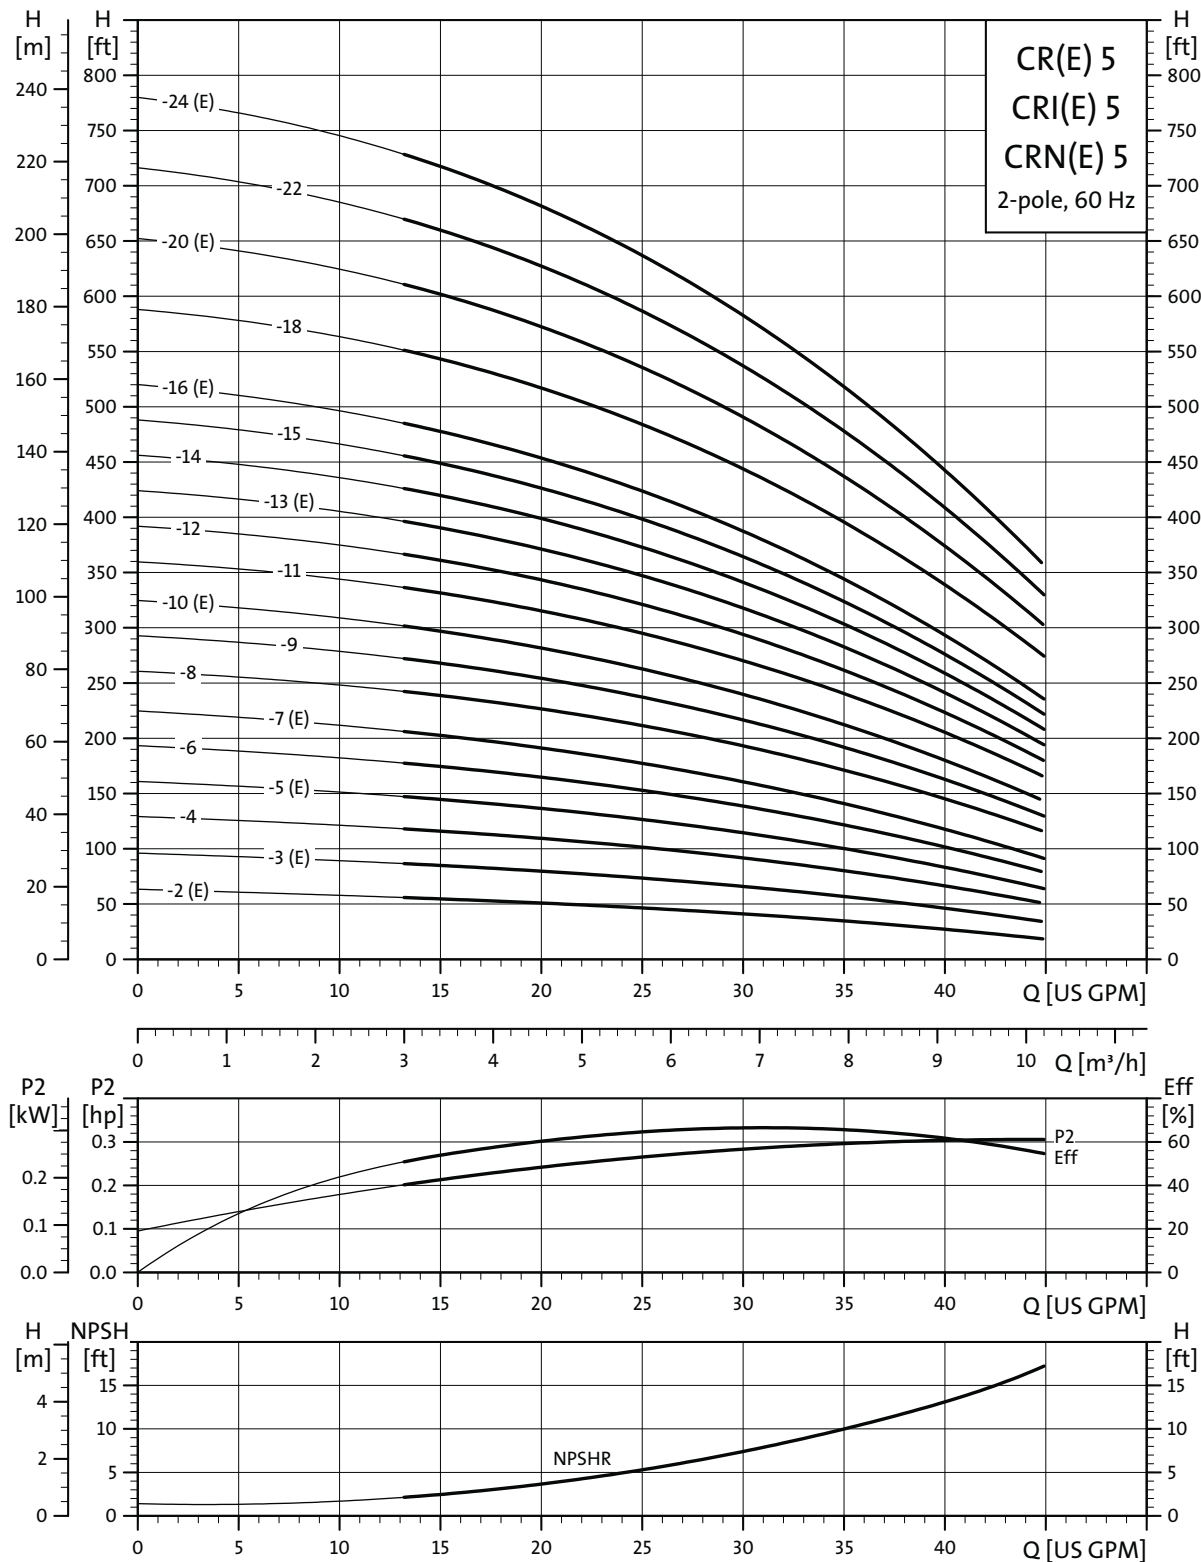

TM02 4085 1303

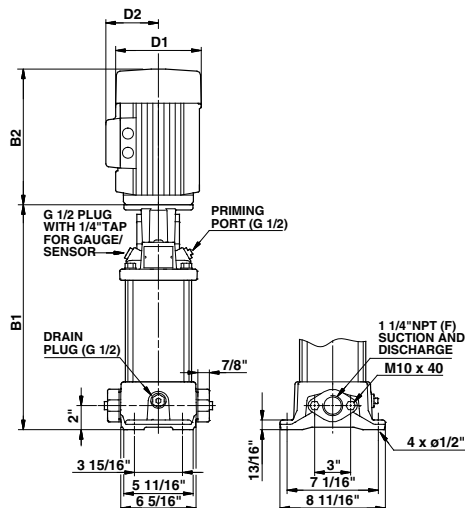

TM03 1455 2205

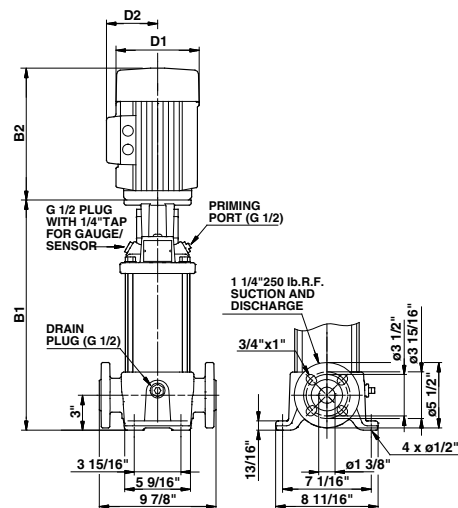


TM03 1451 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC				MLE				
					D1	D2	B1+B2		D1	D2	B1+B2		
CR(E) 5-2	3/4	1 3	• •	11.97 11.97	6.19 5.55	5.18 4.57	21.88 19.41	77 68	5.55 -	5.51 -	19.39 -	71 -	
CR(E) 5-3	1	1 3	• •	13.03 13.03	7.19 5.55	5.73 4.57	24.22 20.47	90 69	- 7.01	- 6.57	- 25.83	- 88	
CR 5-4	1 1/2	1 3	• •	14.09 14.09	7.19 5.55	5.73 4.57	25.77 22.71	94 71	5.55 7.01	5.51 6.57	23.07 26.89	79 92	
CR(E) 5-5	2	1 3	• •	15.16 15.16	7.19 7.01	5.73 4.33	27.72 26.38	106 93	- -	- -	- -	- -	
CR 5-6	2	1 3	• •	16.22 16.22	7.19 7.01	5.73 4.33	28.78 27.44	108 95	- 7.01	- 6.57	- 29.02	- 111	
CR(E) 5-7	3	1 3	• •	18.39 18.39	8.60 7.01	6.87 4.33	33.04 31.62	143 114	- -	- -	- -	- -	
CR 5-8	3	1 3	• •	19.45 19.45	8.60 7.01	6.87 4.33	34.10 32.68	145 116	- -	- -	- -	- -	
CR 5-9	3	1 3	• •	20.51 20.51	8.60 7.01	6.87 4.33	35.16 33.74	147 118	- 7.01	- 6.57	- 33.82	- 126	
CR(E) 5-10	5	1 3	• •	21.57 21.57	10.62 8.66	7.46 5.28	37.09 37.08	170 168	- -	- -	- -	- -	
CR 5-11	5	1 3	• •	22.64 22.64	10.62 8.66	7.46 5.28	38.16 38.15	172 169	- -	- -	- -	- -	
CR 5-12	5	1 3	• •	23.70 23.70	10.62 8.66	7.46 5.28	39.22 39.21	177 170	- -	- -	- -	- -	
CR(E) 5-13	5	1 3	• •	24.76 24.76	10.62 8.66	7.46 5.28	40.28 40.27	178 171	- 8.66	- 7.40	- 40.27	- 166	
CR 5-14	5	1 3	• •	25.83 25.83	10.62 8.66	7.46 5.28	41.35 41.34	180 176	- -	- -	- -	- -	
CR 5-15	5	1 3	• •	26.89 26.89	10.62 8.66	7.46 5.28	42.41 42.40	181 177	- 8.66	- 7.40	- 42.40	- 169	
CR(E) 5-16	5	1 3	• •	27.95 27.95	10.62 8.66	7.46 5.28	43.47 43.46	182 178	- 8.66	- 7.40	- 43.46	- 170	
CR 5-18	7 1/2	1 3	- -	30.59 30.59	10.22 8.66	7.62 5.28	46.12 46.10	200 188	- -	- -	- -	- -	
CR(E) 5-20	7 1/2	1 3	- -	32.72 32.72	10.22 8.66	7.62 5.28	48.25 48.23	203 190	- 8.66	- 7.40	- 48.23	- 204	
CR 5-22	7 1/2	1 3	- -	34.84 34.84	10.22 8.66	7.62 5.28	50.37 50.35	300 287	- -	- -	- -	- -	
CR(E) 5-24	7 1/2	1 3	- -	36.97 36.97	10.22 8.66	7.62 5.28	52.50 52.48	302 290	- 8.66	- 7.40	- 52.48	- 303	


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pumps and weight is approximately 9 lbs. less.

• Available.

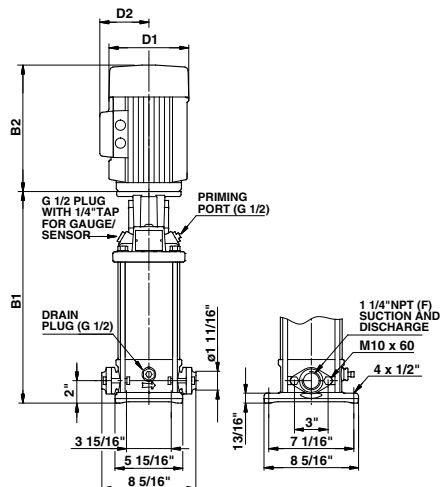

TM03 1456 2205

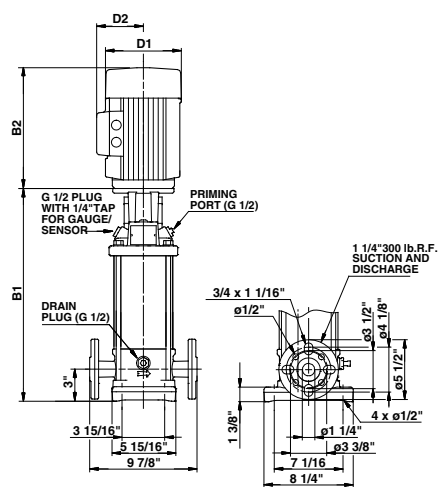


TM03 1453 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]			Ship Wt. [lbs.]
				B1	TEFC				MLE			
					D1	D2	B1+B2		D1	D2	B1+B2	
CRI(E) 5-2	3/4	1	•	12.09	6.19	5.18	22.00	71	5.55	5.51	19.51	66
		3	•	12.09	5.55	4.57	19.53	62	-	-	-	-
CRI(E) 5-3	1	1	•	13.15	7.19	5.73	24.34	85	-	-	-	-
		3	•	13.15	5.55	4.57	20.59	64	7.01	6.57	25.95	83
CRI 5-4	1 1/2	1	•	14.21	7.19	5.73	25.89	89	5.55	5.51	23.19	74
		3	•	14.21	5.55	4.57	22.83	66	7.01	6.57	27.01	87
CRI(E) 5-5	2	1	•	15.28	7.19	5.73	27.84	101	-	-	-	-
		3	•	15.28	7.01	4.33	26.50	88	-	-	-	-
CRI 5-6	2	1	•	16.34	7.19	5.73	28.90	103	-	-	-	-
		3	•	16.34	7.01	4.33	27.56	90	7.01	6.57	29.14	106
CRI(E) 5-7	3	1	•	18.51	8.60	6.87	33.16	136	-	-	-	-
		3	•	18.51	7.01	4.33	31.74	107	-	-	-	-
CRI 5-8	3	1	•	19.57	8.60	6.87	34.22	138	-	-	-	-
		3	•	19.57	7.01	4.33	32.80	109	-	-	-	-
CRI 5-9	3	1	•	20.63	8.60	6.87	35.28	140	-	-	-	-
		3	•	20.63	7.01	4.33	33.86	111	7.01	6.57	33.94	120
CRI(E) 5-10	5	1	•	21.69	10.62	7.46	37.21	163	-	-	-	-
		3	•	21.69	8.66	5.28	37.20	160	-	-	-	-
CRI 5-11	5	1	•	22.76	10.62	7.46	38.28	165	-	-	-	-
		3	•	22.76	8.66	5.28	38.27	162	-	-	-	-
CRI 5-12	5	1	•	23.82	10.62	7.46	39.34	170	-	-	-	-
		3	•	23.82	8.66	5.28	39.33	163	-	-	-	-
CRI(E) 5-13	5	1	•	24.88	10.62	7.46	40.40	171	-	-	-	-
		3	•	24.88	8.66	5.28	40.39	164	8.66	7.40	40.39	159
CRI 5-14	5	1	•	25.94	10.62	7.46	41.46	173	-	-	-	-
		3	•	25.94	8.66	5.28	41.45	169	-	-	-	-
CRI 5-15	5	1	•	27.01	10.62	7.46	42.53	174	-	-	-	-
		3	•	27.01	8.66	5.28	42.52	170	8.66	7.40	42.52	161
CRI(E) 5-16	5	1	•	28.07	10.62	7.46	43.59	175	-	-	-	-
		3	•	28.07	8.66	5.28	43.58	171	8.66	7.40	43.58	163
CRI 5-18	7 1/2	1	-	30.71	10.22	7.62	46.24	193	-	-	-	-
		3	-	30.71	8.66	5.28	46.22	181	-	-	-	-
CRI(E) 5-20	7 1/2	1	-	32.83	10.22	7.62	48.36	196	-	-	-	-
		3	-	32.83	8.66	5.28	48.34	183	8.66	7.40	48.34	196
CRI 5-22	7 1/2	1	-	34.96	10.22	7.62	50.49	293	-	-	-	-
		3	-	34.96	8.66	5.28	50.47	280	-	-	-	-
CRI(E) 5-24	7 1/2	1	-	37.09	10.22	7.62	52.62	295	-	-	-	-
		3	-	37.09	8.66	5.28	52.60	283	8.66	7.40	52.60	295


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pumps and weight is approximately 9 lbs. less.

• Available.

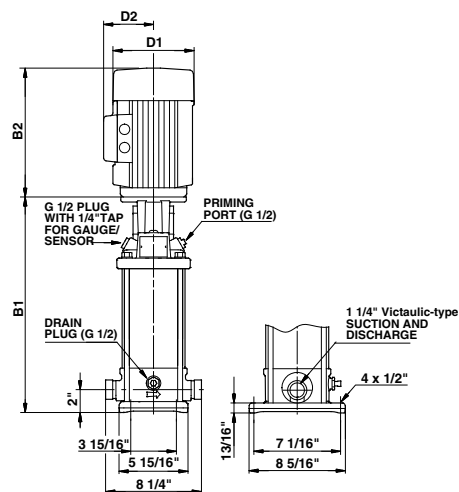

TM03 1454 2205

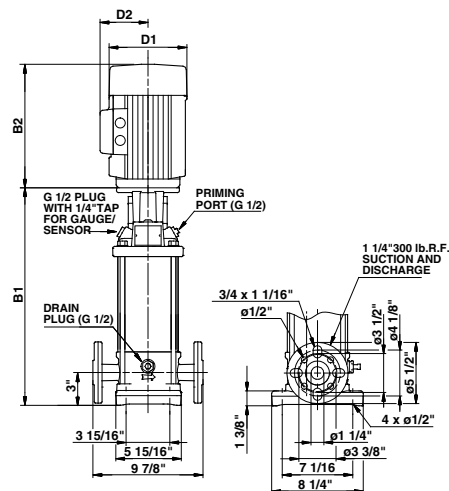

TM03 1453 2205


Pump type	P2 [hp]	Ph.	PJE*	ANSI dimensions [inch]				Ship Wt. [lbs.]	ANSI dimensions [inch]			Ship Wt. [lbs.]
				B1	TEFC				MLE			
					D1	D2	B1+B2		D1	D2	B1+B2	
CRN(E) 5-2	3/4	1	•	12.09	6.19	5.18	22.00	71	5.55	5.51	19.51	66
		3	•	12.09	5.55	4.57	19.53	62	-	-	-	-
CRN(E) 5-3	1	1	•	13.15	7.19	5.73	24.34	85	-	-	-	-
		3	•	13.15	5.55	4.57	20.59	64	7.01	6.57	25.95	83
CRN 5-4	1 1/2	1	•	14.21	7.19	5.73	25.89	89	5.55	5.51	23.19	74
		3	•	14.21	5.55	4.57	22.83	65	7.01	6.57	27.01	87
CRN(E) 5-5	2	1	•	15.28	7.19	5.73	27.84	101	-	-	-	-
		3	•	15.28	7.01	4.33	26.50	88	-	-	-	-
CRN 5-6	2	1	•	16.34	7.19	5.73	28.90	103	-	-	-	-
		3	•	16.34	7.01	4.33	27.56	90	7.01	6.57	29.14	106
CRN(E) 5-7	3	1	•	18.51	8.60	6.87	33.16	136	-	-	-	-
		3	•	18.51	7.01	4.33	31.74	107	-	-	-	-
CRN 5-8	3	1	•	19.57	8.60	6.87	34.22	138	-	-	-	-
		3	•	19.57	7.01	4.33	32.80	109	-	-	-	-
CRN 5-9	3	1	•	20.63	8.60	6.87	35.28	139	-	-	-	-
		3	•	20.63	7.01	4.33	33.86	110	7.01	6.57	33.94	120
CRN(E) 5-10	5	1	•	21.69	10.62	7.46	37.21	163	-	-	-	-
		3	•	21.69	8.66	5.28	37.20	160	-	-	-	-
CRN 5-11	5	1	•	22.76	10.62	7.46	38.28	165	-	-	-	-
		3	•	22.76	8.66	5.28	38.27	161	-	-	-	-
CRN 5-12	5	1	•	23.82	10.62	7.46	39.34	170	-	-	-	-
		3	•	23.82	8.66	5.28	39.33	163	-	-	-	-
CRN(E) 5-13	5	1	•	24.88	10.62	7.46	40.40	171	-	-	-	-
		3	•	24.88	8.66	5.28	40.39	164	8.66	7.40	40.39	159
CRN 5-14	5	1	•	25.94	10.62	7.46	41.46	172	-	-	-	-
		3	•	25.94	8.66	5.28	41.45	169	-	-	-	-
CRN 5-15	5	1	•	27.01	10.62	7.46	42.53	173	-	-	-	-
		3	•	27.01	8.66	5.28	42.52	170	8.66	7.40	42.52	161
CRN(E) 5-16	5	1	•	28.07	10.62	7.46	43.59	175	-	-	-	-
		3	•	28.07	8.66	5.28	43.58	171	8.66	7.40	43.58	163
CRN 5-18	7 1/2	1	•	30.71	10.22	7.62	46.24	193	-	-	-	-
		3	•	30.71	8.66	5.28	46.22	180	-	-	-	-
CRN(E) 5-20	7 1/2	1	•	32.83	10.22	7.62	48.36	196	-	-	-	-
		3	•	32.83	8.66	5.28	48.34	183	8.66	7.40	48.34	196
CRN 5-22	7 1/2	1	•	34.96	10.22	7.62	50.49	292	-	-	-	-
		3	•	34.96	8.66	5.28	50.47	279	-	-	-	-
CRN(E) 5-24	7 1/2	1	•	37.09	10.22	7.62	52.62	295	-	-	-	-
		3	•	37.09	8.66	5.28	52.60	282	8.66	7.40	52.60	295

All dimensions in inches unless otherwise noted.


*PJE flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pumps and weight is approximately 9 lbs. less.

• Available.


CR(E), CRI(E), CRN(E) 10

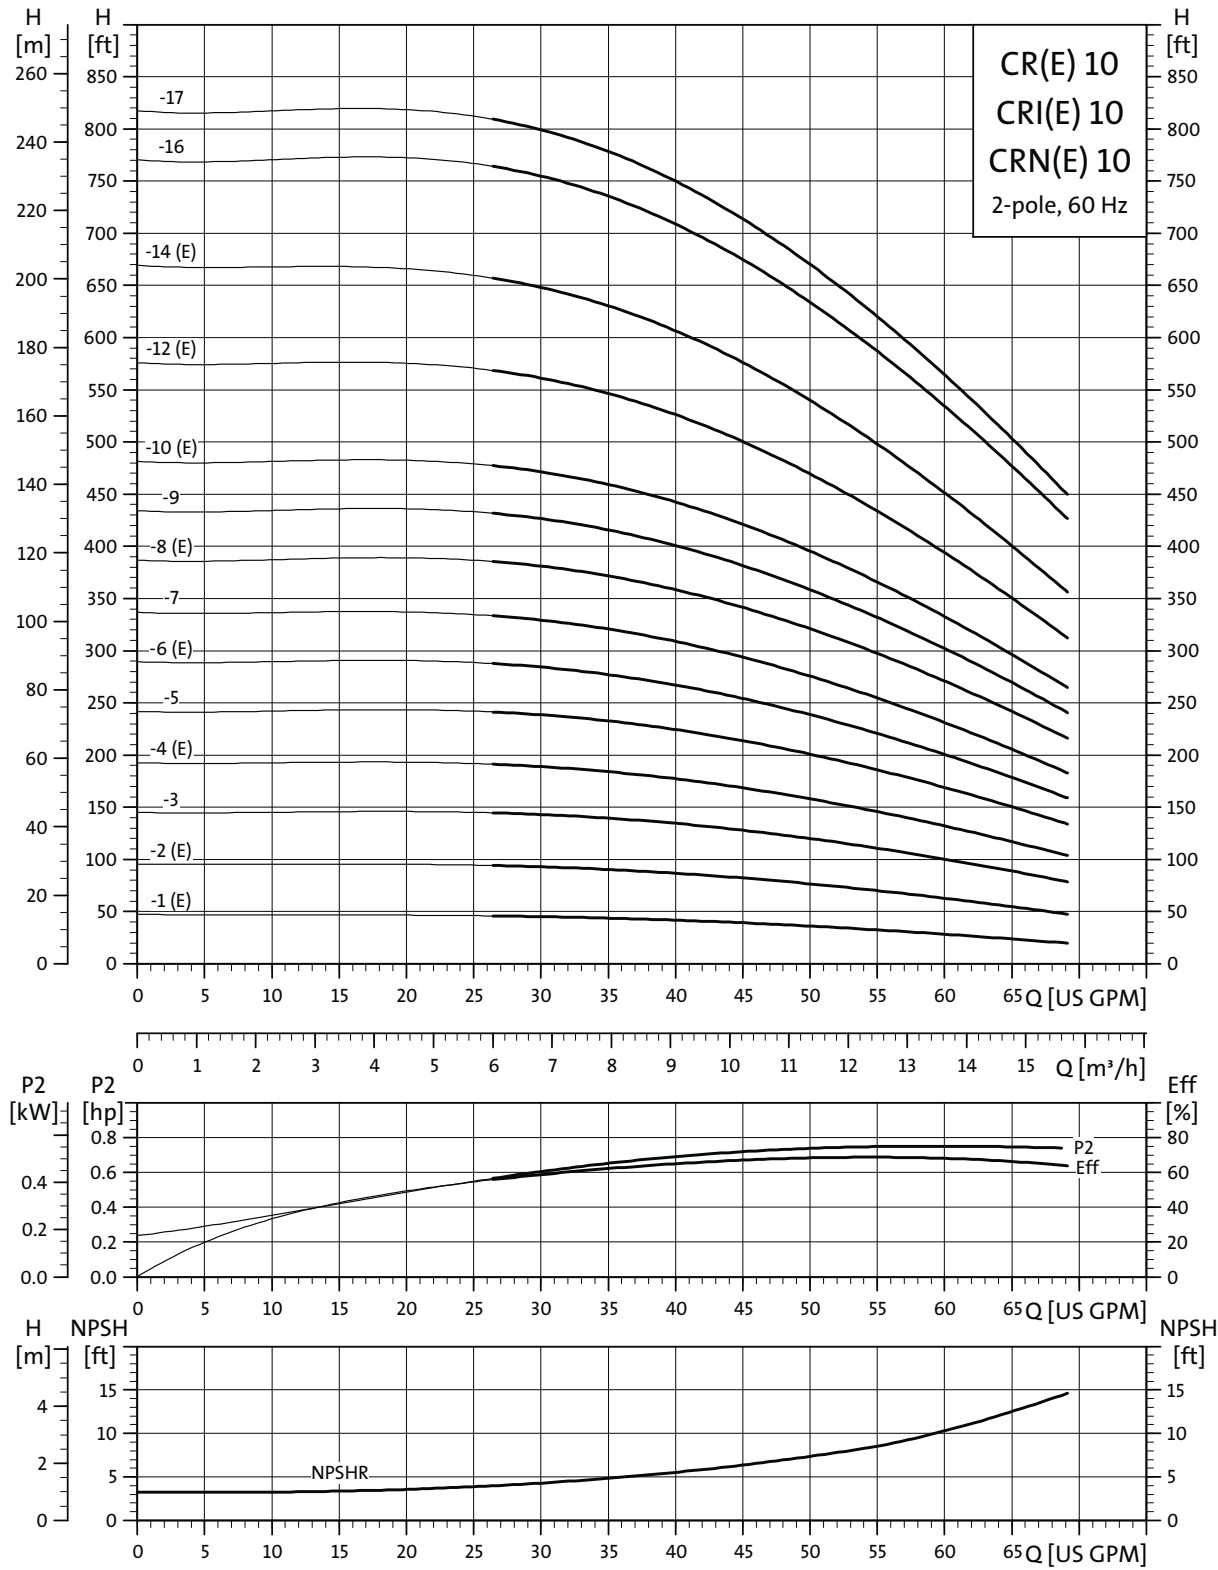

TM02 7221 3704

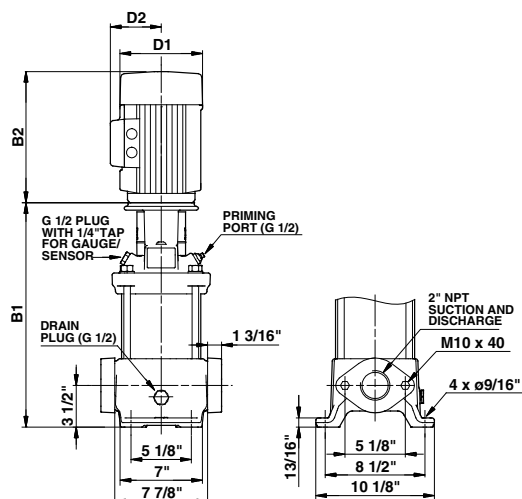

TM03 1460 2205

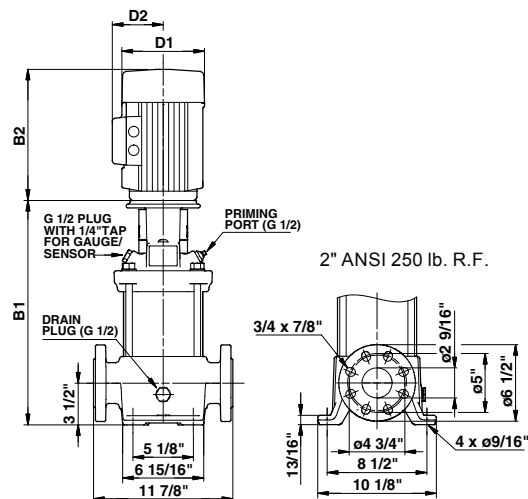


TM03 1461 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			ODP				MLE				
					D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CR(E) 10-1	3/4	1 3	• •	15.28 15.28	7.19 5.55	5.73 4.57	26.47 22.72	- -	- -	- -	115 106	5.55 7.01	5.51 6.57	24.26 28.08	108 128	
CR(E) 10-2	1 1/2	1 3	• •	15.28 15.28	7.19 5.55	5.73 4.57	26.96 23.90	- -	- -	- -	128 106	- 7.01	- 6.57	- 28.08	- 128	
CR 10-3	3	1 3	• •	17.20 17.20	8.60 7.01	6.87 4.33	31.85 30.43	- -	- -	- -	183 153	- -	- -	- -	- -	
CR(E) 10-4	3	1 3	• •	18.39 18.39	8.60 7.01	6.87 4.33	33.04 31.62	- -	- -	- -	183 156	- 7.01	- 6.57	- 31.70	- 163	
CR 10-5	5	1 3	• •	19.57 19.57	10.62 8.66	7.46 5.28	35.09 35.08	- -	- -	- -	209 206	- -	- -	- -	- -	
CR(E) 10-6	5	1 3	• •	20.75 20.75	10.62 8.66	7.46 5.28	36.27 36.26	- -	- -	- -	212 208	- 8.66	- 7.40	- 36.26	- 201	
CR 10-7	7 1/2	1 3	- -	22.25 22.25	10.22 8.66	7.62 5.28	37.78 37.76	- -	- -	- -	232 221	- -	- -	- -	- -	
CR(E) 10-8	7 1/2	1 3	- -	23.43 23.43	10.22 8.66	7.62 5.28	38.96 38.94	- -	- -	- -	234 223	- 8.66	- 7.40	- 38.94	- 236	
CR 10-9	7 1/2	1 3	- -	24.61 24.61	10.22 8.66	7.62 5.28	40.14 40.12	- -	- -	- -	236 225	- -	- -	- -	- -	
CR(E) 10-10	7 1/2	1 3	- -	25.79 25.79	10.22 8.66	7.62 5.28	41.32 41.30	- -	- -	- -	238 227	- 8.66	- 7.40	- 41.30	- 240	
CR(E) 10-12	10	1 3	- -	28.15 28.15	10.23 8.66	10.30 5.28	44.22 43.66	- -	- -	- -	355 232	- 10.24	- 8.39	- 43.07	- 251	
CR(E) 10-14	15	3	-	33.06	10.22	8.67	49.64	10.62	7.33	49.37	443	-	-	-	-	
CR 10-16	15	3	-	35.43	10.22	8.67	52.01	10.62	7.33	51.74	451	-	-	-	-	
CR 10-17	15	3	-	37.80	10.22	8.67	54.38	10.62	7.33	54.11	455	-	-	-	-	

All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 3 lbs. less.

• Available.

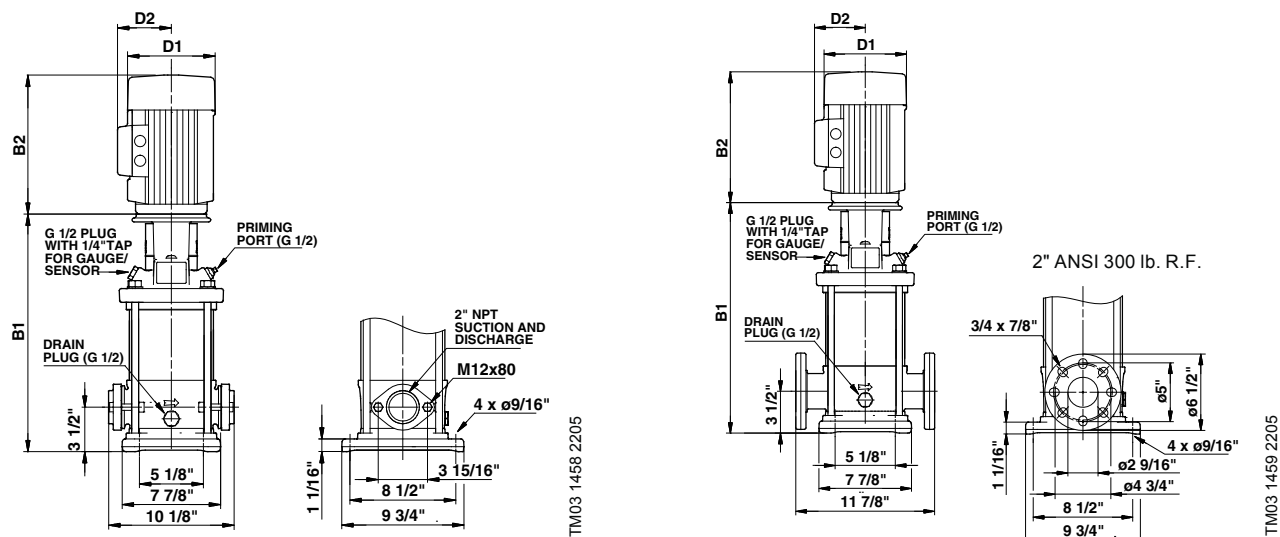


Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			ODP				MLE				
					D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CRI(E) 10-1	1	1 3	• •	15.20	7.19	5.73	26.39	-	-	-	106	5.55	5.51	24.18	97	
				15.20	5.55	4.57	22.64	-	-	-	97	7.01	6.57	28.00	119	
CRI(E) 10-2	1 1/2	1 3	• •	15.20	7.19	5.73	26.88	-	-	-	121	-	-	-	-	
				15.20	5.55	4.57	23.82	-	-	-	99	7.01	6.57	28.00	119	
CRI 10-3	3	1 3	• •	17.13	8.60	6.87	31.78	-	-	-	174	-	-	-	-	
				17.13	7.01	4.33	30.36	-	-	-	147	-	-	-	-	
CRI(E) 10-4	3	1 3	• •	18.31	8.60	6.87	32.96	-	-	-	176	-	-	-	-	
				18.31	7.01	4.33	31.54	-	-	-	147	7.01	6.57	31.62	157	
CRI 10-5	5	1 3	• •	19.49	10.62	7.46	35.01	-	-	-	203	-	-	-	-	
				19.49	8.66	5.28	35.00	-	-	-	199	-	-	-	-	
CRI(E) 10-6	5	1 3	• •	20.67	10.62	7.46	36.19	-	-	-	205	-	-	-	-	
				20.67	8.66	5.28	36.18	-	-	-	201	8.66	7.40	36.18	194	
CRI 10-7	7 1/2	1 3	• •	22.17	10.22	7.62	37.70	-	-	-	225	-	-	-	-	
				22.17	8.66	5.28	37.68	-	-	-	212	-	-	-	-	
CRI(E) 10-8	7 1/2	1 3	• •	23.35	10.22	7.62	38.88	-	-	-	227	-	-	-	-	
				23.35	8.66	5.28	38.86	-	-	-	214	8.66	7.40	38.86	229	
CRI 10-9	7 1/2	1 3	• •	24.53	10.22	7.62	40.06	-	-	-	229	-	-	-	-	
				24.53	8.66	5.28	40.04	-	-	-	216	-	-	-	-	
CRI(E) 10-10	7 1/2	1 3	• •	25.71	10.22	7.62	41.24	-	-	-	232	-	-	-	-	
				25.71	8.66	5.28	41.22	-	-	-	218	8.66	7.40	41.22	234	
CRI(E) 10-12	10	1 3	- -	28.07	10.23	10.30	44.14	-	-	-	346	-	-	-	-	
				28.07	8.66	5.28	43.58	-	-	-	225	10.24	8.39	42.99	243	
CRI(E) 10-14	15	3	-	32.95	10.22	8.67	49.53	10.62	7.33	49.26	432	-	-	-	-	
CRI 10-16	15	3	-	35.31	10.22	8.67	51.89	10.62	7.33	51.62	442	-	-	-	-	
CRI 10-17	15	3	-	37.68	10.22	8.67	54.26	10.62	7.33	53.99	447	-	-	-	-	


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 7 lbs. less.

• Available.

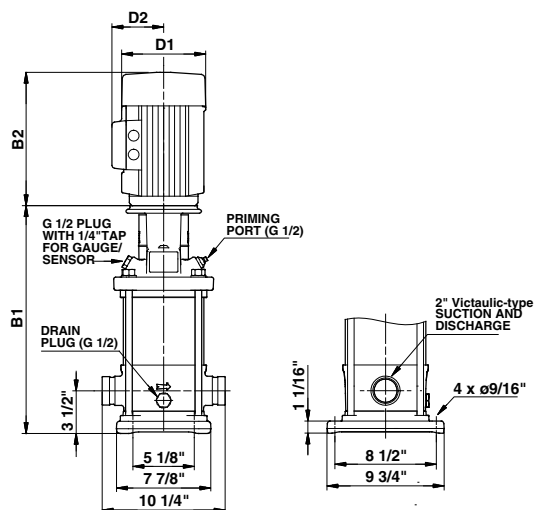

TM03 1457 2205

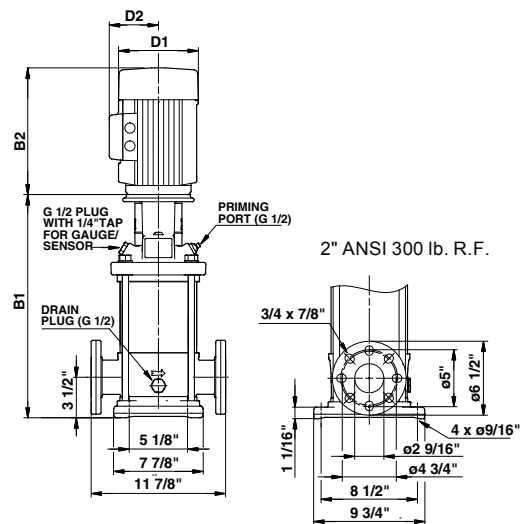

TM03 1459 2205


Pump type	P2 [hp]	Ph.	PJE*	ANSI dimensions [inch]								Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			ODP			MLE						
					D1	D2	B1+B2	D1	D2	B1+B2	D1		D2	B1+B2			
CRN(E) 10-1	1	1	●	15.20	7.19	5.73	26.39	-	-	-	106	5.55	5.51	24.18	97		
		3	●	15.20	5.55	4.57	22.64	-	-	-	97	7.01	6.57	28.00	119		
CRN(E) 10-2	1 1/2	1	●	15.20	7.19	5.73	26.88	-	-	-	121	-	-	-	-		
		3	●	15.20	5.55	4.57	23.82	-	-	-	99	7.01	6.57	28.00	119		
CRN 10-3	3	1	●	17.13	8.60	6.87	31.78	-	-	-	176	-	-	-	-		
		3	●	17.13	7.01	4.33	30.36	-	-	-	147	-	-	-	-		
CRN(E) 10-4	3	1	●	18.31	8.60	6.87	32.96	-	-	-	176	-	-	-	-		
		3	●	18.31	7.01	4.33	31.54	-	-	-	149	7.01	6.57	31.62	157		
CRN 10-5	5	1	●	19.49	10.62	7.46	35.01	-	-	-	203	-	-	-	-		
		3	●	19.49	8.66	5.28	35.00	-	-	-	199	-	-	-	-		
CRN(E) 10-6	5	1	●	20.67	10.62	7.46	36.19	-	-	-	205	-	-	-	-		
		3	●	20.67	8.66	5.28	36.18	-	-	-	201	8.66	7.40	36.18	194		
CRN 10-7	7 1/2	1	●	22.17	10.22	7.62	37.70	-	-	-	227	-	-	-	-		
		3	●	22.17	8.66	5.28	37.68	-	-	-	214	-	-	-	-		
CRN(E) 10-8	7 1/2	1	●	23.35	10.22	7.62	38.88	-	-	-	229	-	-	-	-		
		3	●	23.35	8.66	5.28	38.86	-	-	-	216	8.66	7.40	38.86	229		
CRN 10-9	7 1/2	1	●	24.53	10.22	7.62	40.06	-	-	-	232	-	-	-	-		
		3	●	24.53	8.66	5.28	40.04	-	-	-	218	-	-	-	-		
CRN(E) 10-10	7 1/2	1	●	25.71	10.22	7.62	41.24	-	-	-	234	-	-	-	-		
		3	●	25.71	8.66	5.28	41.22	-	-	-	221	8.66	7.40	41.22	234		
CRN(E) 10-12	10	1	●	28.07	10.23	10.30	44.14	-	-	-	346	-	-	-	-		
		3	●	28.07	8.66	5.28	43.58	-	-	-	225	10.24	8.39	42.99	243		
CRN(E) 10-14	15	3	●	32.95	10.22	8.67	49.53	10.62	7.33	49.25	432	-	-	-	-		
CRN 10-16	15	3	●	35.31	10.22	8.67	51.89	10.62	7.33	51.63	442	-	-	-	-		
CRN 10-17	15	3	●	37.68	10.22	8.67	54.26	10.62	7.33	54.00	447	-	-	-	-		

All dimensions in inches unless otherwise noted.


*PJE flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 9 lbs. less.

• Available


CR(E), CRI(E), CRN(E) 15

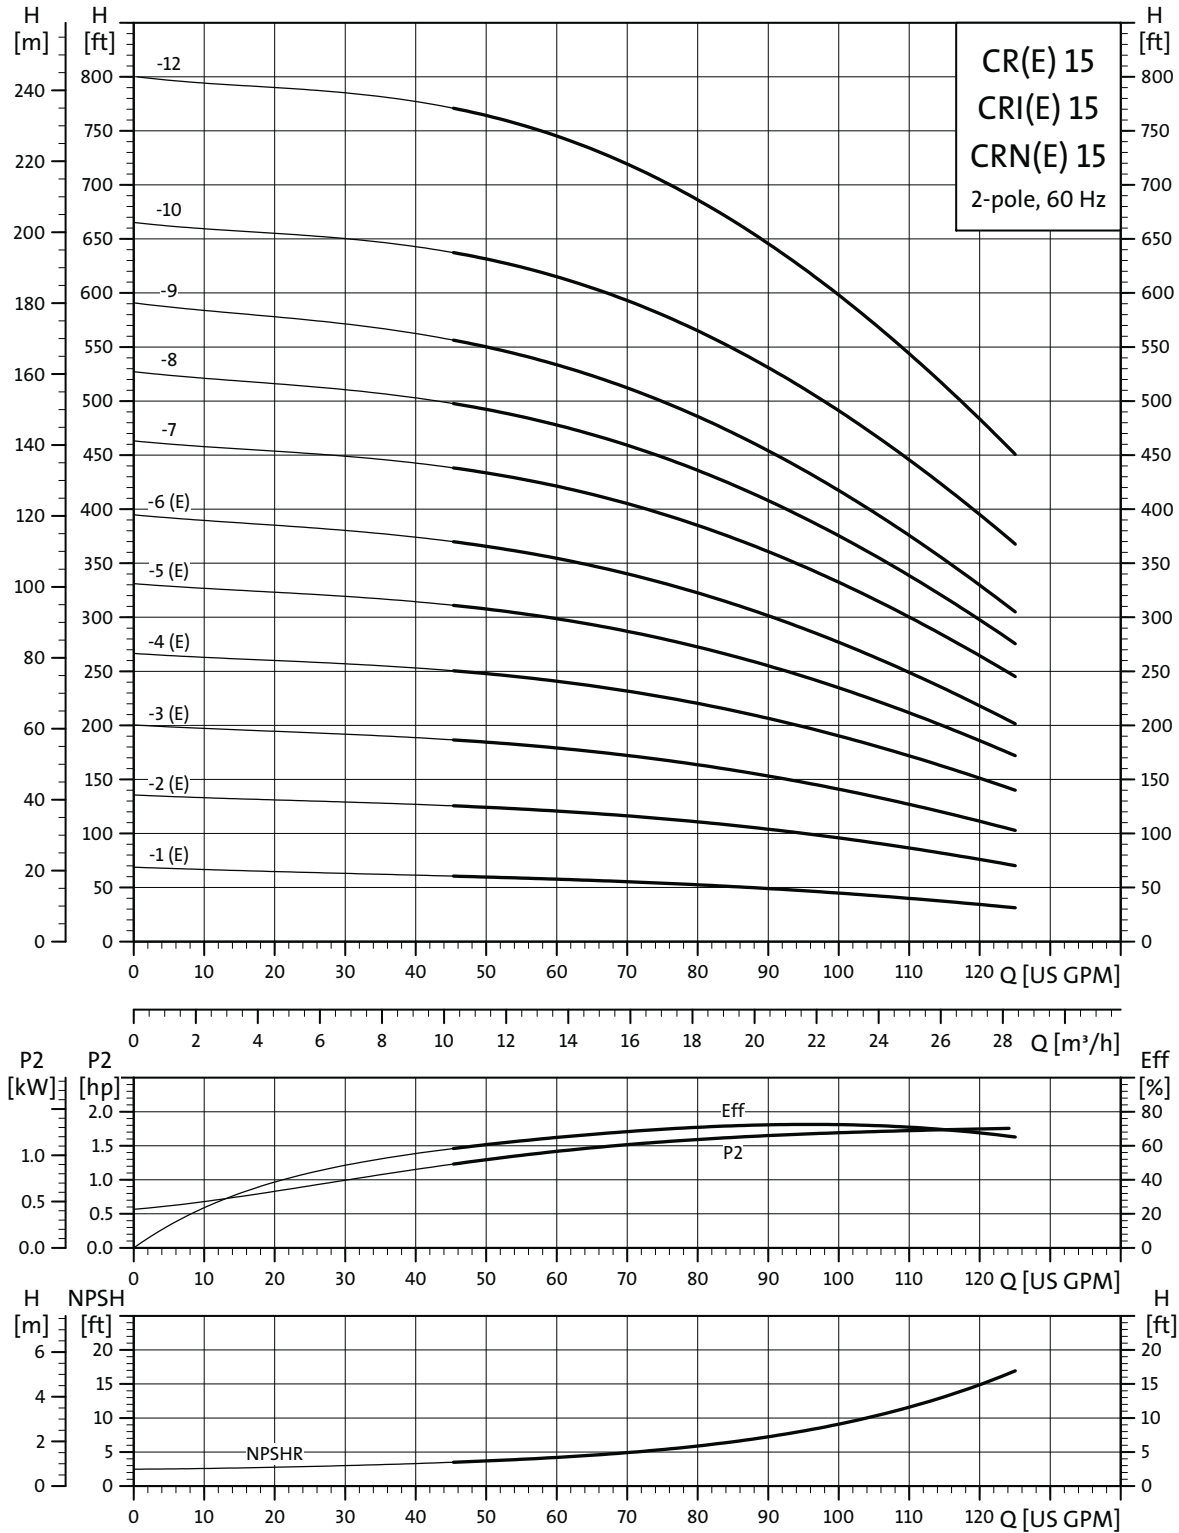

TM02 7222 2803

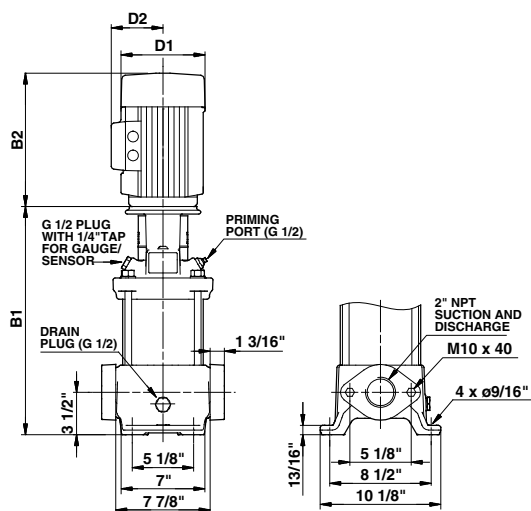

TM03 1460 2205

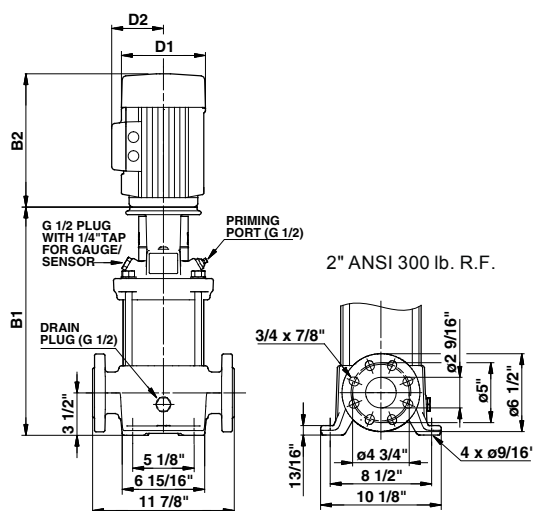


TM03 1461 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			ODP				MLE				
					D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CR(E) 15-1	2	1	•	16.46	7.19	5.73	29.02	-	-	-	139	-	-	-	-	
		3	•	16.46	7.01	4.33	27.68	-	-	-	128	7.01	6.57	29.26	141	
CR(E) 15-2	5	1	•	17.20	10.62	7.46	32.72	-	-	-	205	-	-	-	-	
		3	•	17.20	8.66	5.28	32.71	-	-	-	201	8.66	7.40	30.00	194	
CR(E) 15-3	7 1/2	1	•	19.29	10.22	7.62	34.82	-	-	-	223	-	-	-	-	
		3	•	19.29	8.66	5.28	34.80	-	-	-	212	8.66	7.40	19.29	206	
CR(E) 15-4	7 1/2	1	•	21.06	10.22	7.62	36.59	-	-	-	225	-	-	-	-	
		3	•	21.06	8.66	5.28	36.57	-	-	-	214	8.66	7.40	34.37	227	
CR(E) 15-5	10	1	•	22.83	10.23	10.30	38.90	-	-	-	342	-	-	-	-	
		3	•	22.83	8.66	5.28	38.34	-	-	-	218	10.24	8.39	22.83	238	
CR(E) 15-6	15	3	-	27.17	10.22	8.67	43.75	10.62	7.33	43.48	376	-	-	-	-	
CR 15-7	15	3	-	28.94	10.22	8.67	45.52	10.62	7.33	45.25	407	-	-	-	-	
CR 15-8	15	3	-	30.71	10.22	8.67	47.29	10.62	7.33	47.02	438	-	-	-	-	
CR 15-9	20	3	-	32.48	10.22	8.67	49.06	11.50	8.92	52.17	446	-	-	-	-	
CR 15-10	20	3	-	34.25	10.22	8.67	50.83	11.50	8.92	53.94	450	-	-	-	-	
CR 15-12	25	3	-	37.17	12.94	11.52	56.99	11.50	8.94	57.98	505	-	-	-	-	


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 3 lbs. less.

• Available.

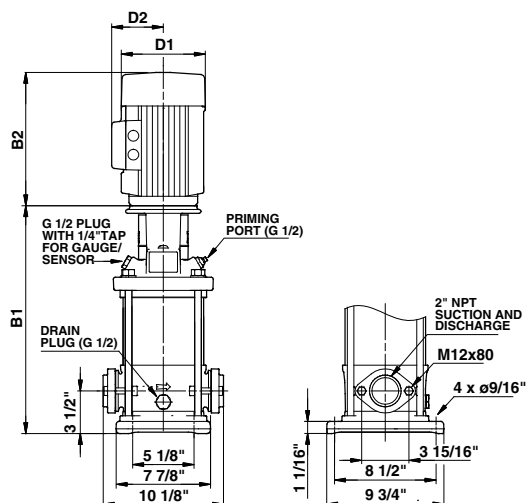

TM03 1458 2205

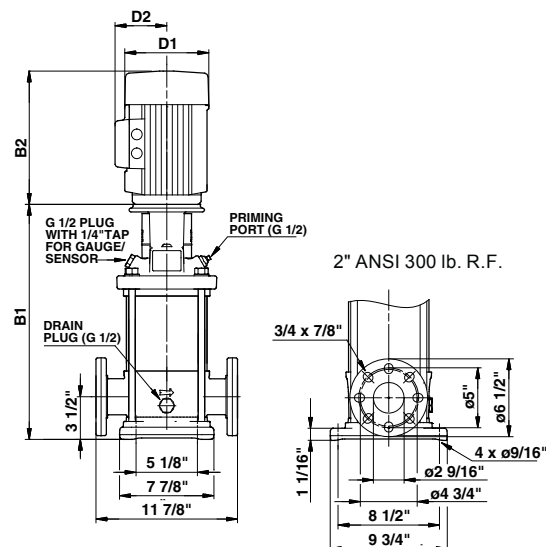

TM03 1459 2205

Pump type	P2 [hp]	Ph.	Oval*	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
				B1	TEFC			ODP				MLE				
					D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CRI(E) 15-1	2	1	•	16.38	7.19	5.73	28.94	-	-	-	130	-	-	-	-	
		3	•	16.38	7.01	4.33	27.60	-	-	-	121	7.01	6.57	29.18	135	
CRI(E) 15-2	5	1	•	17.13	10.62	7.46	32.65	-	-	-	198	-	-	-	-	
		3	•	17.13	8.66	5.28	32.64	-	-	-	195	8.66	7.40	29.93	185	
CRI(E) 15-3	7 1/2	1	•	19.21	10.22	7.62	34.74	-	-	-	216	-	-	-	-	
		3	•	19.21	8.66	5.28	34.72	-	-	-	203	8.66	7.40	19.21	200	
CRI(E) 15-4	7 1/2	1	•	20.98	10.22	7.62	36.51	-	-	-	218	-	-	-	-	
		3	•	20.98	8.66	5.28	36.49	-	-	-	205	8.66	7.40	34.29	218	
CRI(E) 15-5	10	1	•	22.76	10.23	10.30	38.83	-	-	-	333	-	-	-	-	
		3	•	22.76	8.66	5.28	38.27	-	-	-	212	10.24	8.39	22.76	229	
CRI(E) 15-6	15	3	•	27.05	10.22	8.67	43.63	10.62	7.33	43.36	365	-	-	-	-	
CRI 15-7	15	3	•	28.82	10.22	8.67	45.40	10.62	7.33	45.13	398	-	-	-	-	
CRI 15-8	15	3	•	30.59	10.22	8.67	47.17	10.62	7.33	46.90	431	-	-	-	-	
CRI 15-9	20	3	-	32.36	10.22	8.67	48.94	11.50	8.92	52.05	439	-	-	-	-	
CRI 15-10	20	3	-	34.13	10.22	8.67	50.71	11.50	8.92	53.82	442	-	-	-	-	
CRI 15-12	25	3	-	37.05	12.94	11.52	56.87	11.50	8.94	57.86	496	-	-	-	-	


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 7 lbs. less.

• Available.

Technical data

CRN(E) 15

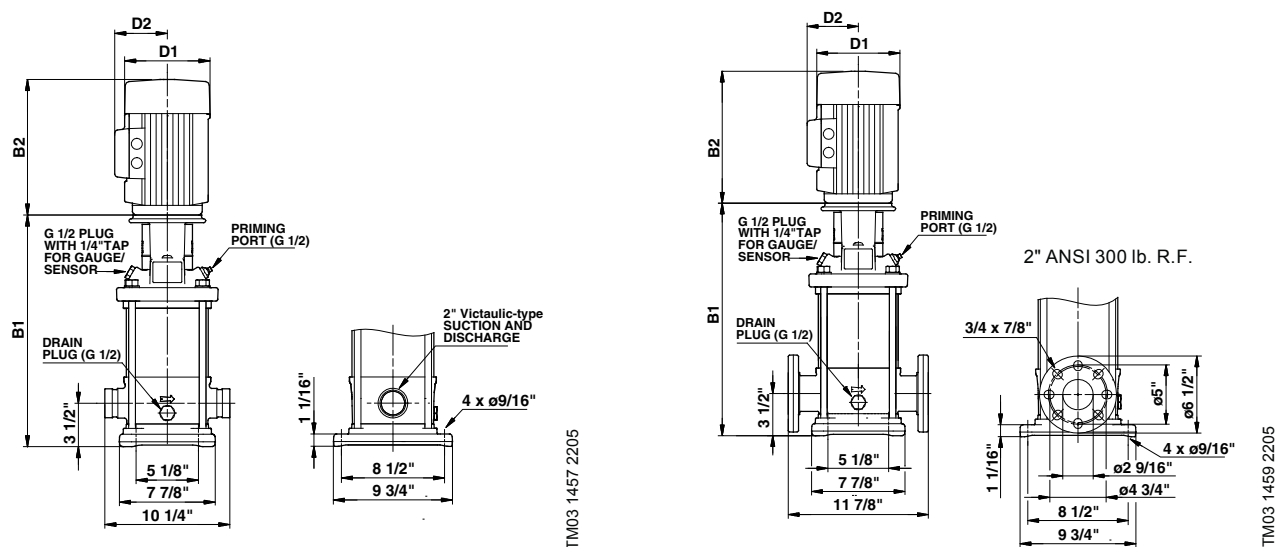


Pump type	P2 [hp]	Ph.	PJE*	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]			
				B1	TEFC			ODP				MLE	Ship Wt. [lbs.]		
					D1	D2	B1+B2	D1	D2	B1+B2				D1	D2
CRN(E) 15-1	2	1	•	16.38	7.19	5.73	28.94	-	-	-	130	-	-	-	-
		3	•	16.38	7.01	4.33	27.60	-	-	-	121	7.01	6.57	29.18	135
CRN(E) 15-2	5	1	•	17.44	10.62	7.46	32.96	-	-	-	203	-	-	-	-
		3	•	17.13	8.66	5.28	32.64	-	-	-	195	8.66	7.40	29.93	185
CRN(E) 15-3	7 1/2	1	•	19.21	10.22	7.62	34.74	-	-	-	216	-	-	-	-
		3	•	19.21	8.66	5.28	34.72	-	-	-	205	8.66	7.40	19.21	200
CRN(E) 15-4	7 1/2	1	•	20.98	10.22	7.62	36.51	-	-	-	218	-	-	-	-
		3	•	20.98	8.66	5.28	36.49	-	-	-	207	8.66	7.40	34.29	221
CRN(E) 15-5	10	1	•	22.76	10.23	10.30	38.83	-	-	-	335	-	-	-	-
		3	•	22.76	8.66	5.28	38.27	-	-	-	214	10.24	8.39	22.76	232
CRN(E) 15-6	15	3	•	27.05	10.22	8.67	43.63	10.62	7.33	43.36	365	-	-	-	-
CRN 15-7	15	3	•	28.82	10.22	8.67	45.40	10.62	7.33	45.13	398	-	-	-	-
CRN 15-8	15	3	•	30.59	10.22	8.67	47.17	10.62	7.33	46.90	431	-	-	-	-
CRN 15-9	20	3	•	32.36	10.22	8.67	48.94	11.50	8.92	52.05	439	-	-	-	-
CRN 15-10	20	3	•	34.13	10.22	8.67	50.71	11.50	8.92	53.82	442	-	-	-	-
CRN 15-12	25	3	•	37.05	12.94	11.52	56.87	11.50	8.94	57.86	496	-	-	-	-

All dimensions in inches unless otherwise noted.


*PJE flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pump and weight is approximately 9 lbs. less.

- Available.


CR(E), CRI(E), CRN(E) 20

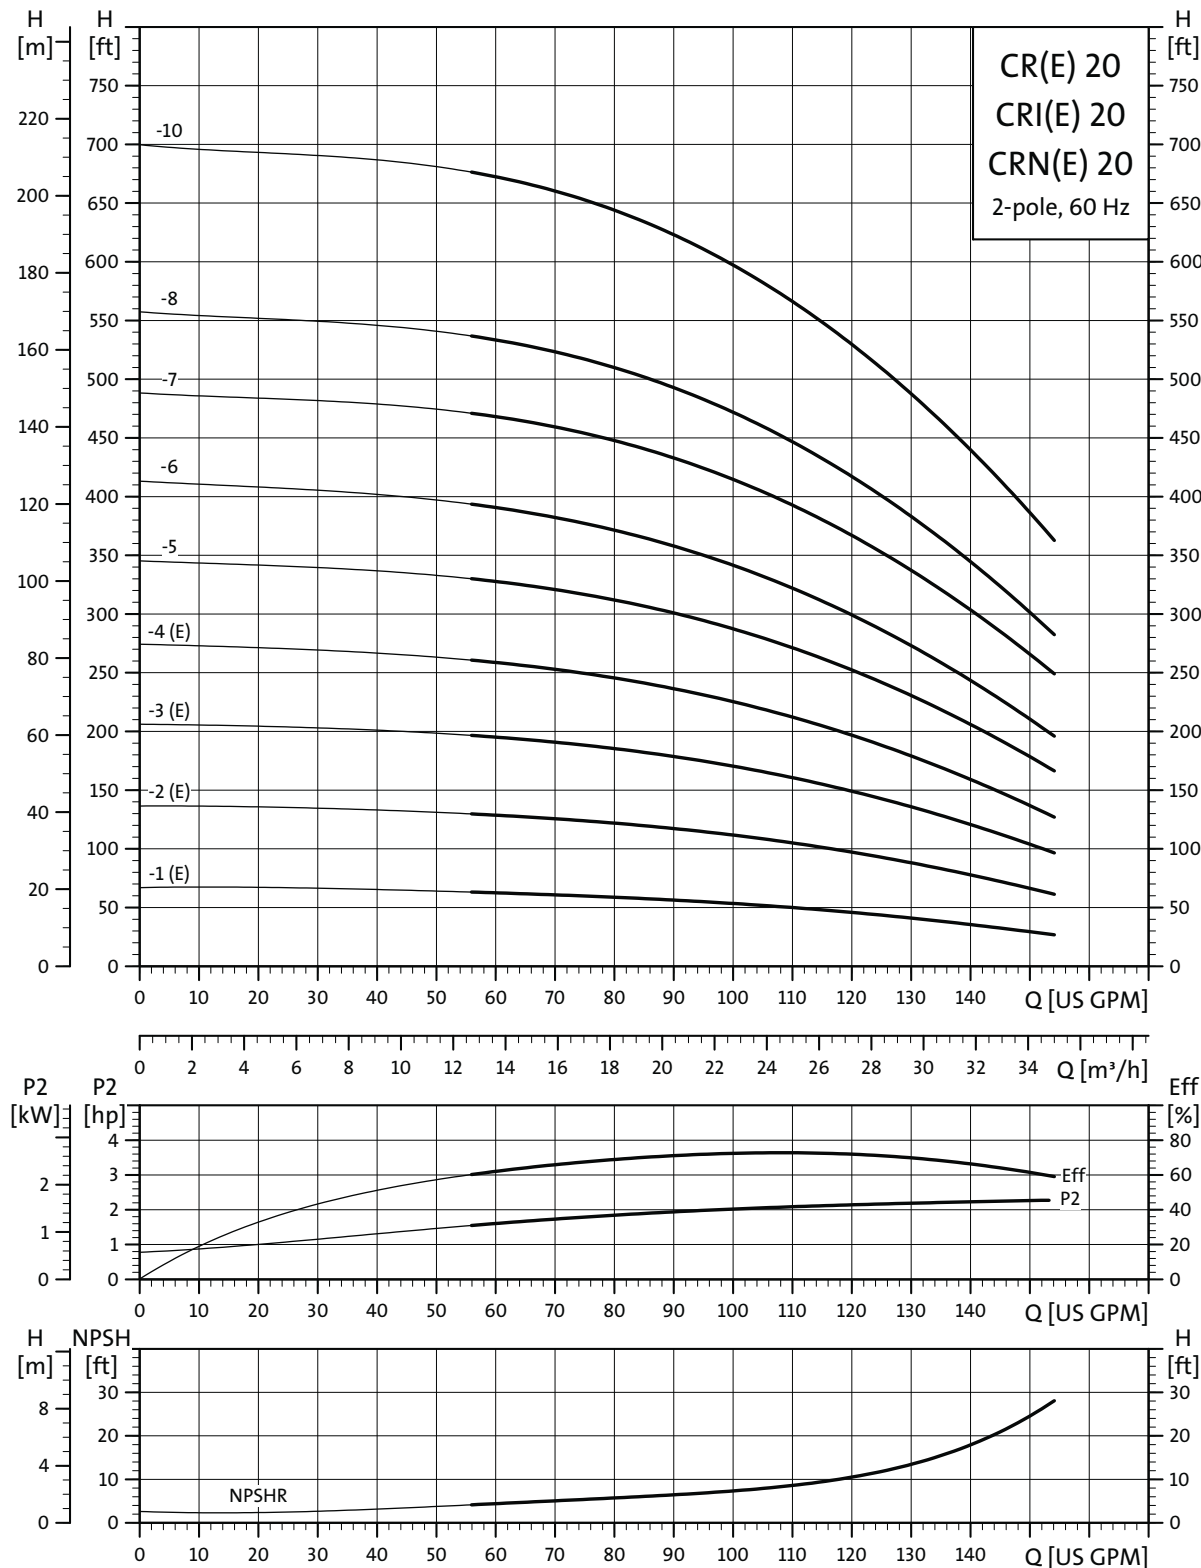

TM02 7223 2803

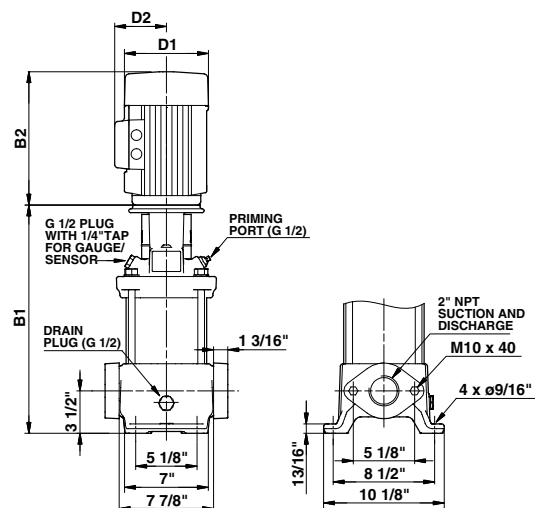

TM03 1460 2205

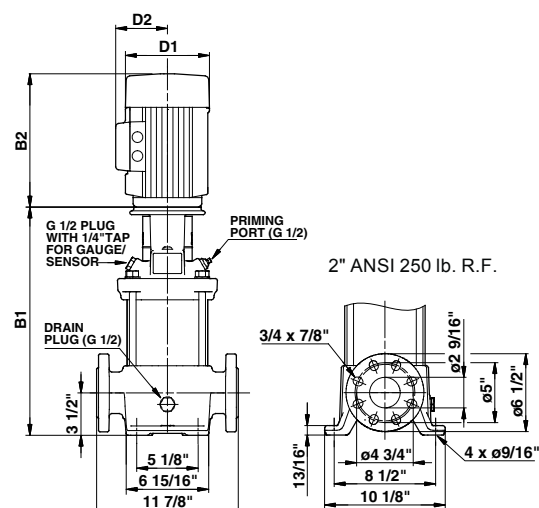


TM03 1461 2205

Pump type	P2 [hp]	Ph.	Dimensions [inch]										Dimensions [inch]			
			Oval*	B1	TEFC			ODP			Ship Wt. [lbs.]		MLE			Ship Wt. [lbs.]
					D1	D2	B1+B2	D1	D2	B1+B2			D1	D2	B1+B2	
CR(E) 20-1	3	1	•	17.20	8.60	6.87	31.85	-	-	-	181		-	-	-	-
		3	•	17.20	7.01	4.33	30.43	-	-	-	151		7.01	6.57	30.00	161
CR(E) 20-2	5	1	•	17.20	10.62	7.46	32.72	-	-	-	205		-	-	-	-
		3	•	17.20	8.66	5.28	32.71	-	-	-	201		8.66	7.40	30.00	194
CR(E) 20-3	7 1/2	1	•	19.29	10.22	7.62	34.82	-	-	-	223		-	-	-	-
		3	•	19.29	8.66	5.28	34.80	-	-	-	209		8.66	7.40	19.29	223
CR(E) 20-4	10	1	•	21.06	10.23	10.30	37.13	-	-	-	337		-	-	-	-
		3	•	21.06	8.66	5.28	36.57	-	-	-	214		10.24	8.39	34.37	232
CR 20-5	15	3	•	25.39	10.22	8.67	41.97	10.62	7.33	41.70	398		-	-	-	-
CR 20-6	15	3	•	27.17	10.22	8.67	43.75	10.62	7.33	43.48	402		-	-	-	-
CR 20-7	20	3	•	28.94	10.22	8.67	45.52	11.50	8.92	48.63	438		-	-	-	-
CR 20-8	20	3	-	30.71	10.22	8.67	47.29	11.50	8.92	50.40	442		-	-	-	-
CR 20-10	25	3	-	33.62	12.94	11.52	53.44	11.50	8.94	54.43	496		-	-	-	-


All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 3 lbs. less.

• Available.

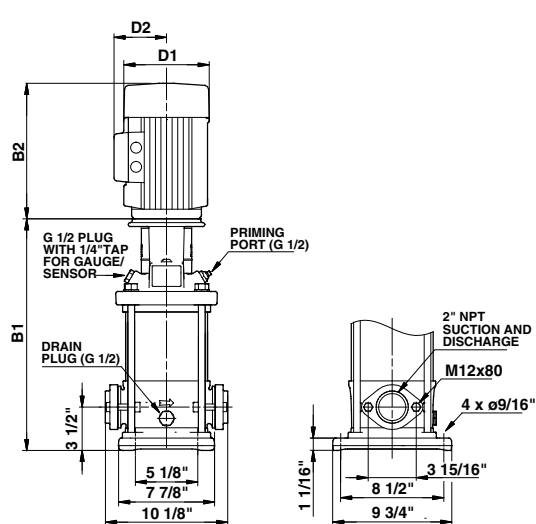

TM03 1456 2205

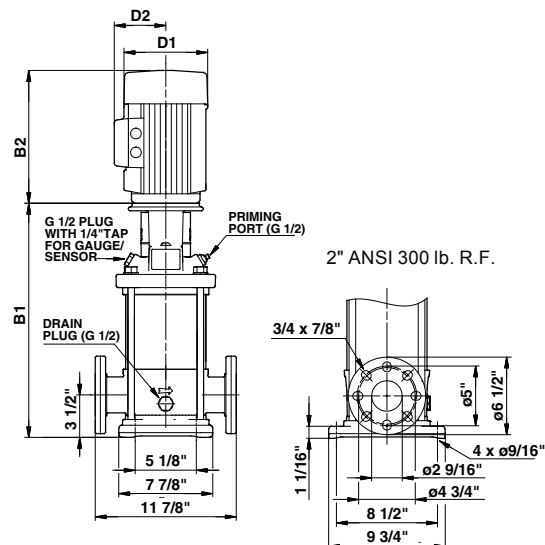


TM03 1459 2205

Pump type	P2 [hp]	Ph.	ANSI dimensions [inch]									Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
			Oval*	B1	TEFC			ODP			MLE						
					D1	D2	B1+B2	D1	D2	B1+B2	D1		D2	B1+B2			
CRI(E) 20-1	3	1	•	17.13	8.60	6.87	31.78	-	-	-	174	-	-	-	-		
		3	•	17.13	7.01	4.33	30.36	-	-	-	145	7.01	6.57	29.93	152		
CRI(E) 20-2	5	1	•	17.13	10.62	7.46	32.65	-	-	-	198	-	-	-	-		
		3	•	17.13	8.66	5.28	32.64	-	-	-	195	8.66	7.40	29.93	185		
CRI(E) 20-3	7 1/2	1	•	19.21	10.22	7.62	34.74	-	-	-	216	-	-	-	-		
		3	•	19.21	8.66	5.28	34.72	-	-	-	203	8.66	7.40	19.21	216		
CRI(E) 20-4	10	1	•	20.98	10.23	10.30	37.05	-	-	-	331	-	-	-	-		
		3	•	20.98	8.66	5.28	36.49	-	-	-	205	10.24	8.39	34.29	223		
CRI 20-5	15	3	•	25.28	10.22	8.67	41.86	10.62	7.33	41.59	391	-	-	-	-		
CRI 20-6	15	3	•	27.05	10.22	8.67	43.63	10.62	7.33	43.36	396	-	-	-	-		
CRI 20-7	20	3	•	28.82	10.22	8.67	45.40	11.50	8.92	48.51	431	-	-	-	-		
CRI 20-8	20	3	-	30.59	10.22	8.67	47.17	11.50	8.92	50.28	435	-	-	-	-		
CRI 20-10	25	3	-	33.50	12.94	11.52	53.32	11.50	8.94	54.31	490	-	-	-	-		

All dimensions in inches unless otherwise noted.

*Oval flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 7 lbs. less.

• Available.

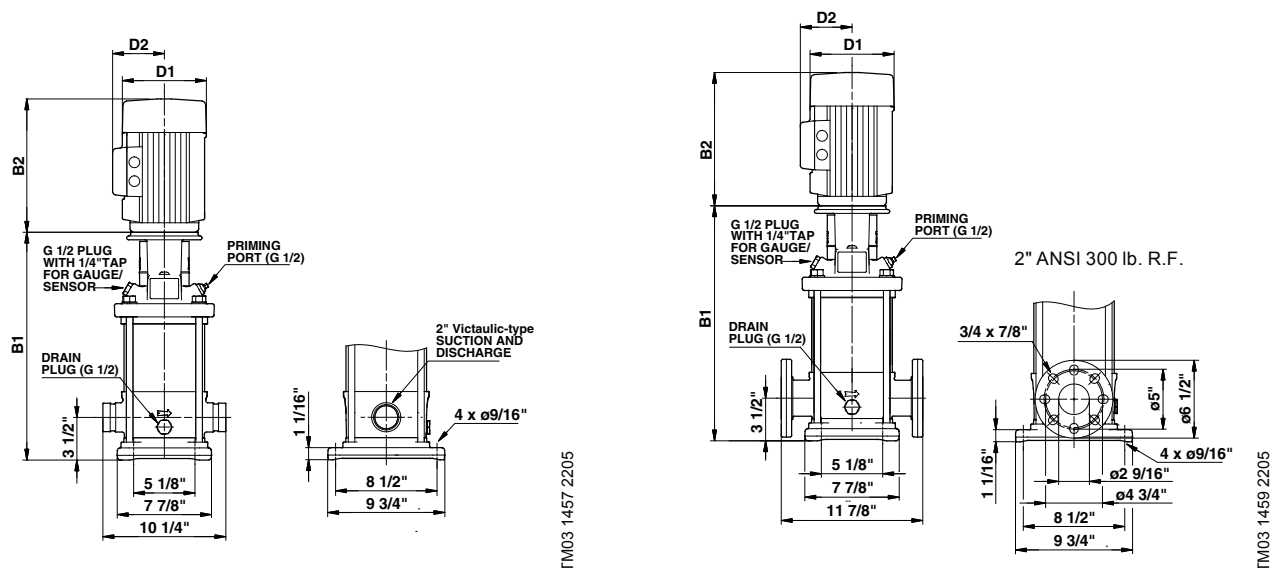


Pump type	P2 [hp]	Ph.	Dimensions [inch]									Ship Wt. [lbs.]	Dimensions [inch]				Ship Wt. [lbs.]
			PJE*	B1	TEFC			ODP			MLE						
					D1	D2	B1+B2	D1	D2	B1+B2	D1		D2	B1+B2			
CRN(E) 20-1	3	1	•	17.13	8.60	6.87	31.78	-	-	-	174	-	-	-	-		
		3	•	17.13	7.01	4.33	30.36	-	-	-	145	7.01	6.57	29.93	154		
CRN(E) 20-2	5	1	•	17.13	10.62	7.46	32.65	-	-	-	198	-	-	-	-		
		3	•	17.13	8.66	5.28	32.64	-	-	-	195	8.66	7.40	29.93	185		
CRN(E) 20-3	7 1/2	1	•	19.21	10.22	7.62	34.74	-	-	-	216	-	-	-	-		
		3	•	19.21	8.66	5.28	34.72	-	-	-	203	8.66	7.40	19.21	216		
CRN(E) 20-4	10	1	•	20.98	10.23	10.30	37.05	-	-	-	331	-	-	-	-		
		3	•	20.98	8.66	5.28	36.49	-	-	-	207	10.24	8.39	34.29	225		
CRN 20-5	15	3	•	25.28	10.22	8.67	41.86	10.62	7.33	41.59	394	-	-	-	-		
CRN 20-6	15	3	•	27.05	10.22	8.67	43.63	10.62	7.33	43.36	396	-	-	-	-		
CRN 20-7	20	3	•	28.82	10.22	8.67	45.40	11.50	8.92	48.51	431	-	-	-	-		
CRN 20-8	20	3	•	30.59	10.22	8.67	47.17	11.50	8.92	50.28	435	-	-	-	-		
CRN 20-10	25	3	•	33.50	12.94	11.52	53.32	11.50	8.94	54.31	490	-	-	-	-		

All dimensions in inches unless otherwise noted.


*PJE flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 9 lbs. less.

• Available.

CR(E), CRN(E) 32

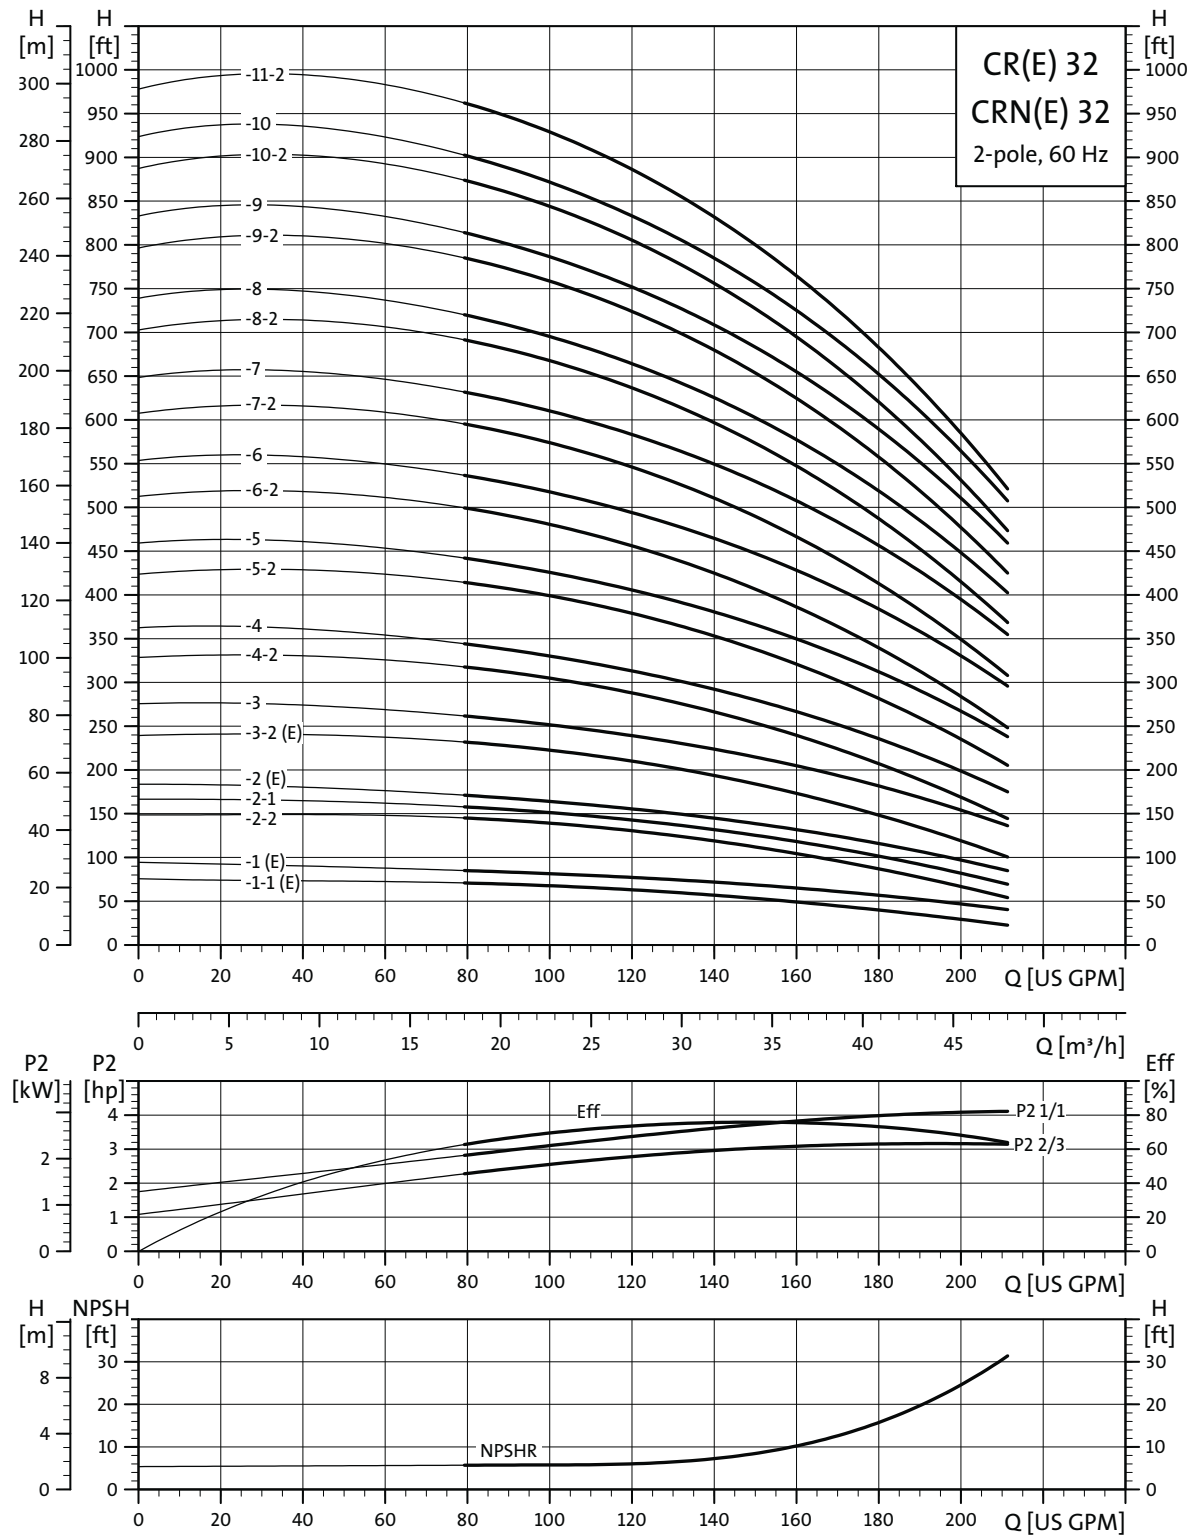


TM02 0039 1303

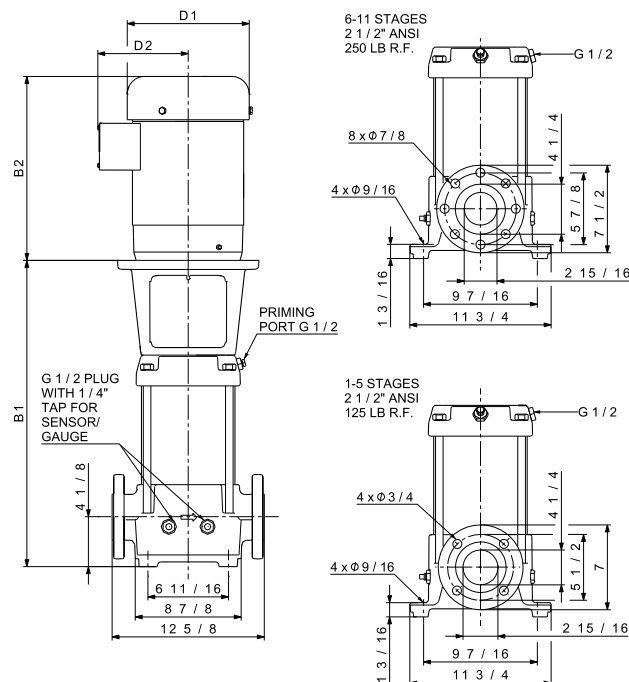

TM02 7699 1009

Pump type	P2 [hp]	Ph.	ANSI dimensions [inch]						Ship Wt. [lbs.]	ANSI dimensions [inch]			Ship Wt. [lbs.]	
			B1	TEFC			ODP			MLE				
				D1	D2	B1+B2	D1	D2		B1+B2	D1	D2		B1+B2
CR(E) 32-1-1	5	1	20.08	10.62	7.46	35.60	-	-	-	240	-	-	-	-
		3	19.88	8.66	5.28	35.39	-	-	-	218	-	-	-	-
CR(E) 32-1	5	1	20.08	10.62	7.46	35.60	-	-	-	228	-	-	-	-
		3	19.88	8.66	5.28	35.39	-	-	-	218	8.66	7.40	35.39	210
CR 32-2-2	7 1/2	1	22.83	10.22	7.62	38.36	-	-	-	245	-	-	-	-
		3	22.64	8.66	5.28	38.15	-	-	-	229	-	-	-	-
CR 32-2-1	7 1/2	1	22.83	10.22	7.62	38.36	-	-	-	245	-	-	-	-
		3	22.64	8.66	5.28	38.15	-	-	-	229	8.66	7.40	38.15	242
CR(E) 32-2	10	1	22.83	10.23	10.30	38.90	-	-	-	300	-	-	-	-
		3	22.64	8.66	5.28	38.15	-	-	-	229	-	-	-	-
CR(E) 32-3-2	10	1	25.59	10.23	10.30	41.66	-	-	-	295	-	-	-	-
		3	25.39	8.66	5.28	40.90	-	-	-	236	10.24	8.39	40.31	256
CR 32-3	15	3	29.72	10.22	8.67	46.30	10.62	7.33	46.03	361	-	-	-	-
CR 32-4-2	15	3	32.48	10.22	8.67	49.06	10.62	7.33	48.79	368	-	-	-	-
CR 32-4	20	3	32.48	10.22	8.67	49.06	11.50	8.92	52.17	373	-	-	-	-
CR 32-5-2	20	3	35.24	10.22	8.67	51.82	11.50	8.92	54.93	380	-	-	-	-
CR 32-5	20	3	35.24	10.22	8.67	51.82	11.50	8.92	54.93	380	-	-	-	-
CR 32-6-2	25	3	37.99	12.94	11.52	57.81	11.50	8.94	58.80	434	-	-	-	-
CR 32-6	25	3	37.99	12.94	11.52	57.81	11.50	8.94	58.80	434	-	-	-	-
CR 32-7-2	30	3	40.75	15.32	13.11	63.94	11.50	8.94	62.56	623	-	-	-	-
CR 32-7	30	3	40.75	15.32	13.11	63.94	11.50	8.94	62.56	602	-	-	-	-
CR 32-8-2	30	3	43.5	15.32	13.11	66.69	11.50	8.94	65.31	615	-	-	-	-
CR 32-8	40	3	43.5	15.32	13.11	66.69	13.25	12.21	66.75	631	-	-	-	-
CR 32-9-2	40	3	46.26	15.32	13.11	69.45	13.25	12.21	69.51	637	-	-	-	-
CR 32-9	40	3	46.26	15.32	13.11	69.45	13.25	12.21	69.51	637	-	-	-	-
CR 32-10-2	40	3	49.02	15.32	13.11	72.21	13.25	12.21	72.27	645	-	-	-	-
CR 32-10	40	3	49.02	15.32	13.11	72.21	13.25	12.21	72.27	645	-	-	-	-
CR 32-11-2	50	3	51.77	16.88	14.12	79.58	13.25	12.21	74.52	671	-	-	-	-

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights).
All dimensions in inches unless otherwise noted.

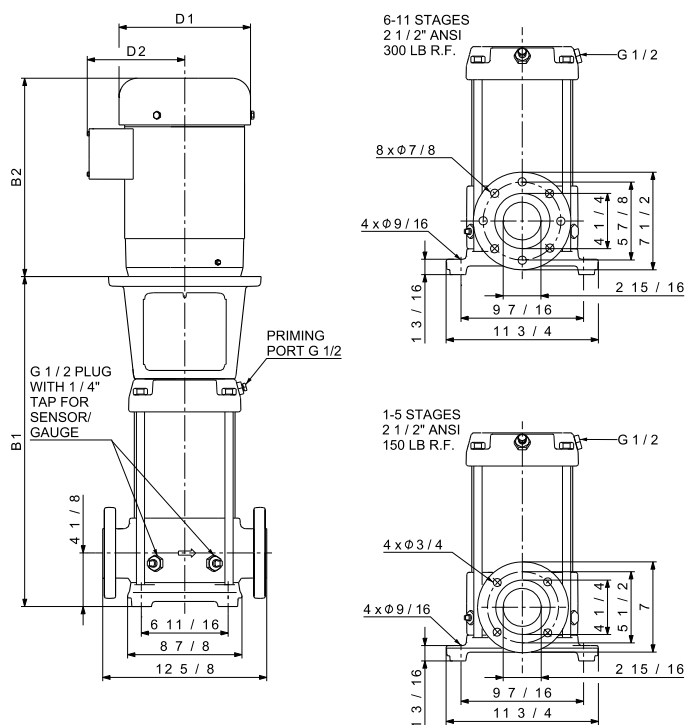


TM02 7703 1009


Pump type	P2 [hp]	Ph.	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE				
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CRN(E) 32-1-1	5	1	20.08	10.62	7.46	35.60	-	-	-	245	-	-	-	-	
		3	19.88	8.66	5.28	35.39	-	-	-	223	-	-	-	-	
CRN(E) 32-1	5	1	20.08	10.62	7.46	35.60	-	-	-	233	-	-	-	-	
		3	19.88	8.66	5.28	35.39	-	-	-	223	8.66	7.40	35.39	214	
CRN 32-2-2	7 1/2	1	22.83	10.22	7.62	38.36	-	-	-	250	-	-	-	-	
		3	22.64	8.66	5.28	38.15	-	-	-	234	-	-	-	-	
CRN 32-2-1	7 1/2	1	22.83	10.22	7.62	38.36	-	-	-	250	-	-	-	-	
		3	22.64	8.66	5.28	38.15	-	-	-	234	8.66	7.40	38.15	247	
CRN(E) 32-2	10	1	22.83	10.23	10.30	38.90	-	-	-	305	-	-	-	-	
		3	22.64	8.66	5.28	38.15	-	-	-	234	-	-	-	-	
CRN(E) 32-3-2	10	1	25.59	10.23	10.30	41.66	-	-	-	300	-	-	-	-	
		3	25.39	8.66	5.28	40.90	-	-	-	241	10.24	8.39	40.31	259	
CRN 32-3	15	3	29.72	10.22	8.67	46.30	10.62	7.33	46.03	366	-	-	-		
CRN 32-4-2	15	3	32.48	10.22	8.67	49.06	10.62	7.33	48.79	372	-	-	-		
CRN 32-4	20	3	32.48	10.22	8.67	49.06	11.50	8.92	52.17	377	-	-	-		
CRN 32-5-2	20	3	35.24	10.22	8.67	51.82	11.50	8.92	54.93	384	-	-	-		
CRN 32-5	20	3	35.24	10.22	8.67	51.82	11.50	8.92	54.93	384	-	-	-		
CRN 32-6-2	25	3	37.99	12.94	11.52	57.81	11.50	8.94	58.80	438	-	-	-		
CRN 32-6	25	3	37.99	12.94	11.52	57.81	11.50	8.94	58.80	438	-	-	-		
CRN 32-7-2	30	3	40.75	15.32	13.11	63.94	11.50	8.94	62.56	627	-	-	-		
CRN 32-7	30	3	40.75	15.32	13.11	63.94	11.50	8.94	62.56	606	-	-	-		
CRN 32-8-2	30	3	43.5	15.32	13.11	66.69	11.50	8.94	65.31	619	-	-	-		
CRN 32-8	40	3	43.5	15.32	13.11	66.69	13.25	12.21	66.75	635	-	-	-		
CRN 32-9-2	40	3	46.26	15.32	13.11	69.45	13.25	12.21	69.51	641	-	-	-		
CRN 32-9	40	3	46.26	15.32	13.11	69.45	13.25	12.21	69.51	641	-	-	-		
CRN 32-10-2	40	3	49.02	15.32	13.11	72.21	13.25	12.21	72.27	648	-	-	-		
CRN 32-10	40	3	49.02	15.32	13.11	72.21	13.25	12.21	72.27	648	-	-	-		
CRN 32-11-2	50	3	51.77	16.88	14.12	79.58	13.25	12.21	74.52	674	-	-	-		

1) Weights are based on pump with TEFC motor (see price list for individual weights)
All dimensions in inches unless otherwise noted.

CR(E), CRN(E) 45

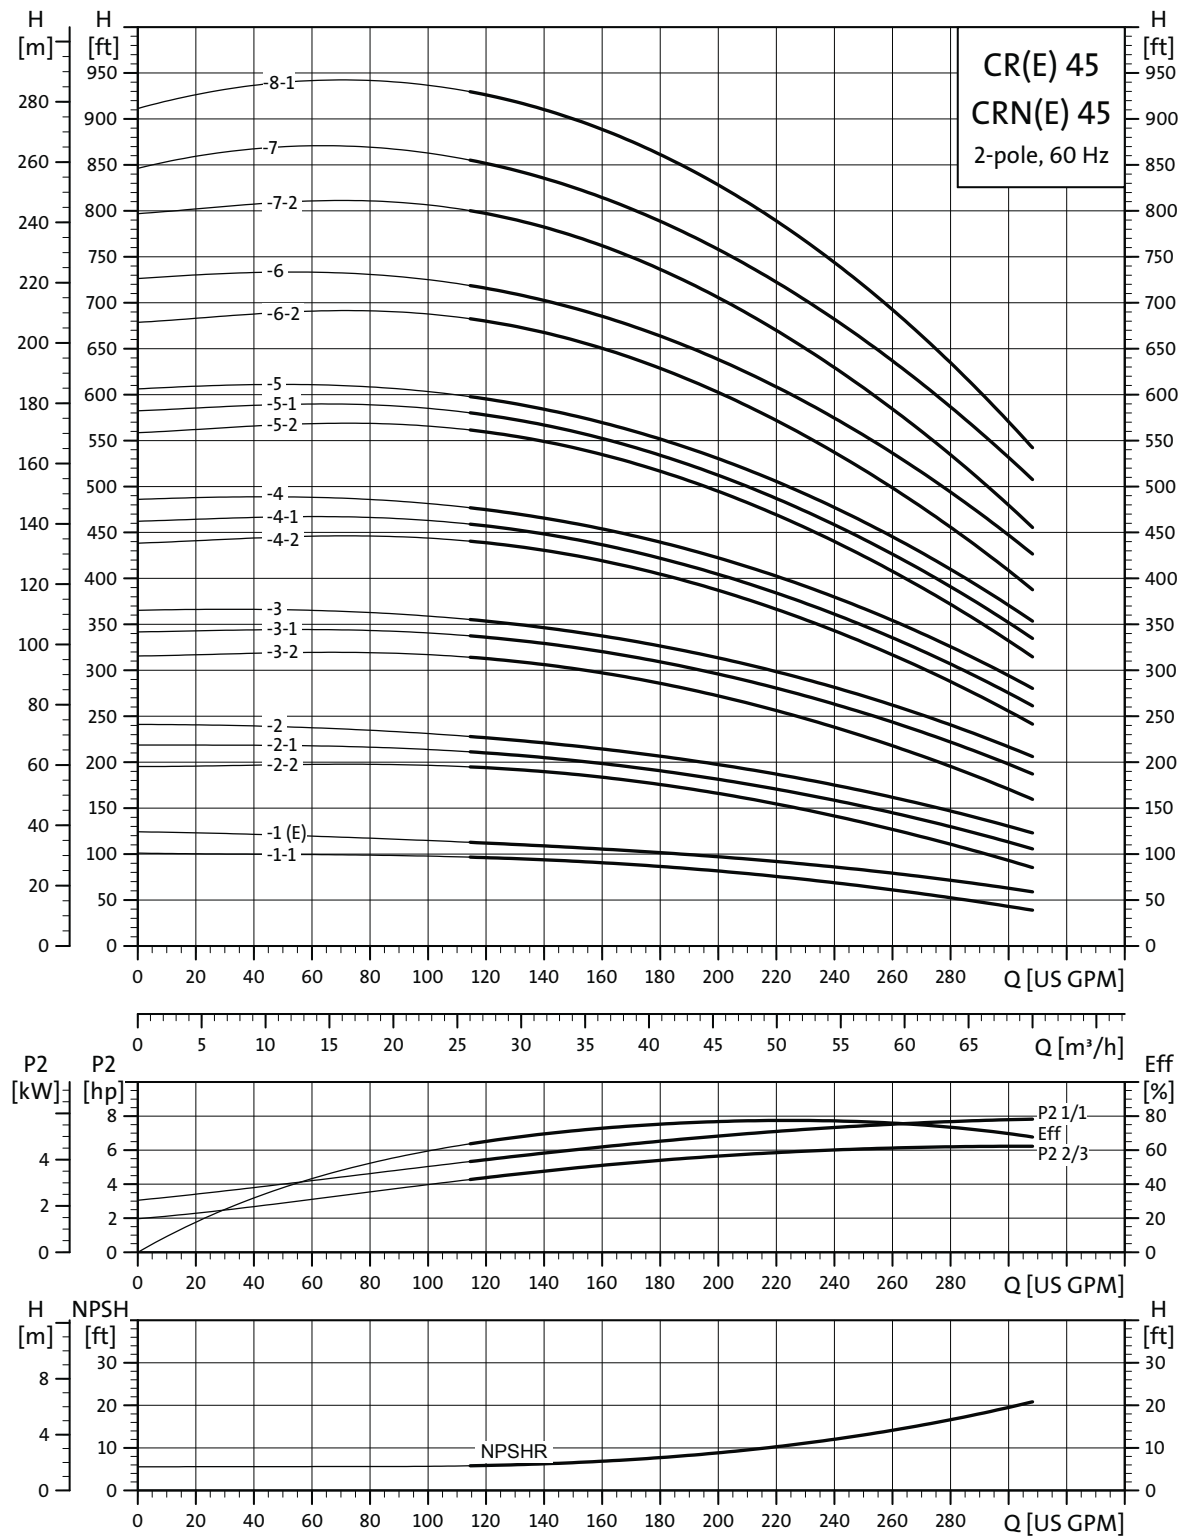


TM02 0040 1303

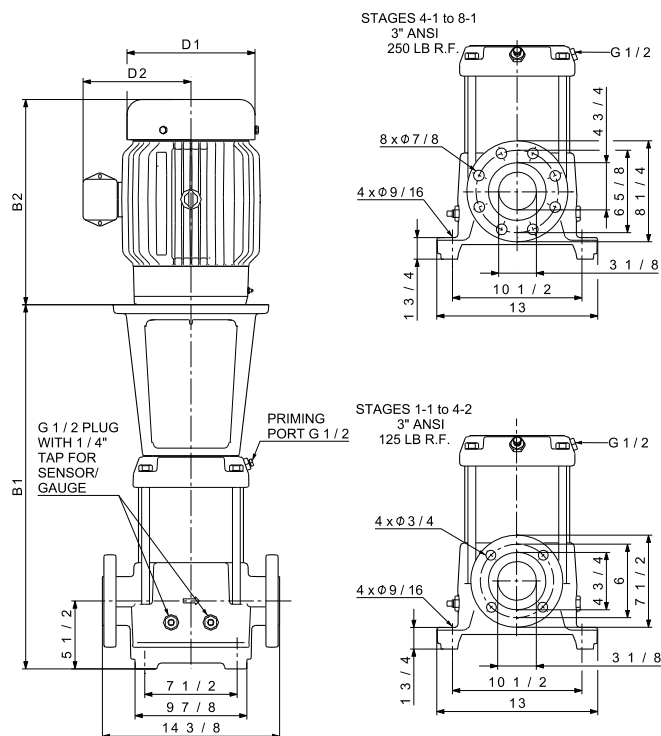

TM02 7700 1009

Pump type	P2 [hp]	Ph.	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE				
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CR 45-1-1	7 1/2	1	22.20	10.22	7.62	37.73	-	-	-	259	-	-	-	-	
		3	22.01	8.66	5.28	37.52	-	-	-	243	8.66	7.40	37.52	256	
CR(E) 45-1	10	1	22.20	10.23	10.30	38.27	-	-	-	314	-	-	-	-	
		3	22.01	8.66	5.28	37.52	-	-	-	243	10.24	8.39	36.93	265	
CR 45-2-2	15	3	29.49	10.22	8.67	46.07	10.62	7.33	45.80	376	-	-	-	-	
CR 45-2-1	15	3	29.49	10.22	8.67	46.07	10.62	7.33	45.80	376	-	-	-	-	
CR 45-2	15	3	29.49	10.22	8.67	46.07	10.62	7.33	45.80	376	-	-	-	-	
CR 45-3-2	20	3	32.64	10.22	8.67	49.22	11.50	8.92	52.33	390	-	-	-	-	
CR 45-3-1	25	3	32.64	12.94	11.52	52.46	11.50	8.94	53.45	436	-	-	-	-	
CR 45-3	25	3	32.64	12.94	11.52	52.46	11.50	8.94	53.45	436	-	-	-	-	
CR 45-4-2	30	3	35.79	15.32	13.11	58.98	11.50	8.94	57.60	605	-	-	-	-	
CR 45-4-1	30	3	35.79	15.32	13.11	58.98	11.50	8.94	57.60	611	-	-	-	-	
CR 45-4	30	3	35.79	15.32	13.11	58.98	11.50	8.94	57.60	611	-	-	-	-	
CR 45-5-2	40	3	38.94	15.32	13.11	62.13	13.25	12.21	62.19	634	-	-	-	-	
CR 45-5-1	40	3	38.94	15.32	13.11	62.13	13.25	12.21	62.19	634	-	-	-	-	
CR 45-5	40	3	38.94	15.32	13.11	62.13	13.25	12.21	62.19	634	-	-	-	-	
CR 45-6-2	50	3	42.09	16.88	14.12	69.90	13.25	12.21	64.84	679	-	-	-	-	
CR 45-6	50	3	42.09	16.88	14.12	69.90	13.25	12.21	64.84	679	-	-	-	-	
CR 45-7-2	50	3	45.24	16.88	14.12	73.05	13.25	12.21	67.99	689	-	-	-	-	
CR 45-7	60	3	45.24	19.00	14.90	76.03	15.12	13.19	71.37	869	-	-	-	-	
CR 45-8-1	60	3	48.39	19.00	14.90	79.18	15.12	13.19	74.52	878	-	-	-	-	

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights)
All dimensions in inches unless otherwise noted.

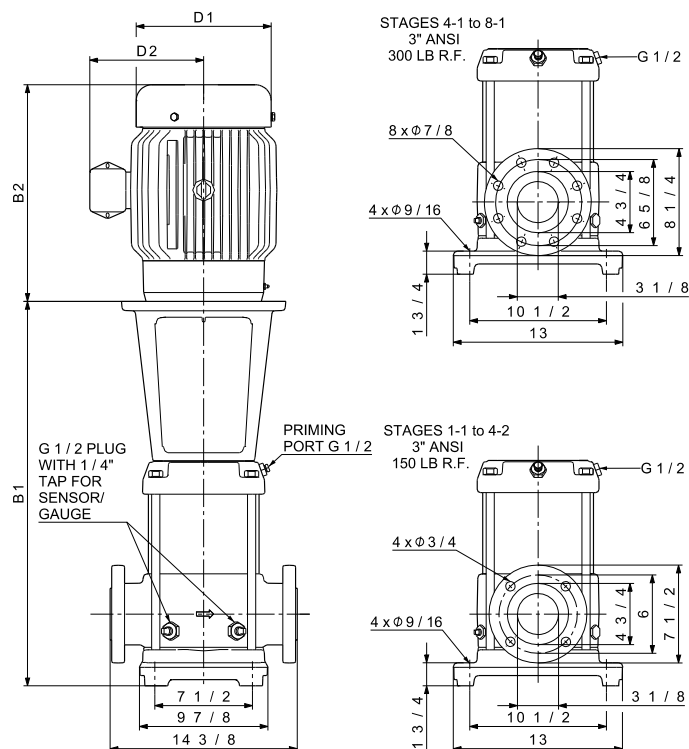


TM02 7704 1009


Pump type	P2 [hp]	Ph.	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]			Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE			
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2	
CRN 45-1-1	7 1/2	1	22.20	10.22	7.62	37.73	-	-	-	259	-	-	-	-
		3	22.01	8.66	5.28	37.52	-	-	-	243	220.00	188.00	37.52	256
CRN(E) 45-1	10	1	22.20	10.23	10.30	38.27	-	-	-	314	-	-	-	-
		3	22.01	8.66	5.28	37.52	-	-	-	243	260.00	213.00	36.93	265
CRN 45-2-2	15	3	29.49	10.22	8.67	46.07	10.62	7.33	45.80	376	-	-	-	-
CRN 45-2-1	15	3	29.49	10.22	8.67	46.07	10.62	7.33	45.80	376	-	-	-	-
CRN 45-2	15	3	29.49	10.22	8.67	46.07	10.62	7.33	45.80	376	-	-	-	-
CRN 45-3-2	20	3	32.64	10.22	8.67	49.22	11.50	8.92	52.33	390	-	-	-	-
CRN 45-3-1	25	3	32.64	12.94	11.52	52.46	11.50	8.94	53.45	436	-	-	-	-
CRN 45-3	25	3	32.64	12.94	11.52	52.46	11.50	8.94	53.45	436	-	-	-	-
CRN 45-4-2	30	3	35.79	15.32	13.11	58.98	11.50	8.94	57.60	606	-	-	-	-
CRN 45-4-1	30	3	35.79	15.32	13.11	58.98	11.50	8.94	57.60	609	-	-	-	-
CRN 45-4	30	3	35.79	15.32	13.11	58.98	11.50	8.94	57.60	609	-	-	-	-
CRN 45-5-2	40	3	38.94	15.32	13.11	62.13	13.25	12.21	62.19	632	-	-	-	-
CRN 45-5-1	40	3	38.94	15.32	13.11	62.13	13.25	12.21	62.19	632	-	-	-	-
CRN 45-5	40	3	38.94	15.32	13.11	62.13	13.25	12.21	62.19	632	-	-	-	-
CRN 45-6-2	50	3	42.09	16.88	14.12	69.90	13.25	12.21	64.84	677	-	-	-	-
CRN 45-6	50	3	42.09	16.88	14.12	69.90	13.25	12.21	64.84	677	-	-	-	-
CRN 45-7-2	50	3	45.24	16.88	14.12	73.05	13.25	12.21	67.99	687	-	-	-	-
CRN 45-7	60	3	45.24	19.00	14.90	76.03	15.12	13.19	71.37	867	-	-	-	-
CRN 45-8-1	60	3	48.39	19.00	14.90	79.18	15.12	13.19	74.52	876	-	-	-	-

1) Weights are based on pump with TEFC motor (see price list for individual weights)
All dimensions in inches unless otherwise noted.

CR(E), CRN(E) 64

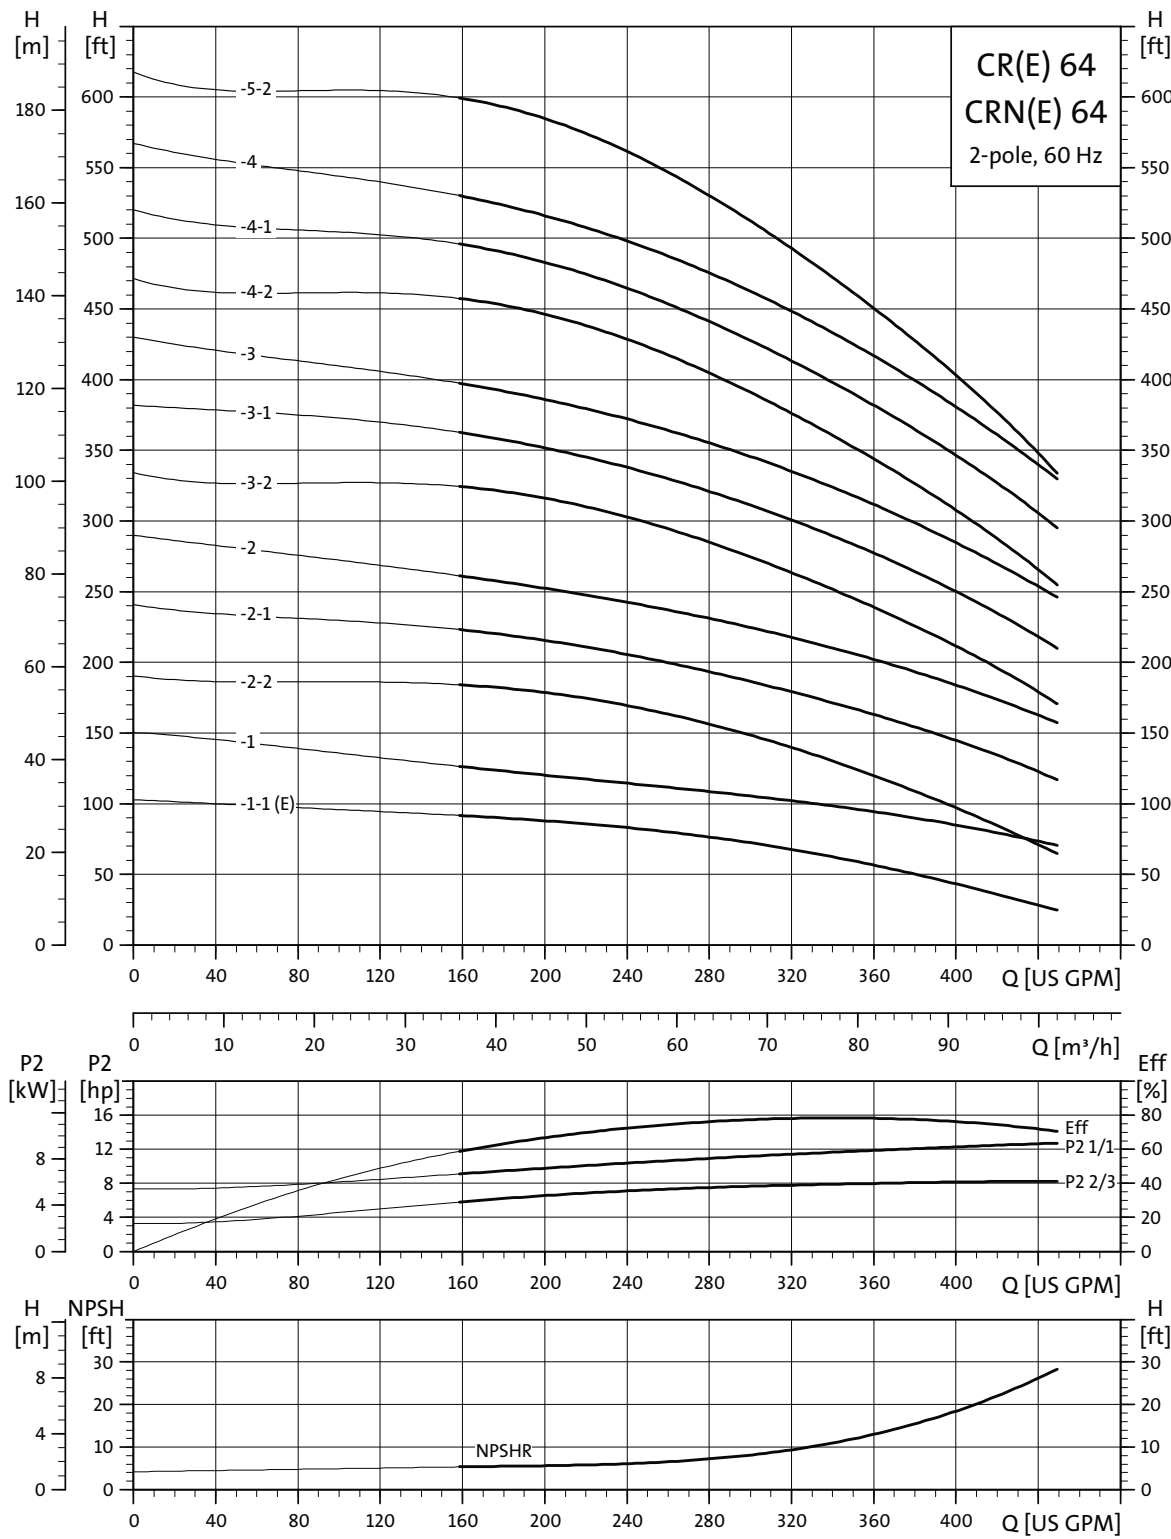

TM02 0041 3804

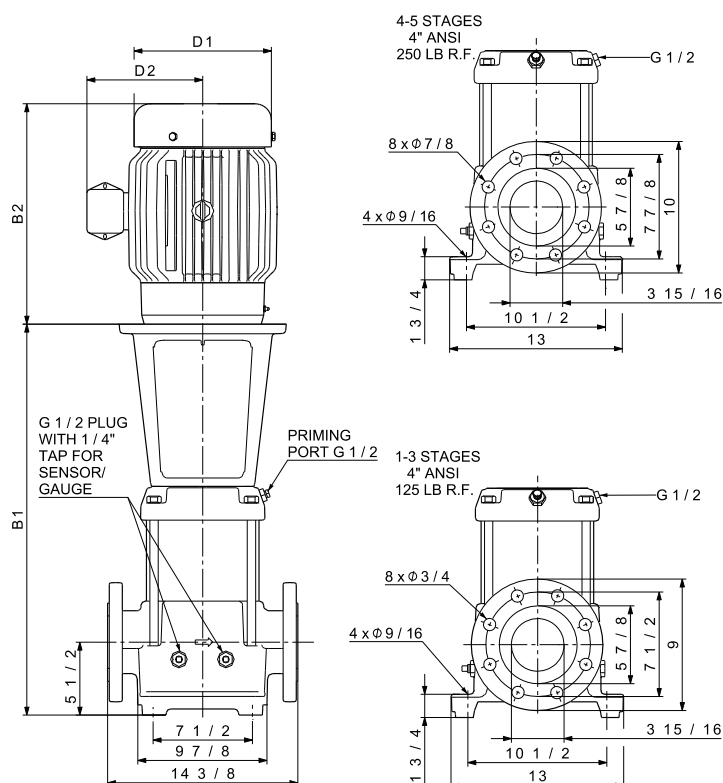


TM02 7701 1009

Pump type	P2 [hp]	Ph.	Dimensions [inch]							Ship Wt. [lbs.]	Dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE				
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CR(E) 64-1-1	10	1	22.09	10.23	10.30	38.16	-	-	-	268	-	-	-	-	
		3	22.09	8.66	5.28	37.60	-	-	-	252	10.24	8.39	37.01	274	
CR 64-1	15	3	26.42	10.22	8.67	43.00	10.62	7.33	42.73	377	-	-	-	-	
CR 64-2-2	20	3	29.69	10.22	8.67	46.27	11.50	8.92	49.38	392	-	-	-	-	
CR 64-2-1	20	3	29.69	10.22	8.67	46.27	11.50	8.92	49.38	392	-	-	-	-	
CR 64-2	25	3	29.69	12.94	11.52	49.51	11.50	8.94	50.50	438	-	-	-	-	
CR 64-3-2	30	3	32.91	15.32	13.11	56.10	11.50	8.94	54.72	609	-	-	-	-	
CR 64-3-1	40	3	32.91	15.32	13.11	56.10	13.25	12.21	56.16	624	-	-	-	-	
CR 64-3	40	3	32.91	15.32	13.11	56.10	13.25	12.21	56.16	624	-	-	-	-	
CR 64-4-2	40	3	36.18	15.32	13.11	59.37	13.25	12.21	59.43	624	-	-	-	-	
CR 64-4-1	50	3	36.18	16.88	14.12	63.99	13.25	12.21	58.93	676	-	-	-	-	
CR 64-4	50	3	36.18	16.88	14.12	63.99	13.25	12.21	58.93	676	-	-	-	-	
CR 64-5-2	60	3	39.41	19.00	14.90	70.20	15.12	13.19	65.54	866	-	-	-	-	

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights)
All dimensions in inches unless otherwise noted.

Dimensional sketches

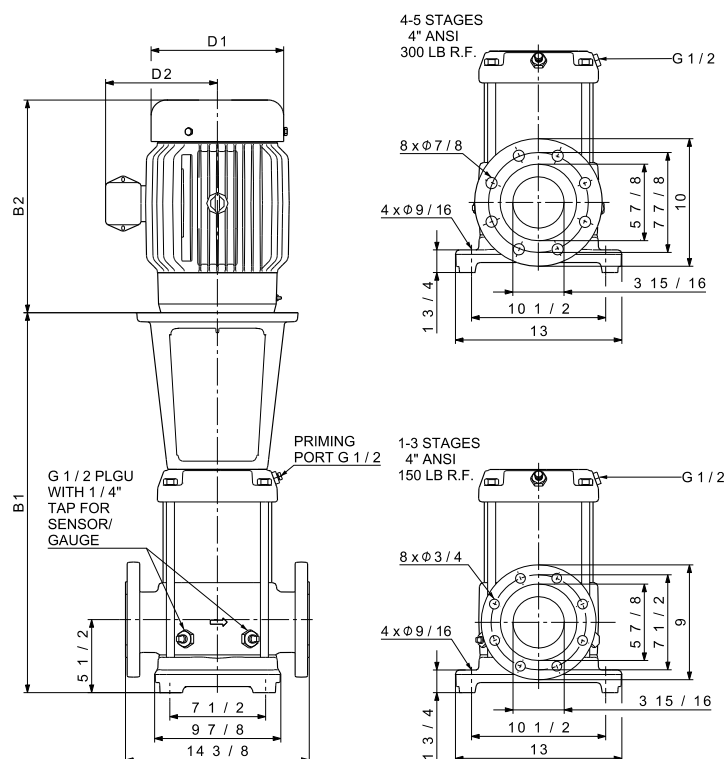


TM02 7705 1009

Dimensions and weights


Pump type	P2 [hp]	Ph.	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE				
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CRN(E) 64-1-1	10	1	22.09	10.23	10.30	38.16	-	-	-	269	-	-	-	-	
		3	22.09	8.66	5.28	37.60	-	-	-	253	10.24	8.39	37.01	275	
CRN 64-1	15	3	26.42	10.22	8.67	43.00	10.62	7.33	42.73	378	-	-	-	-	
CRN 64-2-2	20	3	29.69	10.22	8.67	46.27	11.50	8.92	49.38	393	-	-	-	-	
CRN 64-2-1	20	3	29.69	10.22	8.67	46.27	11.50	8.92	49.38	393	-	-	-	-	
CRN 64-2	25	3	29.69	12.94	11.52	49.51	11.50	8.94	50.50	440	-	-	-	-	
CRN 64-3-2	30	3	32.91	15.32	13.11	56.10	11.50	8.94	54.72	611	-	-	-	-	
CRN 64-3-1	40	3	32.91	15.32	13.11	56.10	13.25	12.21	56.16	625	-	-	-	-	
CRN 64-3	40	3	32.91	15.32	13.11	56.10	13.25	12.21	56.16	625	-	-	-	-	
CRN 64-4-2	40	3	36.18	15.32	13.11	59.37	13.25	12.21	59.43	625	-	-	-	-	
CRN 64-4-1	50	3	36.18	16.88	14.12	63.99	13.25	12.21	58.93	678	-	-	-	-	
CRN 64-4	50	3	36.18	16.88	14.12	63.99	13.25	12.21	58.93	678	-	-	-	-	
CRN 64-5-2	60	3	39.41	19.00	14.90	70.20	15.12	13.19	65.54	868	-	-	-	-	

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights)
All dimensions in inches unless otherwise noted.

CR, CRN 90

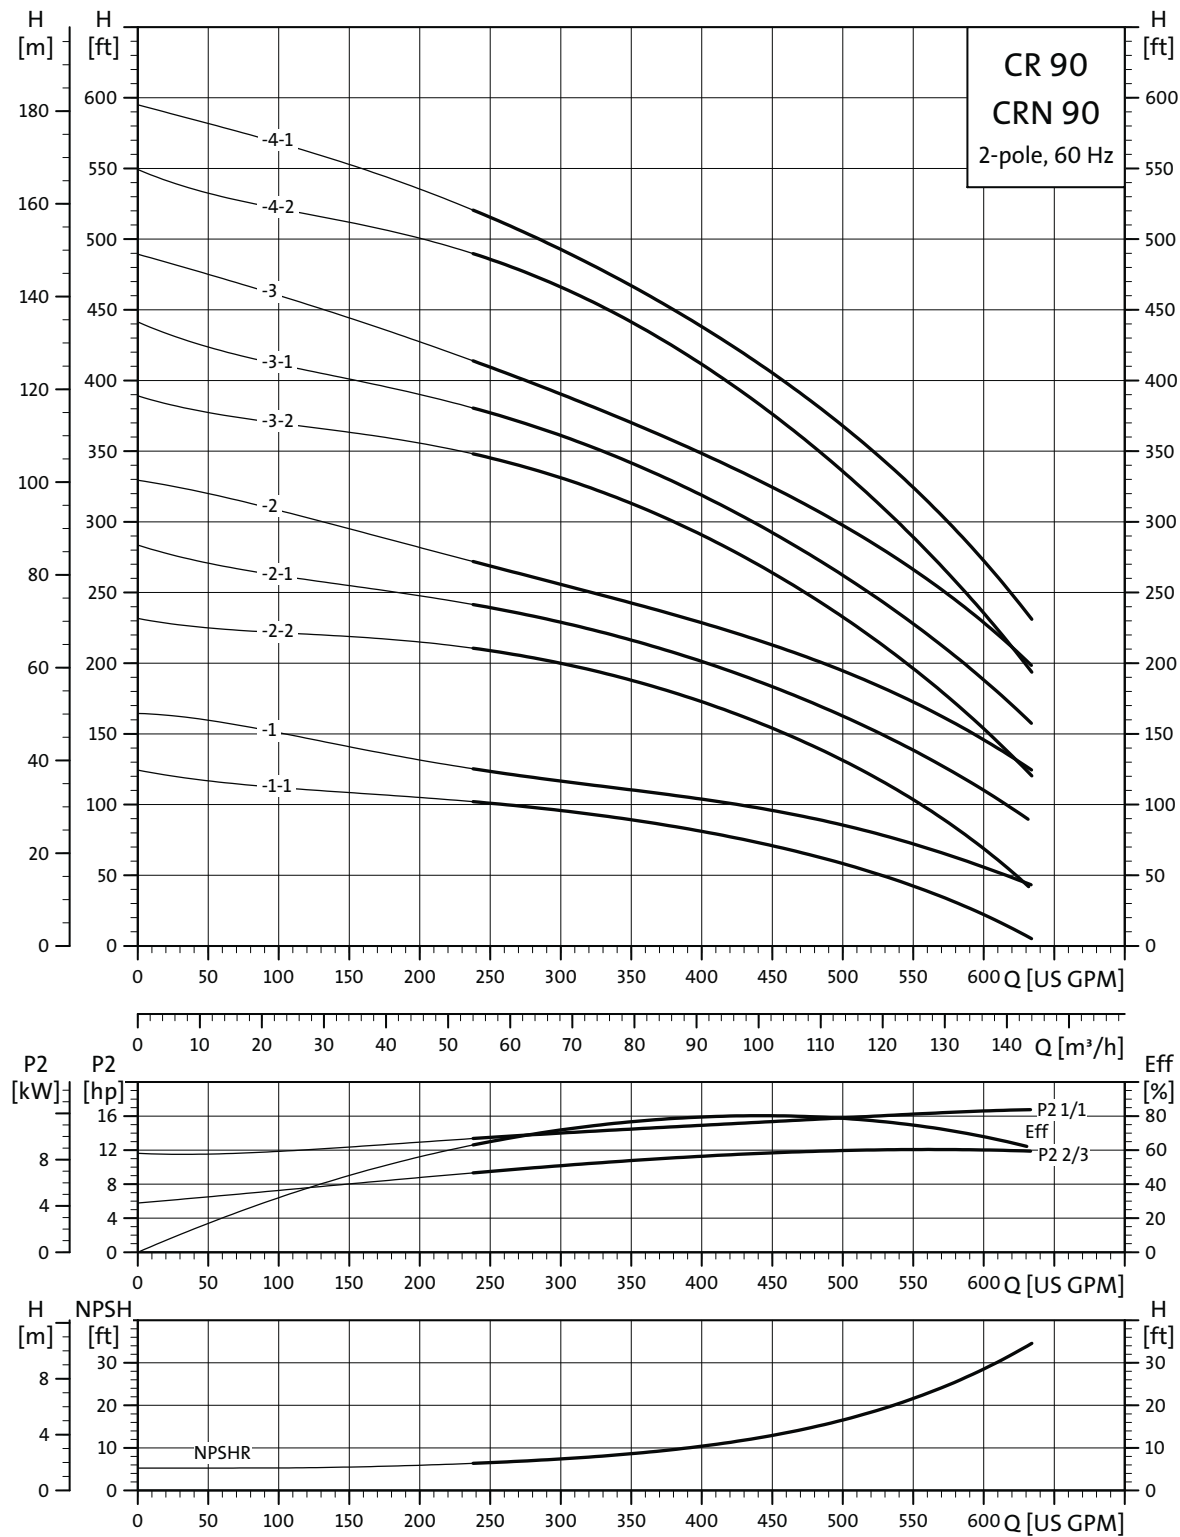


TM02 0042 1303

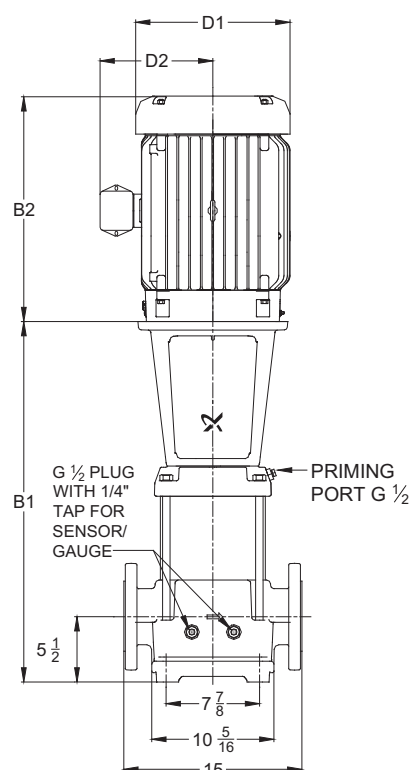


4-5 STAGES

4" ANSI
250 LB R.F.

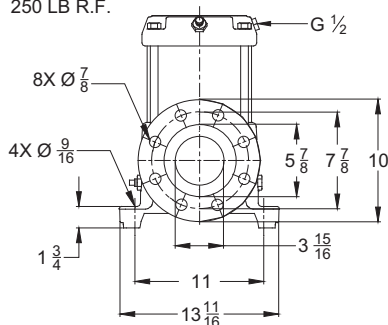

1-3 STAGES


4" ANSI
125 LB R.F.

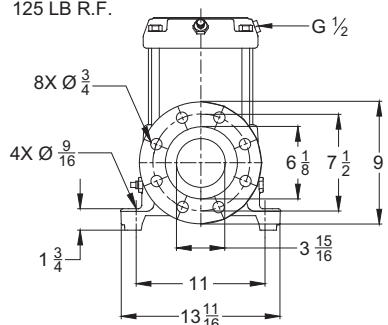

TM02 7702 3804

Pump type	P2 [hp]	Ph.	ANSI dimensions [inch]							Ship Wt. [lbs.]	ANSI dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE				
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CR 90-1-1	15	3	26.81	10.22	8.67	43.39	10.62	7.33	43.12	387	-	-	-	-	
CR 90-1	20	3	26.81	10.22	8.67	43.39	11.50	8.92	46.50	392	-	-	-	-	
CR 90-2-2	25	3	30.43	12.94	11.52	50.25	11.50	8.94	51.24	450	-	-	-	-	
CR 90-2-1	30	3	30.43	15.32	13.11	53.62	11.50	8.94	52.24	611	-	-	-	-	
CR 90-2	40	3	30.43	15.32	13.11	53.62	13.25	12.21	53.68	625	-	-	-	-	
CR 90-3-2	40	3	34.06	15.32	13.11	57.25	13.25	12.21	57.31	636	-	-	-	-	
CR 90-3-1	50	3	34.06	16.88	14.12	61.87	13.25	12.21	56.81	667	-	-	-	-	
CR 90-3	50	3	34.06	16.88	14.12	61.87	13.25	12.21	56.81	667	-	-	-	-	
CR 90-4-2	60	3	37.68	19.00	14.90	68.47	15.12	13.19	63.81	869	-	-	-	-	
CR 90-4-1	60	3	37.68	19.00	14.90	68.47	15.12	13.19	63.81	869	-	-	-	-	

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights)
All dimensions in inches unless otherwise noted.

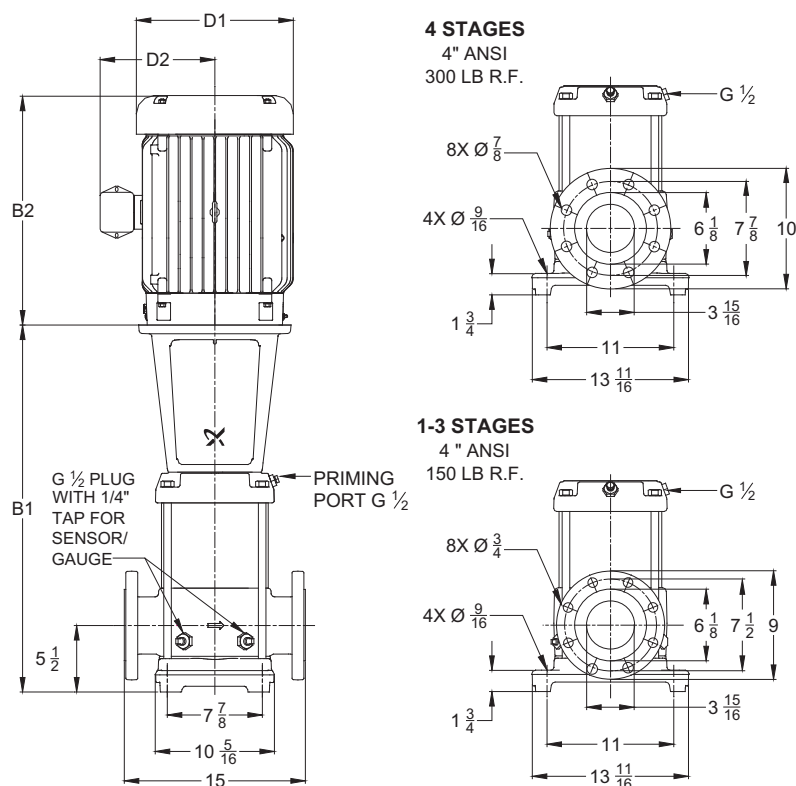


TM02 7706 3804


Pump type	P2 [hp]	Ph.	Dimensions [inch]							Ship Wt. [lbs.]	Dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE				
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CRN 90-1-1	15	3	26.81	10.22	8.67	43.39	10.62	7.33	43.12	393	-	-	-	-	
CRN 90-1	20	3	26.81	10.22	8.67	43.39	11.50	8.92	46.50	398	-	-	-	-	
CRN 90-2-2	25	3	30.43	12.94	11.52	50.25	11.50	8.94	51.24	455	-	-	-	-	
CRN 90-2-1	30	3	30.43	15.32	13.11	53.62	11.50	8.94	52.24	629	-	-	-	-	
CRN 90-2	40	3	30.43	15.32	13.11	53.62	13.25	12.21	53.68	631	-	-	-	-	
CRN 90-3-2	40	3	34.06	15.32	13.11	57.25	13.25	12.21	57.31	642	-	-	-	-	
CRN 90-3-1	50	3	34.06	16.88	14.12	61.87	13.25	12.21	56.81	668	-	-	-	-	
CRN 90-3	50	3	34.06	16.88	14.12	61.87	13.25	12.21	56.81	672	-	-	-	-	
CRN 90-4-2	60	3	37.68	19.00	14.90	68.47	15.12	13.19	63.81	876	-	-	-	-	
CRN 90-4-1	60	3	37.68	19.00	14.90	68.47	15.12	13.19	63.81	876	-	-	-	-	

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights)
All dimensions in inches unless otherwise noted.

CR, CRN 120

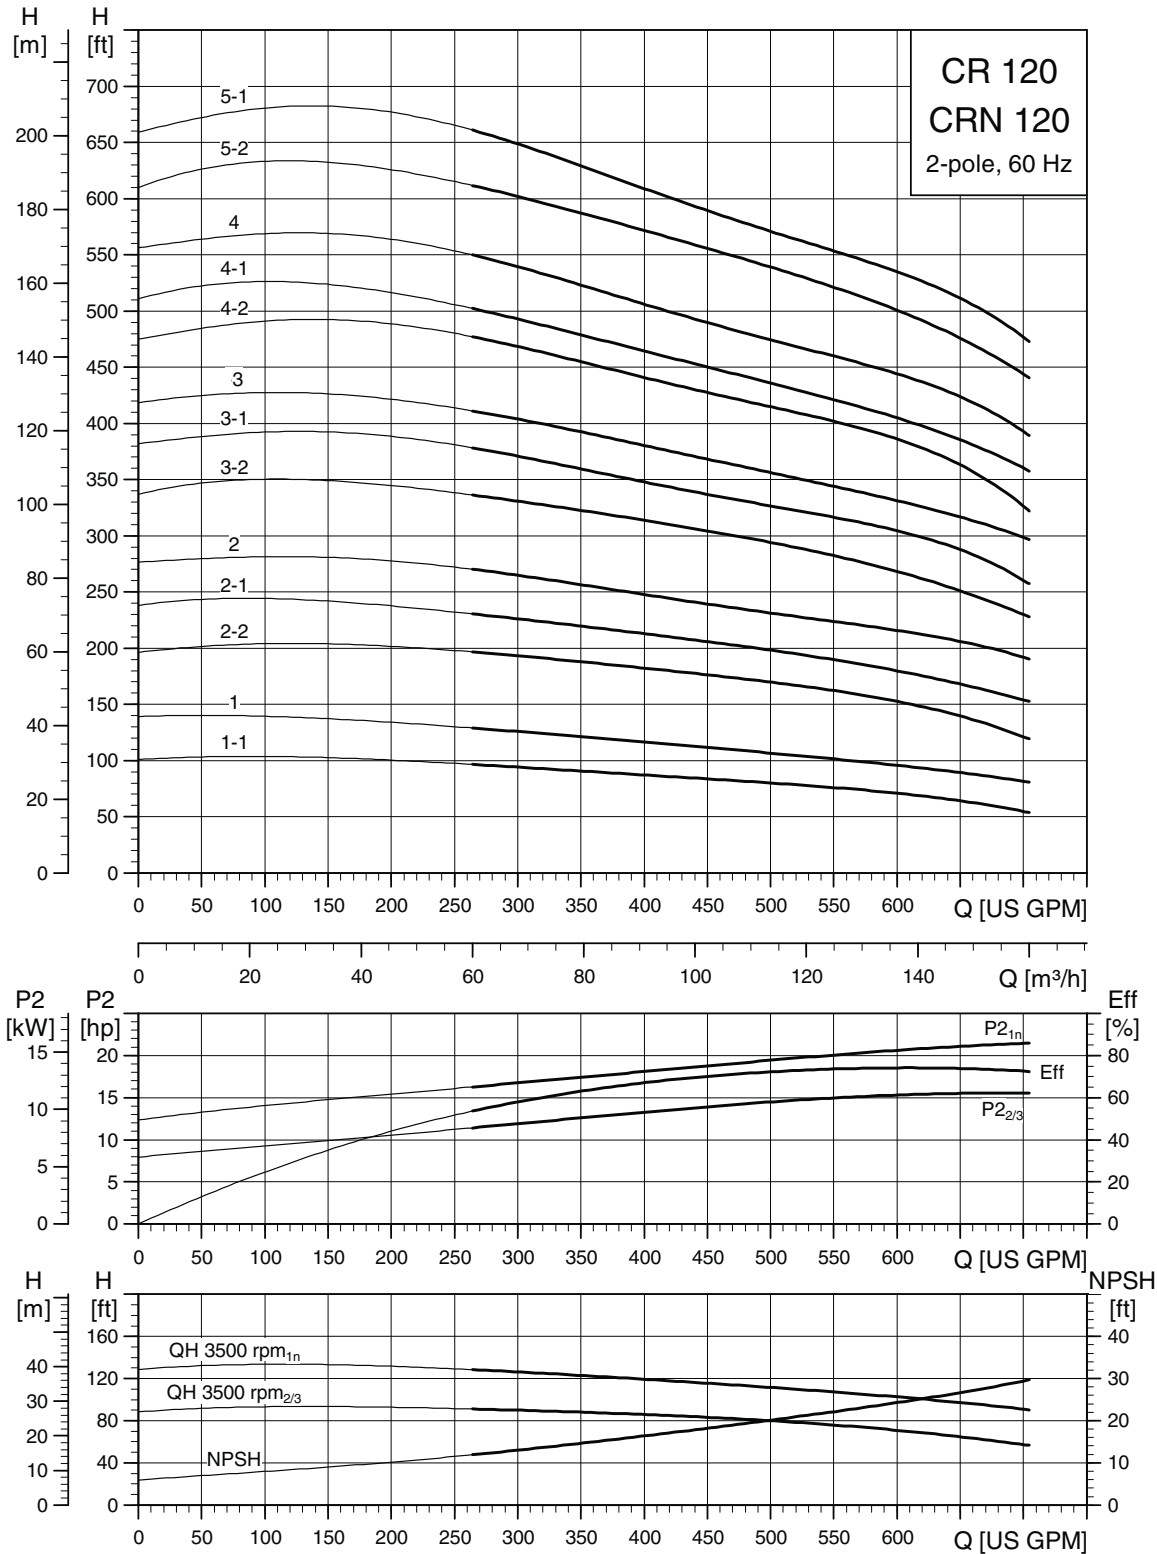

TM03 9192 0209

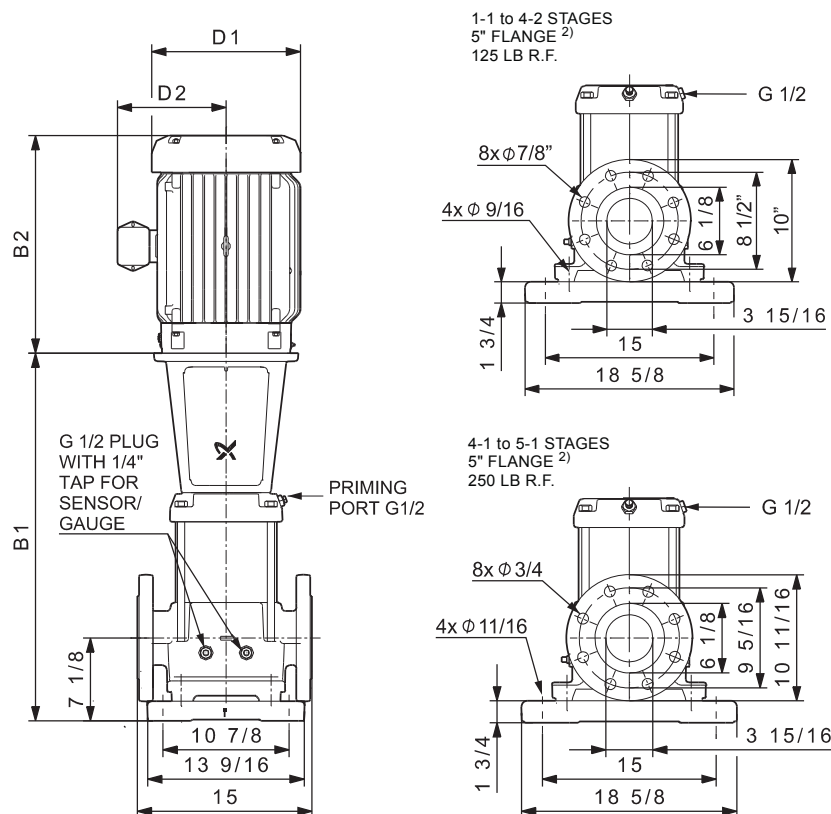


TM04 9630 4810

Pump type	P2 [hp]	Ph.	Dimensions [inch]							Ship Wt. [lbs.]	Dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE				
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CR 120-1-1	20	3	32.83	10.22	8.67	49.41	11.50	8.92	52.52	427	-	-	-	-	
CR 120-1	25	3	32.83	12.94	11.52	52.65	11.50	8.94	53.64	507	-	-	-	-	
CR 120-2-2	40	3	38.98	15.32	13.11	62.17	13.25	12.21	62.23	704	-	-	-	-	
CR 120-2-1	40	3	38.98	15.32	13.11	62.17	13.25	12.21	62.23	704	-	-	-	-	
CR 120-2	50	3	38.98	16.88	14.12	66.79	13.25	12.21	61.73	735	-	-	-	-	
CR 120-3-2	60	3	45.08	19.00	14.90	75.87	15.12	13.19	71.21	936	-	-	-	-	
CR 120-3-1	60	3	45.08	19.00	14.90	75.87	15.12	13.19	71.21	936	-	-	-	-	
CR 120-3	75	3	45.08	19.00	14.90	75.87	15.18	13.19	71.21	1045	-	-	-	-	
CR 120-4-2	75	3	51.69	19.00	14.90	82.48	15.18	13.19	77.82	1199	-	-	-	-	
CR 120-4-1	100	3	51.69	19.00	17.38	82.51	15.12	13.19	79.07	1468	-	-	-	-	
CR 120-4	100	3	51.69	19.00	17.38	82.51	15.12	13.19	79.07	1468	-	-	-	-	
CR 120-5-2	100	3	57.80	19.00	17.38	88.62	15.12	13.19	85.18	1490	-	-	-	-	

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights).

²⁾ CR 5" flange is not manufactured to ANSI specification. Gasket contact surface is approximately 0.25". CR 6" ANSI flange adapter is manufactured to ANSI B16.5 specification.

All dimensions in inches unless otherwise noted.

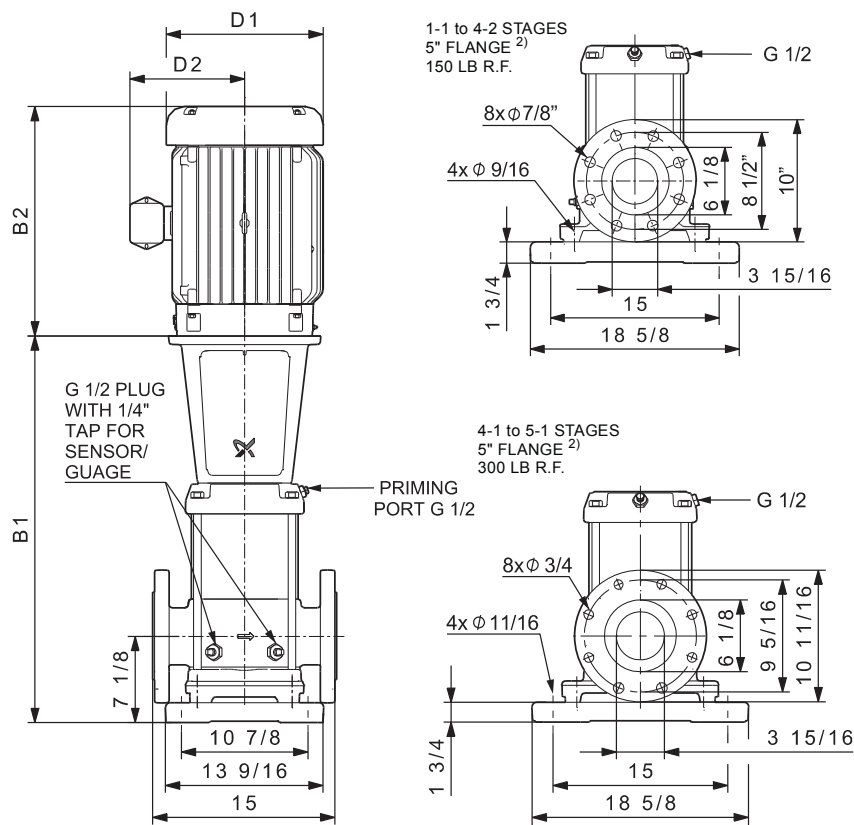

TMD4 9631 4810


Pump type	P2 [hp]	Ph.	Dimensions [inch]								Ship Wt. [lbs.]	Dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP			MLE						
				D1	D2	B1+B2	D1	D2	B1+B2							
CRN 120-1-1	20	3	32.83	10.22	8.67	49.41	11.50	8.92	52.52	434	-	-	-	-		
CRN 120-1	25	3	32.83	12.94	11.52	52.65	11.50	8.94	53.64	514	-	-	-	-		
CRN 120-2-2	40	3	38.98	15.32	13.11	62.17	13.25	12.21	62.23	711	-	-	-	-		
CRN 120-2-1	40	3	38.98	15.32	13.11	62.17	13.25	12.21	62.23	711	-	-	-	-		
CRN 120-2	50	3	38.98	16.88	14.12	66.79	13.25	12.21	61.73	742	-	-	-	-		
CRN 120-3-2	60	3	45.08	19.00	14.90	75.87	15.12	13.19	71.21	943	-	-	-	-		
CRN 120-3-1	60	3	45.08	19.00	14.90	75.87	15.12	13.19	71.21	943	-	-	-	-		
CRN 120-3	75	3	45.08	19.00	14.90	75.87	15.18	13.19	71.21	1052	-	-	-	-		
CRN 120-4-2	75	3	51.69	19.00	14.90	82.48	15.18	13.19	77.82	1206	-	-	-	-		
CRN 120-4-1	100	3	51.69	19.00	17.38	82.51	15.12	13.19	79.07	1475	-	-	-	-		
CRN 120-4	100	3	51.69	19.00	17.38	82.51	15.12	13.19	79.07	1475	-	-	-	-		
CRN 120-5-2	100	3	57.8	19.00	17.38	88.62	15.12	13.19	85.18	1497	-	-	-	-		

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights).


²⁾ CR 5" flange is not manufactured to ANSI specification. Gasket contact surface is approximately 0.25". CR 6" ANSI flange adapter is manufactured to ANSI B16.5 specification.

All dimensions in inches unless otherwise noted.

CR, CRN 150

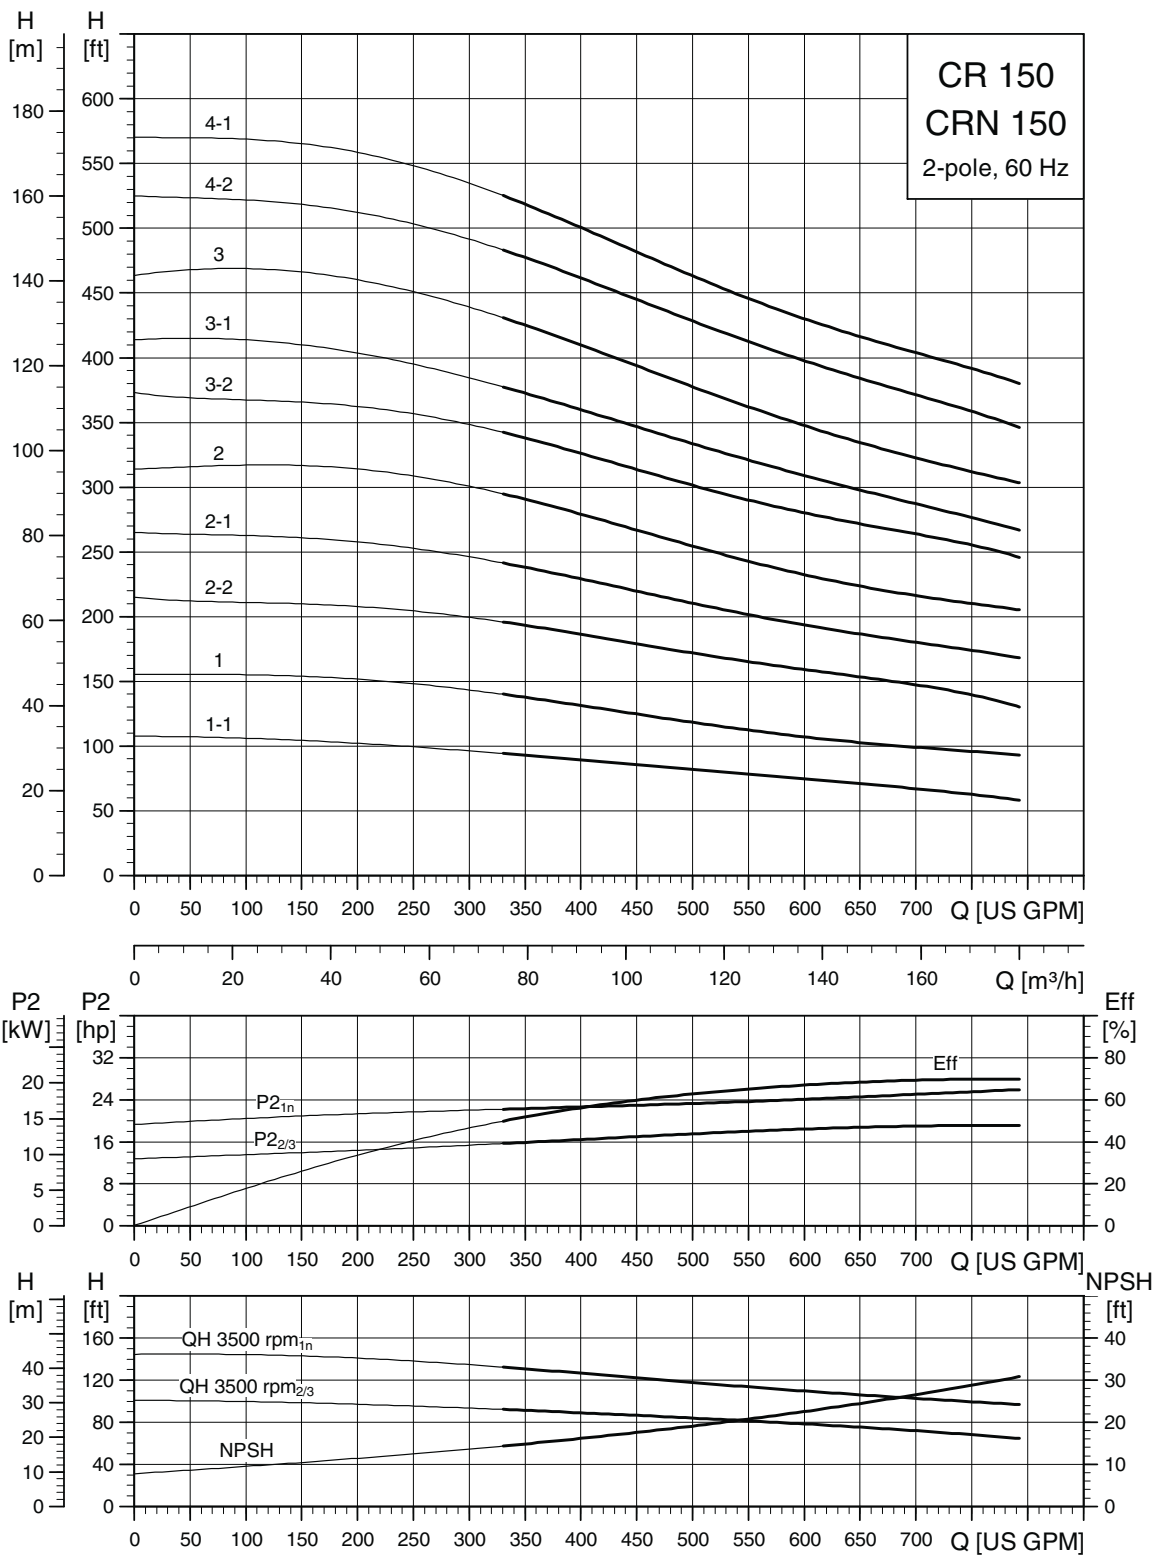

TM03 9193 0209

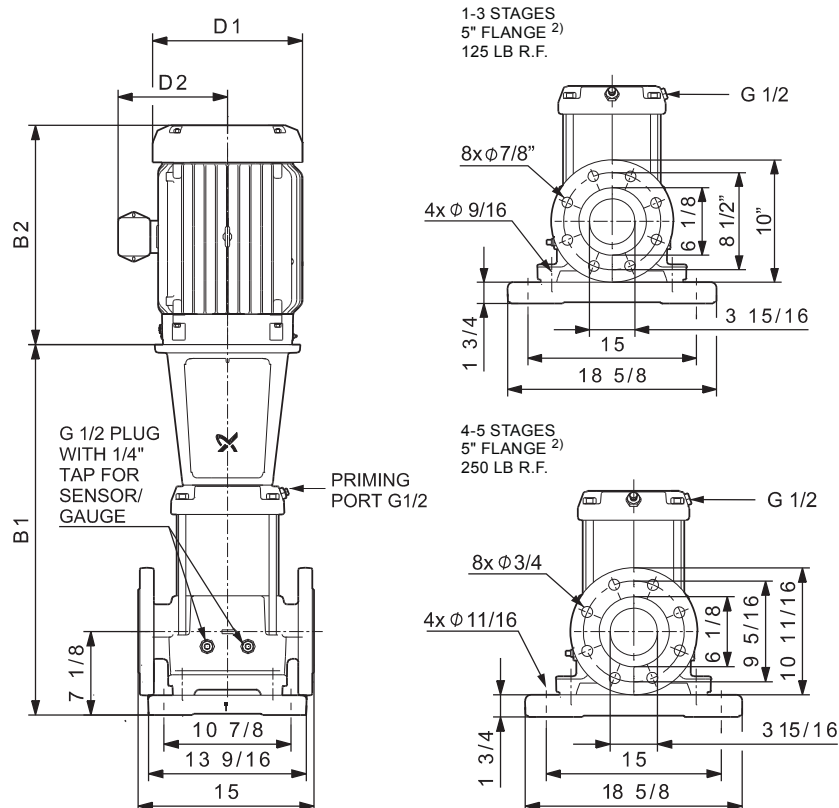


Pump type	P2 [hp]	Ph.	Dimensions [inch]								Ship Wt. ¹⁾ [lbs.]	Dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP			MLE						
				D1	D2	B1+B2	D1	D2	B1+B2	D1		D2	B1+B2			
CR 150-1-1	25	3	32.83	12.94	11.52	52.65	11.50	8.94	53.64	507	-	-	-	-		
CR 150-1	30	3	32.83	15.32	13.11	56.02	11.50	8.94	54.64	669	-	-	-	-		
CR 150-2-2	40	3	38.98	15.32	13.11	62.17	13.25	12.21	62.23	705	-	-	-	-		
CR 150-2-1	50	3	38.98	16.88	14.12	66.79	13.25	12.21	61.73	735	-	-	-	-		
CR 150-2	60	3	38.98	19.00	14.90	69.77	15.12	13.19	65.11	915	-	-	-	-		
CR 150-3-2	75	3	45.55	19.00	14.90	76.34	15.18	13.19	71.68	1178	-	-	-	-		
CR 150-3-1	75	3	45.55	19.00	14.90	76.34	15.18	13.19	71.68	1178	-	-	-	-		
CR 150-3	100	3	45.55	19.00	17.38	76.37	15.12	13.19	72.93	1215	-	-	-	-		
CR 150-4-2	100	3	51.69	19.00	17.38	82.51	15.12	13.19	79.07	1234	-	-	-	-		
CR 150-4-1	100	3	51.69	19.00	17.38	82.51	15.12	13.19	79.07	1234	-	-	-	-		

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights).

²⁾ CR 5" flange is not manufactured to ANSI specification. Gasket contact surface is approximately 0.25". CR 6" ANSI flange adapter is manufactured to ANSI B16.5 specification.

All dimensions in inches unless otherwise noted.

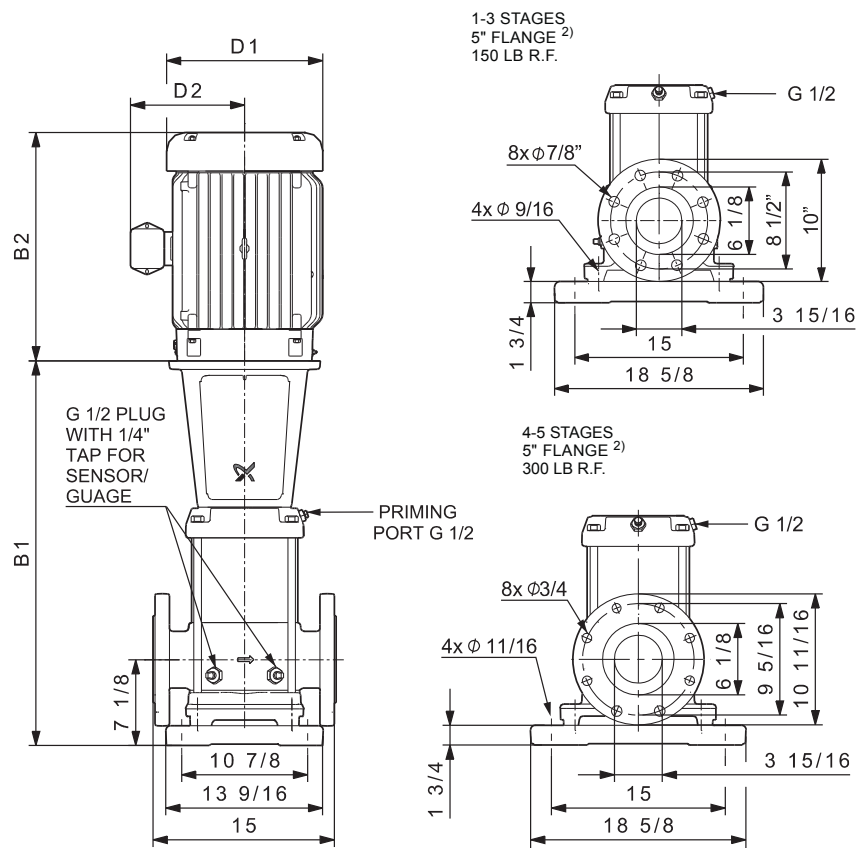

TM04 9633 4810

Pump type	P2 [hp]	Ph.	Dimensions [inch]							Ship Wt. ¹⁾ [lbs.]	Dimensions [inch]				Ship Wt. [lbs.]
			B1	TEFC			ODP				MLE				
				D1	D2	B1+B2	D1	D2	B1+B2		D1	D2	B1+B2		
CRN 150-1-1	25	3	32.83	12.94	11.52	52.65	11.50	8.94	53.64	514	-	-	-	-	
CRN 150-1	30	3	32.83	15.32	13.11	56.02	11.50	8.94	54.64	675	-	-	-	-	
CRN 150-2-2	40	3	38.98	15.32	13.11	62.17	13.25	12.21	62.23	711	-	-	-	-	
CRN 150-2-1	50	3	38.98	16.88	14.12	66.79	13.25	12.21	61.73	741	-	-	-	-	
CRN 150-2	60	3	38.98	19.00	14.90	69.77	15.12	13.19	65.11	922	-	-	-	-	
CRN 150-3-2	75	3	45.55	19.00	14.90	76.34	15.18	13.19	71.68	1184	-	-	-	-	
CRN 150-3-1	75	3	45.55	19.00	14.90	76.34	15.18	13.19	71.68	1184	-	-	-	-	
CRN 150-3	100	3	45.55	19.00	17.38	76.37	15.12	27.38	72.93	1222	-	-	-	-	
CRN 150-4-2	100	3	51.69	19.00	17.38	82.51	15.12	27.38	79.07	1243	-	-	-	-	
CRN 150-4-1	100	3	51.69	19.00	17.38	82.51	15.12	27.38	79.07	1243	-	-	-	-	

¹⁾ Weights are based on pump with TEFC motor (see price list for individual weights).

²⁾ CR 5" flange is not manufactured to ANSI specification. Gasket contact surface is approximately 0.25". CR 6" ANSI flange adapter is manufactured to ANSI B16.5 specification.

All dimensions in inches unless otherwise noted.

Standard motors in the CR range

Motors used in the CR pump range are:

- Grundfos ML or MLE motors
- Grundfos specified Baldor® motors

The information in the tables below applies to following motors type and size:

Type	Phase	Motor range [HP]	Cooling method
ML	3	1/3 - 10	TEFC
	1	1/3 - 10	TEFC
Baldor	3	15 - 100	TEFC
	3	15 - 100	ODP
MLE	1	1/2 - 1 1/2	TEFC
	3	1 - 10	TEFC

Grundfos CR pumps are supplied with heavy-duty 2-pole, NEMA energy efficient C-frame motors built or selected to our rigid specifications. All CR pump motors have heavy-duty bearings for maximum thrust requirements.

TEFC motors

(Totally Enclosed Fan Cooled, constant speed)

HP	PH	Frame	S.F.	Voltage [V]	Mtr. Eff. [%]	Insul. class	KVA code	Full load current [A]	Service Factor current [A]	Start current [A]	Motor type
1/3	1	56C	1.35	115/230	55	B	K	6.0/3.0	7.6/3.8	28/14	Baldor
	3	56C	1.35	208-230/460	78.5	F	L	1.12-1.1/0.55	1.5-1.45/0.75	7.1-7.7/3.9	ML
1/2	1	56C	1.6	115/230	62	B	K	7.4/3.7	9.8/4.9	39/19.5	Baldor
	3	56C	1.25	208-230/460	78.5	F	K	1.64-1.55/0.78	2.0-1.9/0.95	9.7-10.1/5.1	ML
3/4	1	56C	1.25	115/230	66	B	K	9.6/4.8	11.4/5.7	56/28	Baldor
	3	56C	1.25	208-230/460	79	F	K	2.4-2.3/1.2	2.9-2.75/1.4	14.2-15/7.8	ML
1	1	56C	1.25	115/230	66	B	K	12/6.0	14.4/7.2	77/38.5	Baldor
	3	56C	1.25	208-230/460	80	F	J	3.25-3.35/1.68	4.0-3.9/1.95	19.2-21.8/10.9	ML
1 1/2	1	56C	1.3	115/208-230	71	B	K	17/9.5-8.6	20.4/11.3-10.2	106/58.6-53	Baldor
	3	56C	1.15	208-230/460	84	F	M	4.7-4.6/2.3	5.2-5.1/2.55	33.8-36.8/18.4	ML
2	1	56C	1.15	115/208-230	74	F	K	23/12.7-11.5	25.4/14.0-12.7	156/86-78	Baldor
	3	56C	1.15	208-230/460	85.5	F	G	5.7-5.4/2.7	6.55-6.1/3.05	46.2-48.6/24.3	ML
3	1	182TC	1.15	115/208-230	75	F	H	29/16-14.5	31.8/18-15.9	170/94-85	Baldor
	3	182TC	1.15	208-230/460	86.5	F	M	8.4-7.7/3.9	9.5-8.6/4.3	79.0-80.1/40.6	ML
5	1	213TCZ	1.15	208-230	80	F	J	24-22	27-25	188-170	Baldor
	3	182TC	1.15	208-230/460	88.5	F	L	13.8-13.0/6.5	15.6-14.6/7.3	124-129/64.4	ML
7 1/2	1	213TC	1.15	208-230	82	F	F	33.8-31	38.5-35.5	244-220	Baldor
	3	213TC	1.15	208-230/460	90	F	N	20.4-19.4/9.7	23-21.5/10.8	192-202/101	ML
10	1	213TC	1.15	230	85.5	F	F	40	46	284	Baldor
	3	213TC	1.15	208-230/460	90.2	F	L	26.5-25.5/12.8	30.5-28.5/14.5	239-252/127	ML
15	3	254TCZ	1.15	208-230/460	90.2	F	K	37.5-34/17	42.5-39/19.5	270-304/152	Baldor
20	3	254TCZ	1.15	208-230/460	90.2	F	K	47-46/23	53-52/26	355-412/206	Baldor
25	3	284TSCZ	1.15	230/460	91	F	J	56/28	64/32	498/249	Baldor
30	3	286TSCZ	1.15	230/460	91	F	G	70/35	78/39	450/225	Baldor
40	3	286TSC	1.15	230/460	91.7	F	G	88/44	102/51	614/307	Baldor
50	3	326TSCZ	1.15	230/460	93	F	G	110/55	128/64	746/393	Baldor
60	3	364TSCZ	1.15	230/460	93	F	G	134/67	154/77	918/459	Baldor
75	3	365TSCZ	1.15	230/460	93	F	G	166/83	188/94	1162/581	Baldor
100	3	405TSCZ	1.15	230/460	93.6	F	G	216/108	246/123	1422/711	Baldor

Baldor motor



TM02 7696 3803

ML motor



GR 7845

It is not recommended that an off-the-shelf standard Baldor motor be used on a Grundfos pump. Ideally, the best motor choice would be the Grundfos specified motor.

Single-phase Grundfos specified motors up to 7.5 hp have a built-in thermal overload switch.

Other motor types are available (i.e., Explosion proof, Mill and Chem duty, Premium Efficiency, etc.); consult local Grundfos company for more information.

Pumps supplied by Grundfos Canada are normally supplied with motors from other manufactures. 575 volt motors meet NEMA energy efficient standards. Dimensions and data will vary, contact local Grundfos company for more information.

All values are subject to change without notice.

ODP motors

(Open Drip Proof, constant speed)

HP	PH	ODP Frame	ODP S.F.	ODP Voltage	ODP Mtr. Eff. %	ODP Insul. class	ODP KVA code	ODP Full load current	ODP service Factor current	ODP Start current
15	3	254TCZ	1.15	208-230/460	89.5	F	H	37-35/17.5	40-39.4/19.7	225-248/124
20	3	254TC	1.15	230/460	90.2	B	G	48/24	55/27.5	306/153
25	3	284TSCZ	1.15	208-230/460	91	B	G	64-59/29.5	74-67/33.5	335-374/187
30	3	284TSC	1.15	230/460	91	F	H	70/35	80/40	480/240
40	3	286TSCZ	1.15	230/460	91.7	F	F	94/47	108/54	542/271
50	3	324TSCZ	1.15	230/460	92.4	F	G	116/58	134/67	732/366
60	3	324TSCZ	1.15	230/460	93	B	G	132/66	152/76	876/438
75	3	364TSCZ	1.15	230/460	93	F	G	168/84	192/96	1110/555
100	3	365TSCZ	1.15	230/460	93	F	G	226/113	260/130	1380/690

Baldor motor



TM02 7696

MLE motors

(Integrated variable frequency drive)

HP	Voltage	Ph	NEMA frame	Service factor	Full load eff [%] *	Ins. class	Full load amps **	Service factor amps
1/2	208-230	1	56C	1.0	71.0	F	2.80	-
3/4	208-230	1	56C	1.0	74.0	F	3.90	-
1	208-230	1	56C	1.0	76.0	F	5.20	-
	460-480	3	56C	1.25	78.0	F	1.70	2.10
1 1/2	208-230	1	56C	1.0	77.0	F	7.50	-
	208-230	3	56C	1.0	76.8	F	4.20	-
	460-480	3	56C	1.15	80.0	F	2.15	2.50
2	208-230	3	56C	1.0	78.3	F	5.60	-
	460-480	3	56C	1.15	82.0	F	2.70	3.10
3	208-230	3	182TC	1.0	79.5	F	8.10	-
	460-480	3	182TC	1.15	84.0	F	3.70	4.30
5	208-230	3	184TC	1.0	79.7	F	13.4	-
	460-480	3	184TC	1.15	85.0	F	6.10	7.00
7 1/2	208-230	3	215TC	1.0	82.5	F	19.7	-
	460-480	3	215TC	1.15	85.0	F	8.90	10.3
10	460-480	3	215TC	1.15	86.0	F	12.0	13.8

* This is the combined full load efficiency of the motor and variable frequency drive.

** At 208 volts for 208-230 volt motors and at 460 volts for 460-480 volt motors.



GR 8972_P

Pumped liquids

Thin, non-explosive liquids, not containing solid particles or fibers. The liquid must not chemically attack the pump materials. When pumping liquids with a density and/or viscosity higher than that of water, oversized motors must be used, if required.

Whether a pump is suitable for a particular liquid depends on a number of factors of which the most important are the chloride content, pH value, temperature and content of chemicals, oils, etc.

Please note that aggressive liquids (e.g. sea water and some acids) may attack or dissolve the protective oxide film of the stainless steel and thus cause corrosion. The CR(E), CRI(E), CRN(E) pump types are suitable for the following liquids:

CR(E), CRI(E)

- Non-corrosive liquids.

For liquid transfer, circulation and pressure boosting of cold or hot clean water.

CRN(E)

- Industrial liquids.

In systems where all parts in contact with the liquid must be made of high-grade stainless steel.

CRT(E)

- Saline liquids.
- Hypochlorites.
- Acids.

For saline or chloride-containing liquids such as sea water or oxidizing agents such as hypochlorites, CRT(E) pumps of titanium are available. See separate product guide on CRT(E).

List of pumped liquids

A number of typical liquids are listed on the following pages.

Other pump versions may be applicable, but those stated in the list are considered to be the best choices. The table is intended as a general guide only, and cannot replace actual testing of the pumped liquids and pump materials under specific working conditions.

The list should, however, be applied with some caution as factors such as

- concentration of the pumped liquid,
- liquid temperature or
- pressure

may affect the chemical resistance of a specific pump version.

Safety precautions must be made when pumping dangerous liquids.

Notes

D	Often with additives.
E	Density and/or viscosity differ from that of water. Allow for this when calculating motor output and pump performance.
F	Pump selection depends on many factors. Contact Grundfos.
H	Risk of crystallization/precipitation in shaft seal
1	The pumped liquid highly inflammable.
2	The pumped liquid is combustible.
3	Insoluble in water.
4	Low self-ignition point.

Pumped liquids

CR, CRI, CRN, CRE, CRIE, CRNE

Pumped liquid	Note	Liquid concentration, liquid temperature	CR		CRN	
			1s, 1, 3, 5, 10, 15, 20	32, 45, 64, 90, 120, 150	1s, 1, 3, 5, 10, 15, 20	32, 45, 64, 90, 120, 150
Acetic acid CH ₃ COOH		5 %, 68 °F			HQQE	HQQE/HBQE
Acetone CH ₃ COCH ₃	1, F	100 %, 68 °F			HBQE	KUBE/HBQE
Alkaline degreasing agent	D, F		HQQE	KUHE/HBQE		
Ammonium bicarbonate NH ₄ HCO ₃	E	20 %, 86 °F			HQQE	KUHE/HBQE
Ammonium hydroxide NH ₄ OH		20 %, 104 °F	HQQE	KUBE/HBQE		
Aviation fuel	1, 3, 4, F	100 %, 68 °F	HQBV	KUBV/HBQV		
Benzoic acid C ₆ H ₅ COOH	H	0,5 %, 68 °F			HQQV	KUBV/HBQV
Boiler water		<248 °F	HQQE	KUBE/HBQE		
	F	248 °F - 356 °F	-	-		
Calcareous water		< 194 °F	HQQE	KUHE		
Calcium acetate (as coolant with inhibitor) Ca(CH ₃ COO) ₂	D, E	30 %, 122 °F	HQQE	KUHE		
Calcium hydroxide Ca(OH) ₂	E	Saturated solution, 122 °F	HQQE	KUHE		
Chloride-containing water	F	< 86 °F, max. 500 ppm			HQQE	KUHE
Chromic acid H ₂ CrO ₄	H	1 %, 68 °F			HQQV	HQQV/HBQV
Citric acid HOC(CH ₂ CO ₂ H) ₂ COOH	H	5 %, 104 °F			HQQE	KUHE/HBQE
Completely desalinated water (demineralized water)		< 248 °F			HQQE	KUBE/HBQE
Condensate		< 194 °F	HQQE	KUHE/HBQE		
Copper sulfate CuSO ₄	E	10 %, 122 °F			HQQE	KUHE
Corn oil	D, E, 3	100 %, 176 °F	HQQV	KUHV/HBQV		
Diesel oil	2, 3, 4, F	100 %, 68 °F	HQBV	KUBV/HBQV		
Domestic hot water (potable water)		< 248 °F	HQQE	KUBE/HBQE		
Ethanol (ethyl alcohol) C ₂ H ₅ OH	1, F	100 %, 68 °F	HQQE	KUBE/HBQE		
Ethylene glycol HOCH ₂ CH ₂ OH	D, E	50 %, 122 °F	HQQE	KUHE		
Formic acid HCOOH		5 %, 68 °F			HQQE	KUBE/HBQE
Glycerine (glycerol) OHCH ₂ CH(OH)CH ₂ OH	D, E	50 %, 122 °F	HQQE	KUHE/HBQE		
Hydraulic oil (mineral)	E, 2, 3	100 %, 212 °F	HQQV	KUBV/HBQE		
Hydraulic oil (synthetic)	E, 2, 3	100 %, 212 °F	HQQV	KUBV/HBQE		
Isopropyl alcohol CH ₃ CHOHCH ₃	1, F	100 %, 68 °F	HQBV	KUBV/HBQV		
Lactic acid CH ₃ CH(OH)COOH	E, H	10 %, 68 °F			HQQE	KUBE/HBQE
Linoleic acid C ₁₇ H ₃₁ COOH	E, 3	100 %, 68 °F	HQQV	KUBV/HBQV		
Methanol (methyl alcohol) CH ₃ OH	1, F	100 %, 68 °F	HQQE	KUBE/HBQE		
Motor oil	E, 2, 3	100 %, 176 °F	HQQV	KUBV/HBQV		
Naphthalene C ₁₀ H ₈	E, H	100 %, 176 °F	HQQV	KUHV/HBQV		
Nitric acid HNO ₃	F	1 %, 68 °F			HQQE	HQQE/HBQE
Oil-containing water		< 212 °F	HQQV	KUBV/HBQV		
Olive oil	D, E, 3	100 %, 176 °F	HQQV	KUHV/HBQV		

Pumped liquids

CR, CRI, CRN, CRE, CRIE, CRNE


Pumped liquid	Note	Liquid concentration, liquid temperature	CR		CRN	
			1s, 1, 3, 5, 10, 15, 20	32, 45, 64, 90, 120, 150	1s, 1, 3, 5, 10, 15, 20	32, 45, 64, 90, 120, 150
Oxalic acid (COOH) ₂	H	1 %, 68 °F			HQQE	KUBE/HBQE
Ozone-containing water (O ₃)		1 PPM, < 105 °F			HQQE	KUBE/HBQE
Peanut oil	D, E, 3	100 %, 194 °F	HQQV	KUHV/HBQV		
Petrol/gasoline	1, 3, 4, F	100 %, 68 °F	HQBv	KUBV/HBQV		
Phosphoric acid H ₃ PO ₄	E	20 %, 68 °F			HQQV	KUBV/HBQV
Propanol C ₃ H ₇ OH	1, F	100 %, 68 °F	HQQV	KUBV/HBQV		
Propylene glycol CH ₃ CH(OH)CH ₂ OH	D, E	50 %, 194 °F	HQQE	KUHE		
Potassium carbonate K ₂ CO ₃	E	20 %, 122 °F	HQQE	KUHE		
Potassium formate (as coolant with inhibitor) KOOCH	D, E	30 %, 122 °F	HQQE	KUHE		
Potassium hydroxide KOH	E	20 %, 122 °F			HQQE	KUHE
Potassium permanganate KmnO ₄		5 %, 68 °F			HQQE	HQQE/HBQE
Rape seed oil	D, E, 3	100 %, 176 °F	HQQV	KUHV/HBQV		
Salicylic acid C ₆ H ₄ (OH)COOH	H	0,1 %, 68 °F			HQQE	KUBE/HBQE
Silicone oil	E, 3	100 %	HQQV	KUBV/HBQV		
Sodium bicarbonate NaHCO ₃	E	10 %, 140 °F			HQQE	KUHE/HBQE
Sodium chloride (as coolant) NaCl	D, E	30 %, < 41 °F, pH>8	HQQE	KUHE		
Sodium hydroxide NaOH	E	20 %, 122 °F			HQQE	KUHE
Sodium hypochlorite NaOCl	F	0,1 %, 68 °F			HQQE	HQQE
Sodium nitrate NaNO ₃	E	10 %, 140 °F			HQQE	KUHE/HBQE
Sodium phosphate Na ₃ PO ₄	E, H	10 %, 140 °F			HQQE	KUHE
Sodium sulfate Na ₂ SO ₄	E, H	10 %, 140 °F			HQQE	KUHE/HBQE
Softened water		< 248 °F			HQQE	KUBE/HBQE
Soybean oil	D, E, 3	100 %, 176 °F	HQQV	KUHV/HBQV		
Sulfuric acid H ₂ SO ₄	F	1 %, 68 °F			HQQV	KUHV/HBQV
Sulfurous acid H ₂ SO ₃		1 %, 68 °F			HQQE	KUBE/HBQE
Swimming pool water (low chloride)		Max 5 ppm free chlorine (Cl ₂)	HQQE	KUBE/HBQE		

Pipework connection

For pipework connection, various sets of counter flanges and couplings are available.







Adapter kit





6" flanges are available for CR, CRN 120 and 150 pumps. To use 6" flanges, two adapter kits must be ordered per pump.

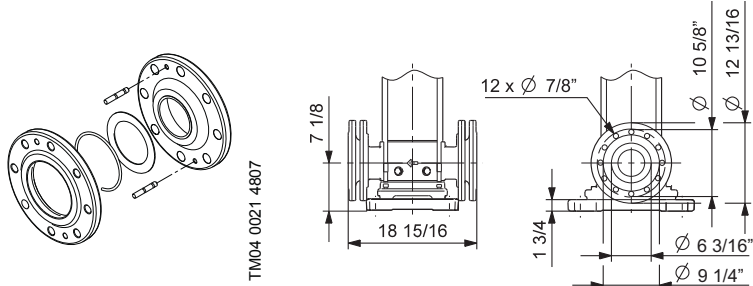Adapter kit	Pump type	Pipe connection	Number of flange kits needed	Product number
 TM04 0021 4807	CR 120 CR 150	6" RF 250 lb. Ductile iron	2	96638184
	CRN 120 CRN 150	6" RF 300 lb. ANSI 316 SS	2	96638186

Counter flanges for CR(E)

A set consists of two counter flanges, two gaskets, bolts and nuts.







Counter flange	Pump type	Description	Pressure class	Pipework connection	Product number
	CR 1s CR(E) 1 CR(E) 3 CR(E) 5	Threaded	ANSI 250 lb.	1 1/4" NPT	91122260
	CR(E) 10 CR(E) 15 CR(E) 20	Threaded	ANSI 250 lb.	2" NPT	335021
	CR(E) 32	Threaded	ANSI 125 lb.	2 1/2" NPT	559601
		Threaded	ANSI 250 lb.	2 1/2" NPT	345050
	CR(E) 45	Threaded	ANSI 125 lb.	3" NPT	569601
		Threaded	ANSI 250 lb.	3" NPT	91121952

Counter flange		Pump type	Description	Pressure class	Pipework connection	Product number	
		TM02 5697 + 5698 3802	CR(E) 64 CR(E) 90	Threaded	ANSI 125 lb.	4" NPT	579801
				Threaded	ANSI 250 lb.	4" NPT	3600028
			CR(E) 120 CR(E) 150	Threaded	ANSI 125 lb.	5" NPT	91121956
				Threaded	ANSI 250 lb.	5" NPT	91121957

Counter flanges for CRN(E)





Counterflanges for CRN(E) pumps are made of stainless steel according to AISI 316.

A set consists of two counter flanges, two gaskets, bolts and nuts.

Counter flange	Pump type	Description	Pressure class	Pipework connection	Product number	
	TM02 5691 3802	CRI(E), CRN(E) 1s, 1, 3 and 5	Threaded	ANSI 300 lb.	1 1/4" NPT	91129013
	TM02 5692 3802	CRI(E), CRN(E) 10, 15, 20	Threaded	ANSI 300 lb.	2" NPT	339919
ANSI 150 LB.  ANSI 300 LB. 	TM02 5693 + 5694 3802	CRN(E) 32	Threaded	ANSI 150 lb.	2 1/2" NPT	91121951
			Threaded	ANSI 300 lb.	2 1/2" NPT	0ID00138
3/4"  7/8" 	TM02 5695 + 5696 3802	CRN(E) 45	Threaded	ANSI 150 lb.	3" NPT	91121953
			Threaded	ANSI 300 lb.	3" NPT	91121954

Accessories


CR, CRI, CRN, CRE, CRIE, CRNE

Counter flange	Pump type	Description	Pressure class	Pipework connection	Product number
	CRN(E) 64 CRN(E) 90	Threaded	ANSI 150 lb.	4" NPT	0ID00148
		Threaded	ANSI 300 lb.	4" NPT	91121955
	CRN(E) 120 CRN(E) 150	Threaded	ANSI 150 lb.	5" NPT	91121958
		Threaded	ANSI 300 lb.	5" NPT	91121959

PJE couplings for CRN(E)


Couplings for CRN(E) pumps are made of stainless steel according to AISI 316.

A set consists of two couplings, two gaskets, two pipe stub and bolts and nuts.

Couplings	Pump type	Pipe stub	Rated pressure	Pipework connection	Rubber parts	Number of coupling sets needed	Product number
	CRI(E), CRN(E) 1s, 1, 3 and 5	Threaded	1160 psi	1 1/4" NPT	EPDM	1	4013010
					FKM	1	0ID00118
	CRI(E), CRN(E) 10, 15 and 20	Threaded	1015 psi	2" NPT	EPDM	1	331301
					FKM	1	0ID00128







FlexiClamp base connections

All sets comprise the necessary number of bolts and nuts as well as a gasket/O-ring.

Base connections	Pump type	Connection	Pipework connection	Rubber parts	Product number
	CRI(E), CRN(E) 1s, 1, 3 and 5	Oval (cast iron)	1" NPT	Klingsil	96468491
			1 1/4" NPT	Klingsil	96470781
		Oval (stainless steel)	1" NPT	Klingsil	96480850
			1 1/4" NPT	Klingsil	96480851

Accessories

CR, CRI, CRN, CRE, CRIE, CRNE

Base connections	Pump type	Connection	Pipework connection	Rubber parts	Product number
	TM02 1145 0601 CRI(E), CRN(E) 1s, 1, 3 and 5	Union ext. threaded	2" NPT	EPDM	96480852
				FKM	96480853
	TM02 1146 0601 CRI(E), CRN(E) 1s, 1, 3 and 5	ANSI (FGJ) (stainless steel)	1 1/4" NPT	EPDM	96480858
				FKM	96480859
	TM02 1147 0601 CRI(E), CRN(E) 1s, 1, 3 and 5	Clamp, threaded pipe stub	1" NPT	EPDM	96480854
			1 1/4" NPT	FKM	96480855
				EPDM	96480856
				FKM	96480857
	TM02 7237 2803 CRI(E), CRN(E) 10, 15 and 20	Oval (cast iron)	2" NPT	Klingsil	96498838
		Oval (stainless steel)	2" NPT	Klingsil	96498839
	TM02 7238 2803 CRI(E), CRN(E) 10, 15 and 20	ANSI (FGJ) (stainless steel)	2" NPT	EPDM	96511402
				FKM	96511403
	TM02 7239 2803 CRI(E), CRN(E) 10, 15 and 20	Clamp, threaded pipe stub	1 1/2" NPT	EPDM	96500271
			2" NPT	FKM	96500272
				EPDM	96500273
			2" NPT	FKM	96500274
				EPDM	96508602
				FKM	96508603

Potentiometer for CRE, CRIE, CRNE

Potentiometer for setpoint setting and start/stop of the CRE, CRIE, CRNE pump.

Product	Product number
External potentiometer with cabinet for wall mounting	625468

G10-LON interface for CRE, CRIE, CRNE

The G10-LON interface is used in connection with data transmission between a Locally Operating Network (LON) and electronically controlled Grundfos pumps applying the Grundfos bus-protocol GENIbus.

Product	Product number
G10-LON interface	00605726

LiqTec for CR(E), CRI(E) and CRN(E)

A dry-running protection device. The Grundfos LiqTec stops the pump immediately

- if there is no liquid in the pump (dry-running)
- If the liquid temperature exceeds $266\text{ }^{\circ}\text{F} \pm 8\text{ }^{\circ}\text{F}$.

When connected to the PTC sensors in the motor, the LiqTec also protects the motor against overheating.


LiqTec is prepared for DIN rail mounting in control cabinet.

Enclosure class: IP X0.

Remote control, R100

R100 is used for wireless communication with the CRE, CRIE, CRNE pump. The communication takes place by means of infrared light.

Product	Product number
R100	96615297

LiqTec dry-running protection	Pump type	Voltage [V]	LiqTec	Sensor ½"	Cable 16.4 ft	Extension cable 49.2 ft	Product number
	CR(E) CRI(E) CRN(E)	200-240	●	●	●	-	96556429
		80-130	●	●	●	-	96556430
		-	-	-	-	●	96443676

Sensors for CRE, CRIE, CRNE

Accessory	Measuring range	Product number
Pressure sensor • Connection: 1/4" NPT Includes a 6 ft cable with removable potted plug in addition to a standard plug for remote mounting.	0-87 psi (0-6 bar)	91136169
	0-145 psi (0-10 bar)	91136170
	0-232 psi (0-16 bar)	91136171
	0-362 psi (0-25 bar)	91136172
	0-580 psi (0-4 bar)	91136173

Gauges for CRE, CRIE, CRNE

Accessory	Measuring range	Product number
Liquid filled pressure gauge • AISI 304/Copper	30" Hg - 30 psi	91123566
	0-60 psi	00ID8562
	0-100 psi	00ID8563
	0-160 psi	00ID8564
	0-200 psi	00ID8565
	0-300 psi	00ID8566
	0-400 psi	00ID8567
	0-600 psi	00ID8568
	30" Hg - 30 psi	91130835
	0-60 psi	00ID8569
Liquid filled pressure gauge • AISI 316	0-100 psi	00ID8570
	0-160 psi	00ID8571
	0-200 psi	00ID8572
	0-300 psi	00ID8573
	0-400 psi	00ID8574
	0-600 psi	00ID8575
	0-200 psi	00ID8576

Lists of variants - on request

Although the Grundfos CR(E), CRI(E), CRN(E) product range offers a number of pumps for different applications, customers require specific pump solutions to satisfy their needs.

Below please find the range of options available for customizing the CR(E) pumps to meet the customers' demands. Contact Grundfos for further information or for requests other than the ones mentioned below.

Motors

Variant	Description
Explosion proof motors	For operation in hazardous atmospheres, explosion-proof or dust-ignition-proof motors may be required.
Motors with anti-condensation heating unit	For operation in humid environments motors with built-in anti-condensation heating may be required.
Premium efficient motors	Grundfos offers motors from 1 to 100 Hp with a Premium efficiency class.
Different motor brand	If technically possible, Grundfos can fit the pump with a motor of a brand other than the standard. This will normally increase the time of delivery. Alternatively, the pump can be supplied without a motor (motor thrust rating must be checked).
Oversized motor	Ambient temperatures above 104 °F or installation at altitudes of more than 3280 ft above sea level require the use of an oversized motor (i.e. derating).
4-pole motors	Grundfos offers standard motors fitted with 4-poles.

Connections and other variants

Variant	Description
Pipe connections	In addition to the wide range of standard flange connections, a 232 Psi DIN standard clamping flange is available. Customized flanges are available according to specifications.
TriClamp connections	TriClamp connections are of a hygienic design with a sanitary coupling for use in the pharmaceutical and food industry.
Electropolished pumps	To substantially reduce the risk of corrosion of the materials. For use in the pharmaceutical/food industry.

Shaft seals

Variant	Description
Shaft seal with FFKM O-ring material	Shaft seals with FFKM or FXM o-ring material are recommended for applications where the pumped liquid may damage the standard O-ring material.
Seal with flush, quench seal	Recommended for applications involving crystallizing, hardening or sticky liquids.
Cool-Top® shaft seal system	Recommended for applications involving extremely high temperatures. No conventional mechanical shaft seal can withstand liquid temperatures of up to 356 °F for any length of time. For that type of application, Grundfos' unique air-cooled shaft seal system is recommended. In order to ensure a low liquid temperature around the standard shaft seal, the pump is fitted with a special air-cooled shaft seal chamber. No separate cooling is required.
Double shaft seal with pressure chamber	Recommended for applications involving poisonous or explosive liquids. Protects the surrounding environment and the people working in the vicinity of the pump. Consists of two seals mounted in a "back-to-back" arrangement inside a separate pressure seal chamber. As the pressure in the chamber is higher than the pump pressure, leakage is prevented. A dosing pump or a special pressure-intensifier generates the seal chamber pressure.
CRN MAGdrive	Magnetically driven pumps for industrial applications. Key applications are industrial processes involving the handling of aggressive, environmental, dangerous or volatile liquids, e.g. organic compounds, solvents, etc.

Pumps

Variant	Description
Horizontally mounted pump	For safety or height reasons, certain applications, for instance on ships, require the pump to be mounted in the horizontal position. For easy installation the pump is equipped with brackets that support motor and pump.
Low-temperature pump to -4 °F	Exposed to temperatures down to -40 °F, coolant pumps may require neck-rings with a different diameter in order to prevent impeller drag.
High-speed pump up to 681 psi	For high-pressure applications, a unique pump capable of generating up to 681 psi pressure is available. The pump is equipped with a high-speed motor, type MLE. The direction of rotation is the opposite of that of standard pumps, and the chamber stack is turned upside-down, as a result of which the pumped liquid flows in the opposite direction.
High-pressure pump up to 696 psi	For high-pressure applications, a unique double pump system capable of generating up to 696 psi pressure is available.
Low-NPSH pump (improved suction)	Recommended for boiler-feed applications where cavitation may occur due to poor inlet conditions.
Belt-driven pumps	Belt-driven pumps designed to operate in places with limited space or where no electrical power is available.
Pumps for pharmaceutical and biotechnological applications	CRN(E) pumps designed for applications requiring the sterilization and CIP capability of pipes, valves and pumps. (CIP = Cleaning-In-Place).

CR(E), CRI(E), CRN(E)

Vertical Multistage Centrifugal Pumps

Client Information

Project title:

Reference number:

Client contact:

Location Information

For:

Site:

Address:

Application Information

Operating Conditions

	Max.	Norm.	Min.
Capacity (gpm)			
Suction Pressure (psig)			
Discharge Pressure (psig)			
Differential Head (ft)			
Hydraulic Power (hp) at designated capacity			
NPSH Available (ft)			

Service

Continuous

Intermittent (starts/day):

Pump Information

Model Information from Type Key and Codes:

Quantity Required:

Minimum required flow:

Product Guide additional information pages

Materials page number:

Technical data page number:

Motor Information

HP:

Phase:

Voltage:

Custom-built pump information (optional):

Company name:

Prepared by:

Phone number: ()

Fax number: ()

Date:

Page 1 of:

Quote number:

Client name:

Client number:

Client phone number: ()

Unit:

Service:

City:

State:

Zip
Code:

Pumped Fluid

Fluid type:

	Rated	Max.	Norm.
Fluid Temperature (°F) at designated temperature			
Specific Gravity			
Vapor Pressure (psia)			
Viscosity (cp)			

Fluid pH:

Chlorides (ppm):

Hazardous:

Corrosion/Erosion

Flammable:

caused by:

Other:

----> (Example: CR 5-10 A-FGJ-A-E-HQQE)

NPSH required at duty point:

Performance curve page number:

Motor data page number:

Enclosure:

Additional Information

CR(E), CRI(E), CRN(E)

Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation.

The pump has the following characteristics:

- impellers and intermediate chambers are made of AISI _____ Stainless steel
 - Pump head and base are made of _____
 - Power transmission is via cast iron split coupling.
 - pipework connections is via _____
- The motor is a _____ -phase AC motor.

Technical

Rated flow: _____ GPM
 Rated head: _____ Feet
 Minimum liquid temperature: _____ °F
 Maximum liquid temperature: _____ °F
 Type of shaft seal: _____

Materials

Material, pump housing: _____
 Material, shaft: AISI _____ Stainless Steel
 Material, impeller: AISI _____ Stainless Steel
 Material, sleeve: AISI _____ Stainless Steel
 Material, seal metal: AISI _____ Stainless Steel
 - seal face: _____
 - seal face: _____
 - seal elastomer: _____

Installation

Maximum ambient temperature: _____ °F
 Max. pressure at stated temp.: _____ PSI/ °F
 Standard, pipe connection: _____
 Size, pipe connection: _____
 Rated pressure, pipe connection: _____ PSI
 Frame size for motor: _____ NEMA


Electrical data

Motor type: _____
 Rated power (P2): _____ HP
 Frequency: _____ Hz
 Rated voltage: _____ V
 Rated current: _____ A
 Service factor: _____
 Starting current: _____ A
 Rated speed: _____ RPM
 Full load motor efficiency: _____ %
 Insulation class: _____

Additional

Gross weight: _____ Lbs.
 Shipping volume: _____
 Model: _____

WebCAPS

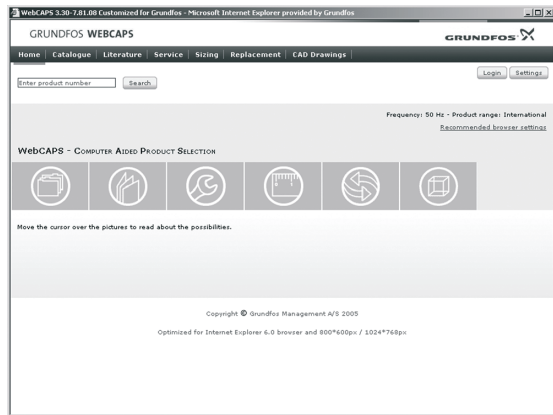


WebCAPS is a **Web-based Computer Aided Product Selection** program available on www.grundfos.com.

WebCAPS contains detailed information on more than 185,000 Grundfos products in more than 22 languages.

In WebCAPS, all information is divided into 6 sections:


- Catalog
- Literature
- Service
- Sizing
- Replacement
- CAD drawings.

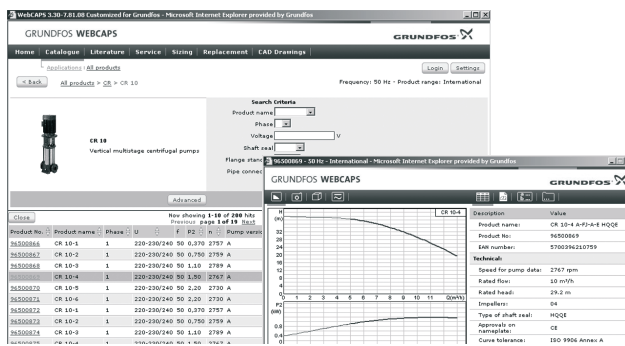

Catalog

This section is based on fields of application and pump types, and contains


- technical data
- curves (QH, Eta, P1, P2, etc) which can be adapted to the density and viscosity of the pumped liquid and show the number of pumps in operation
- product photos
- dimensional drawings
- wiring diagrams
- quotation texts, etc.

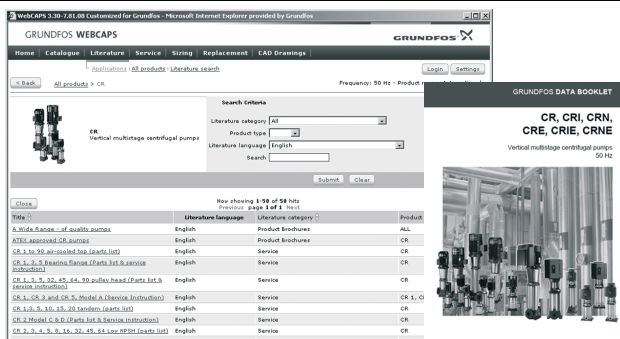

Literature

In this section you can access all the latest documents of a given pump, such as

- product guides
- installation and operating instructions
- service documentation, such as Service kit catalog and Service kit instructions
- quick guides
- product brochures, etc.

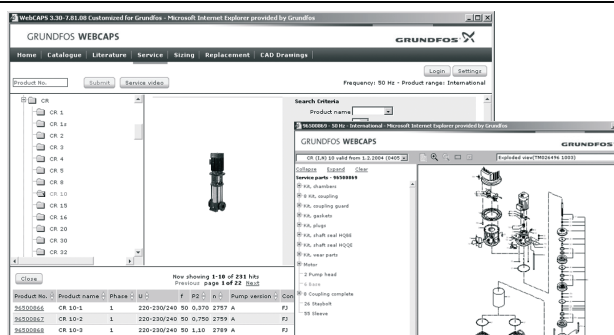


Service

This section contains an easy-to-use interactive service catalog. Here you can find and identify service parts of both existing and discontinued Grundfos pumps.

Furthermore, this section contains service videos showing you how to replace service parts.

Further documentation


CR, CRI, CRN, CRE, CRIE, CRNE

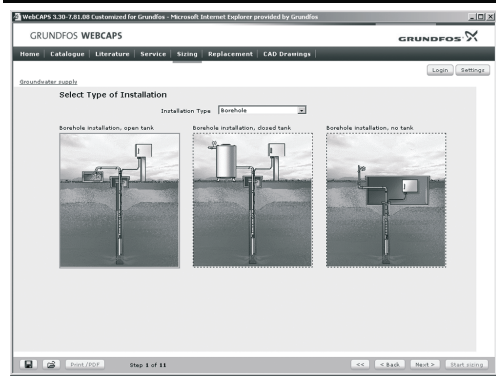

Sizing

This section is based on different fields of application and installation examples, and gives easy step-by-step instructions in how to


- select the most suitable and efficient pump for your installation
- carry out advanced calculations based on energy consumption, payback periods, load profiles, life cycle costs, etc.
- analyse your selected pump via the built-in life cycle cost tool
- determine the flow velocity in wastewater applications, etc.

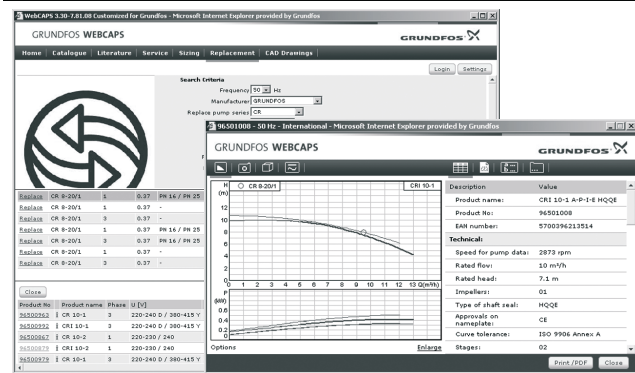Replacement

In this section you find a guide to selecting and comparing replacement data of an installed pump in order to replace the pump with a more efficient Grundfos pump.

The section contains replacement data of a wide range of pumps produced by other manufacturers than Grundfos.

Based on an easy step-by-step guide, you can compare Grundfos pumps with the one you have installed on your site. When you have specified the installed pump, the guide will suggest a number of Grundfos pumps which can improve both comfort and efficiency.

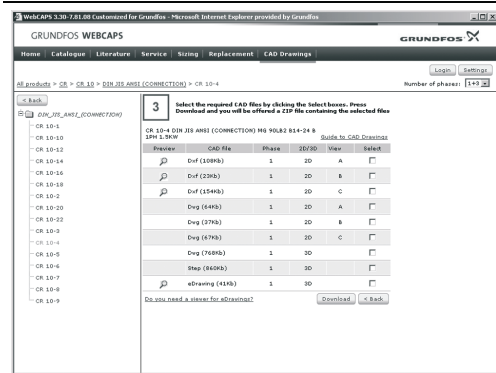

CAD drawings

In this section it is possible to download 2-dimensional (2D) and 3-dimensional (3D) CAD drawings of most Grundfos pumps.

These formats are available in WebCAPS:

2-dimensional drawings:

- .dxf, wireframe drawings
- .dwg, wireframe drawings.

3-dimensional drawings:

- .dwg, wireframe drawings (without surfaces)
- .stp, solid drawings (with surfaces)
- .eprt, E-drawings.

WinCAPS



WinCAPS CD-ROM

WinCAPS is a **Windows-based Computer Aided Product Selection** program containing detailed information on more than 185,000 Grundfos products in more than 22 languages.

The program contains the same features and functions as WebCAPS, but is an ideal solution if no Internet connection is available.

WinCAPS is available on CD-ROM and updated once a year

L-CR-PG-001 1210	US
Repl. L-CR-PG-001 04/09	
© 2009 - 2010 Grundfos Pumps Corp.	

The name Grundfos, the Grundfos logo, and the payoff Be-Think-Innovate are registered trademarks owned by Grundfos Management A/S or Grundfos A/S, Denmark. All rights reserved worldwide.

Subject to alterations.

GRUNDFOS Pumps Corporation
17100 West 118th Terrace
Olathe, Kansas 66061
Phone: +1-913-227-3400
Telefax: +1-913-227-3500

GRUNDFOS Canada Inc.
2941 Brighton Road
Oakville, Ontario L6H 6C9 Canada
Phone: +1-905 829 9533
Telefax: +1-905 829 9512

Bombas GRUNDFOS de Mexico S.A. de C.V.
Boulevard TLC No. 15
Parque Industrial Stiva Aeropuerto
Apodaca, N.L. Mexico 66600
Phone: +52-81-8144 4000
Telefax: +52-81-8144 4010

www.grundfos.com

