

PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____





UPS 50-44 F

Circulator pumps

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Flow: _____	Maximum operating pressure: 10 bar	Max. power input: 194 W
Head: _____	Liquid temperature range: 0 .. 110 °C	Rated power - P2: 0.12 kW
Efficiency: _____	Maximum ambient temperature: 40 °C	Rated voltage: 115 V
Liquid: Water	Approvals: UL, CSA	Mains frequency: 60 Hz
Temperature: 60 °C	Type of connection: C.I. Flange	Insulation class: F
NPSH required: m	Flange standard: USA Round	Motor protection: CONTACT
Viscosity: _____	Pipe connection: 4 - Bolt Flange	Thermal protection: Internal
Specific Gravity: 0.985	Product number: On request	

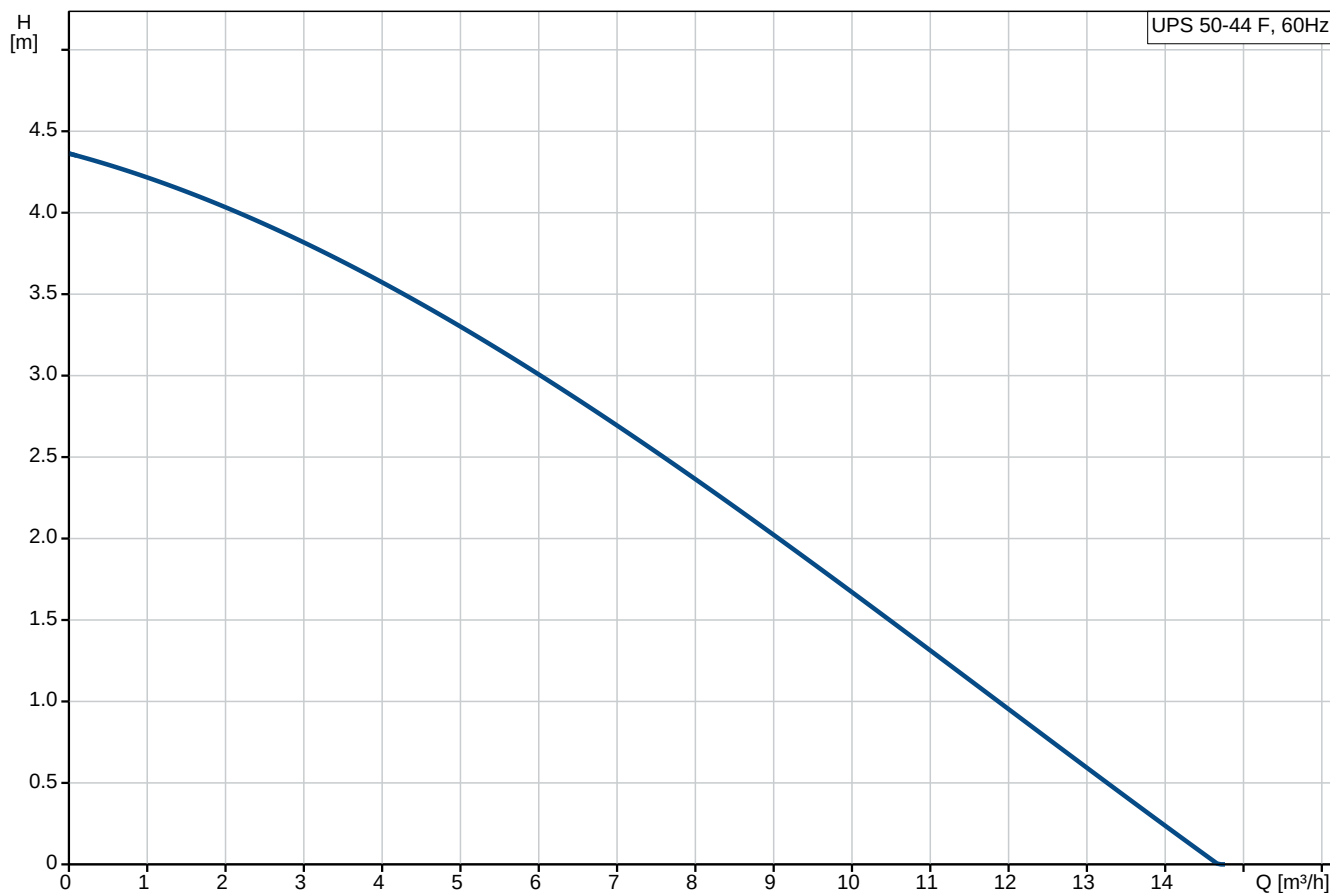

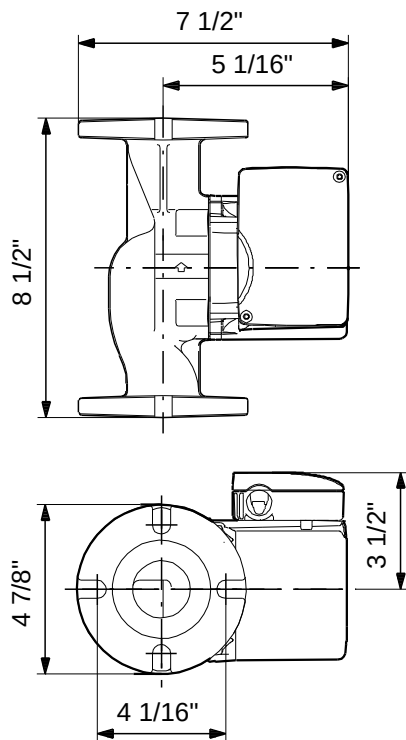

Materials:

Pump housing: Cast iron
 EN-JL1030
 ASTM 30 B

Impeller: Composite, PES

Tender Text



Note! Product picture may differ from actual product

Product No.: On request

UPS 50-44 F

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.

The bearings are lubricated by the pumped liquid.

The pump is characterized by:

- * Ceramic shaft and radial bearings.
- * Carbon axial bearing.
- * Stainless steel rotor can and bearing plate.
- * Corrosion-resistant impeller, Composite, PES.
- * Cast iron pump housing.

The motor is a 1-phase motor.

No additional motor protection is required.

Liquid:

Pumped liquid: Water
Liquid temperature range: 0 .. 110 °C
Liquid temperature during operation: 60 °C
Density: 983.2 kg/m³

Technical:

Approvals on nameplate: UL, CSA

Materials:

Pump housing: Cast iron
EN-JL1030
ASTM 30 B
Impeller: Composite, PES

Installation:

Maximum ambient temperature: 40 °C
Amb. max at 80 dgr C liquid: 80 °C
Maximum operating pressure: 10 bar
Flange standard: USA Round
Type of connection: C.I. Flange
Pipe connection: 4 - Bolt Flange
Pressure rating: 10
Port-to-port length: 216 mm

Electrical data:

Max. power input: 194 W
Rated power - P2: 0.12 kW
Mains frequency: 60 Hz
Rated voltage: 1 x 115 V



Company name:

Created by:

Phone:

Date:

28/11/2017

Current in speed 3: 1.7 A
Capacitor size - run: 20 μ F
Number of poles: 2
Insulation class (IEC 85): F

Others:

Gross weight: 7.03 kg

Position	Qty.	Description
	1	UPS 50-44 F  Note! Product picture may differ from actual product Product No.: On request The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump is characterized by: * Ceramic shaft and radial bearings. * Carbon axial bearing. * Stainless steel rotor can and bearing plate. * Corrosion-resistant impeller, Composite, PES. * Cast iron pump housing. The motor is a 1-phase motor. No additional motor protection is required. Liquid: Pumped liquid: Water Liquid temperature range: 0 .. 110 °C Liquid temperature during operation: 60 °C Density: 983.2 kg/m³ Technical: Approvals on nameplate: UL, CSA Materials: Pump housing: Cast iron EN-JL1030 ASTM 30 B Impeller: Composite, PES Installation: Maximum ambient temperature: 40 °C Amb. max at 80 dgr C liquid: 80 °C Maximum operating pressure: 10 bar Flange standard: USA Round Type of connection: C.I. Flange Pipe connection: 4 - Bolt Flange Pressure rating: 10 Port-to-port length: 216 mm Electrical data: Max. power input: 194 W Rated power - P2: 0.12 kW Mains frequency: 60 Hz Rated voltage: 1 x 115 V Current in speed 3: 1.7 A Capacitor size - run: 20 µF



Company name:

Created by:


Phone:

Date:




28/11/2017

Position	Qty.	Description
		Number of poles: 2 Insulation class (IEC 85): F Others: Gross weight: 7.03 kg


On request UPS 50-44 F 60 Hz

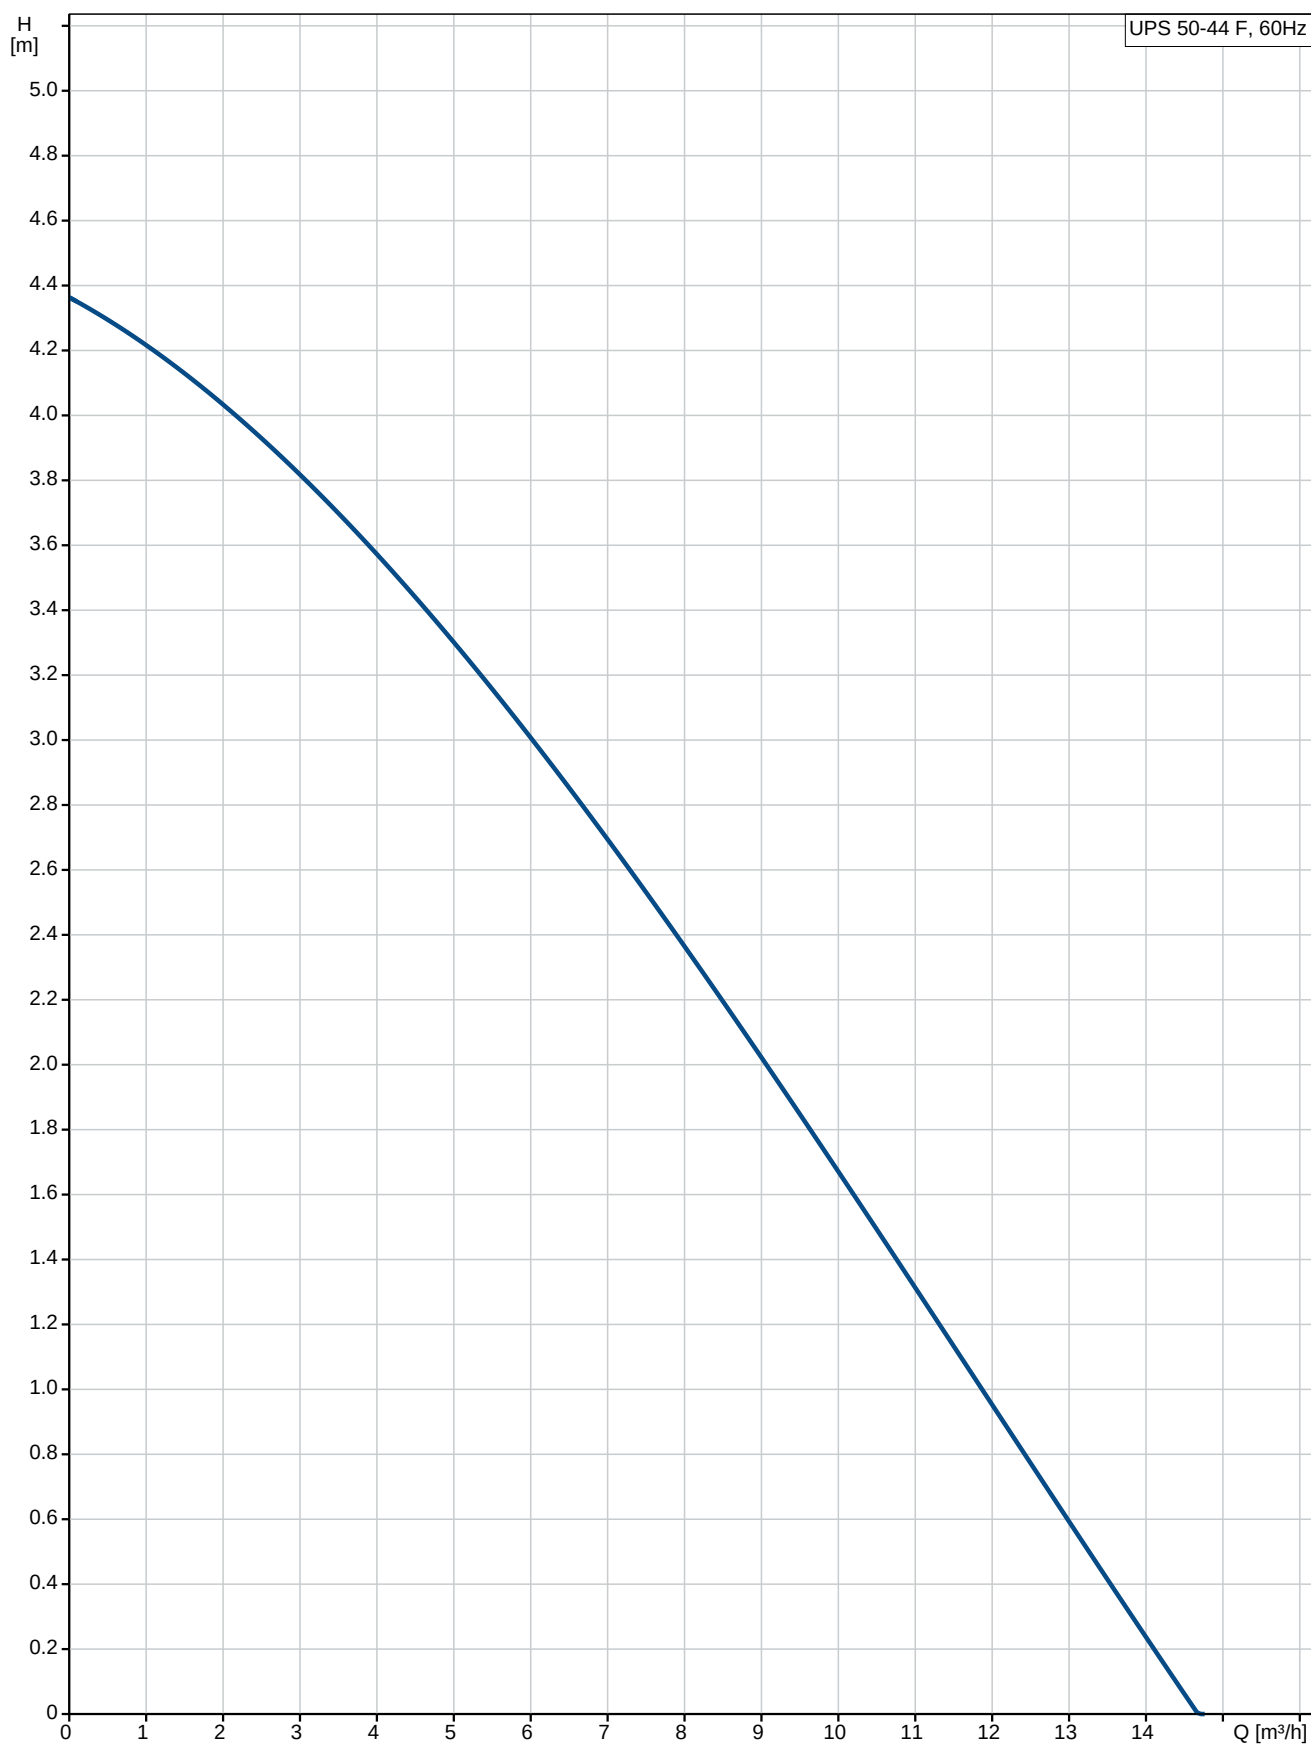

Description	Value
General information:	
Product name:	UPS 50-44 F
Product No:	On request
EAN number:	On request
Technical:	
Speed no:	3
Max flow:	14.5 m³/h
Head max:	4.4 m
Approvals on nameplate:	UL, CSA
Materials:	
Pump housing:	Cast iron
	EN-JL1030
	ASTM 30 B
Impeller:	Composite, PES
Installation:	
Maximum ambient temperature:	40 °C
Amb. max at 80 dgr C liquid:	80 °C
Maximum operating pressure:	10 bar
Flange standard:	USA Round
Type of connection:	C.I. Flange
Pipe connection:	4 - Bolt Flange
Pressure rating:	10
Port-to-port length:	216 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 110 °C
Liquid temperature during operation:	60 °C
Density:	983.2 kg/m³
Electrical data:	
Max. power input:	194 W
Rated power - P2:	0.12 kW
Mains frequency:	60 Hz
Rated voltage:	1 x 115 V
Current in speed 3:	1.7 A
Capacitor size - run:	20 µF
Number of poles:	2
Insulation class (IEC 85):	F
Motor protec:	CONTACT
Thermal protec:	Internal
Controls:	
Pos term box:	9H
Others:	
Gross weight:	7.03 kg

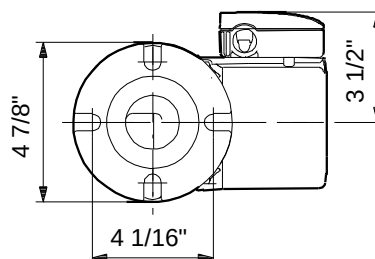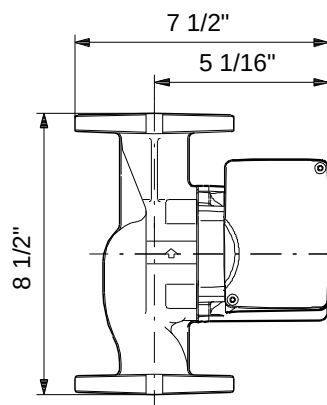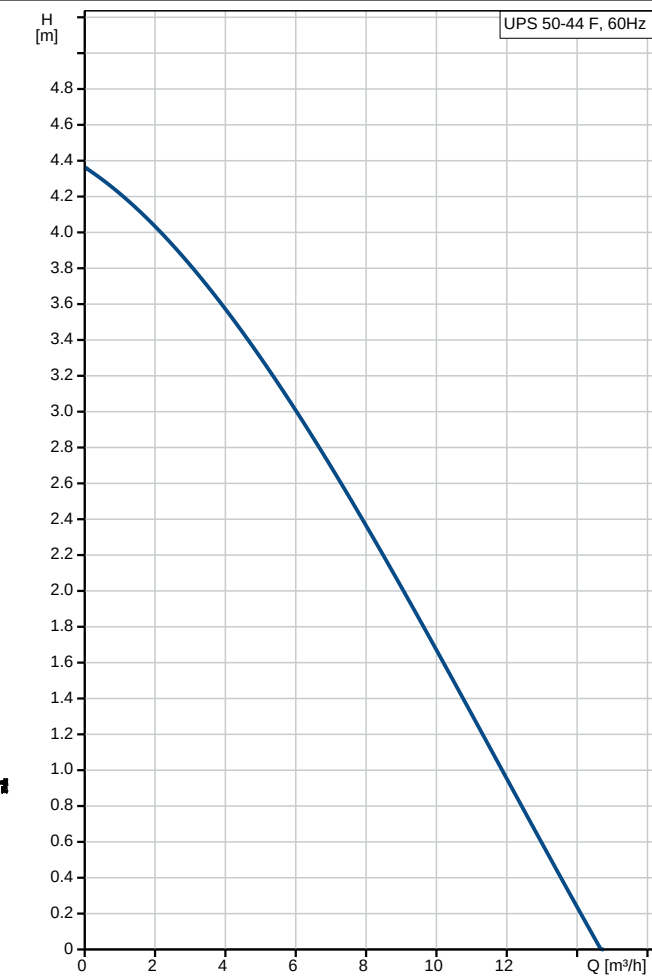

On request UPS 50-44 F 60 Hz

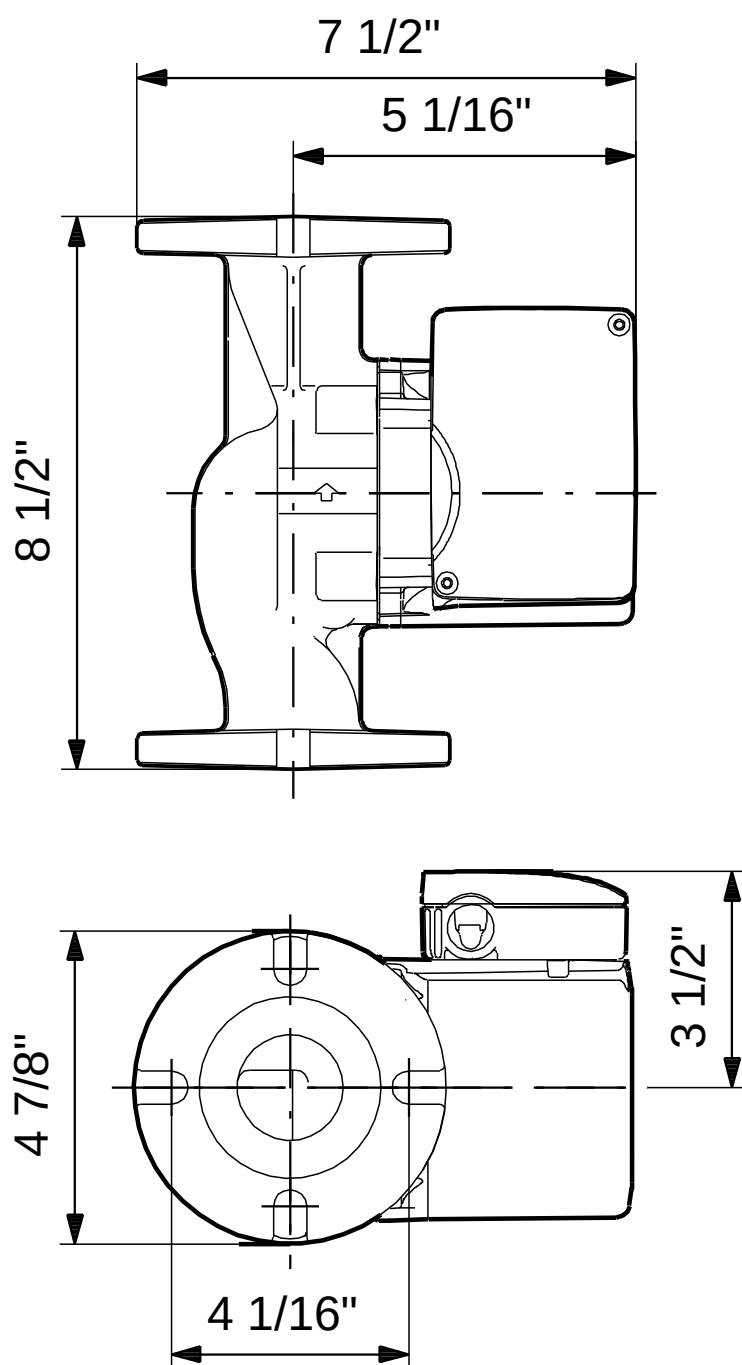

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.



Company name:

Created by:

Phone:

Date:

28/11/2017

Order Data:

Product name: UPS 50-44 F

Amount: 1

Product No: On request

Total: Price on request
