

PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____





UPS 40-240 F

Circulator pumps

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Flow: _____	Maximum operating pressure: 10 bar	Max. power input: 1350 W
Head: _____	Liquid temperature range: -10 .. 120 °C	Rated voltage: 230 V
Efficiency: _____	Maximum ambient temperature: 40 °C	Mains frequency: 60 Hz
Liquid: Water	Approvals: CUL	Enclosure class: X4D
Temperature: 60 °C	Type of connection: F	Insulation class: H
NPSH required: m	Flange standard: USA Oval	Motor protection: CONTACT
Viscosity: _____	Pipe connection: GF 40/43	Thermal protection: INT.
Specific Gravity: 0.985	Product number: On request	

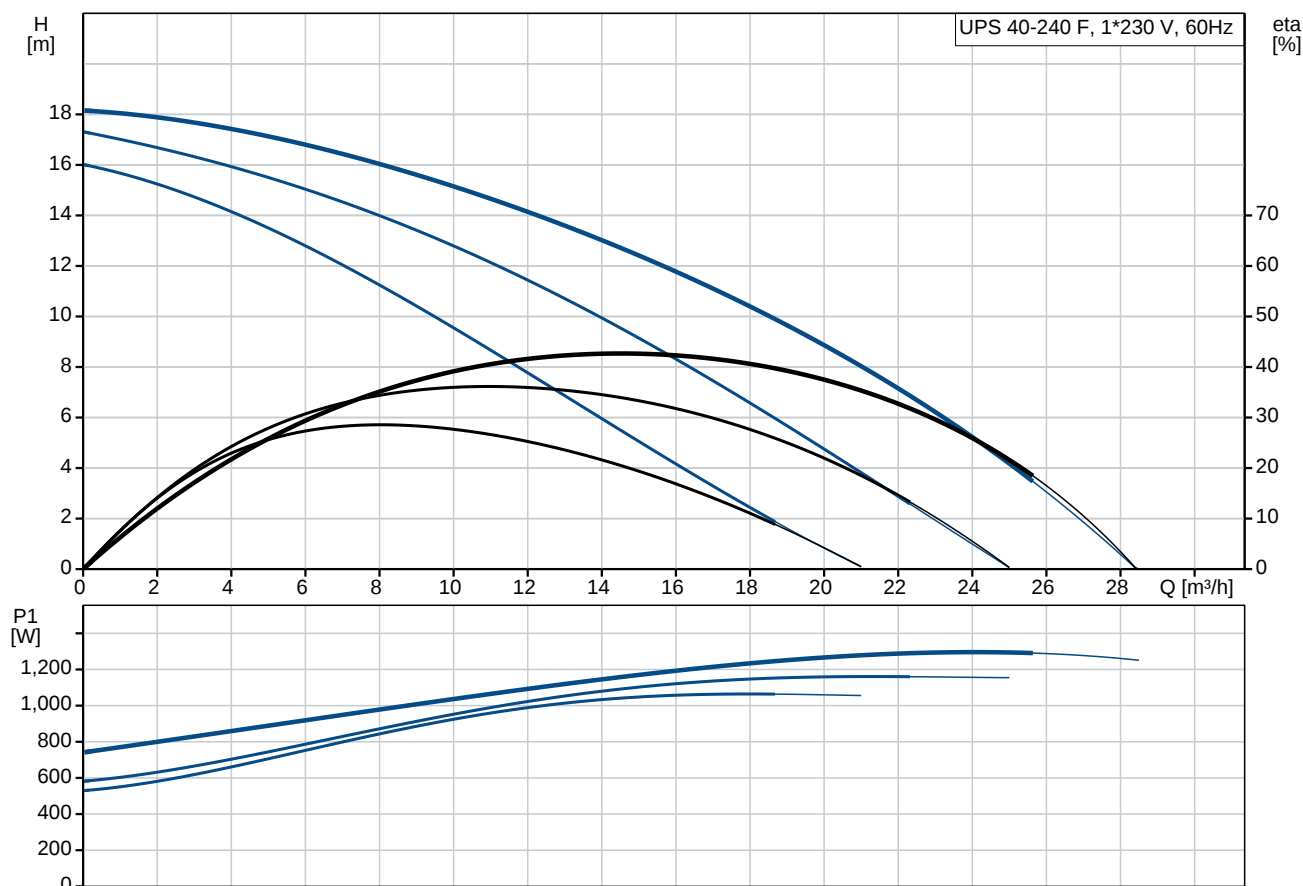

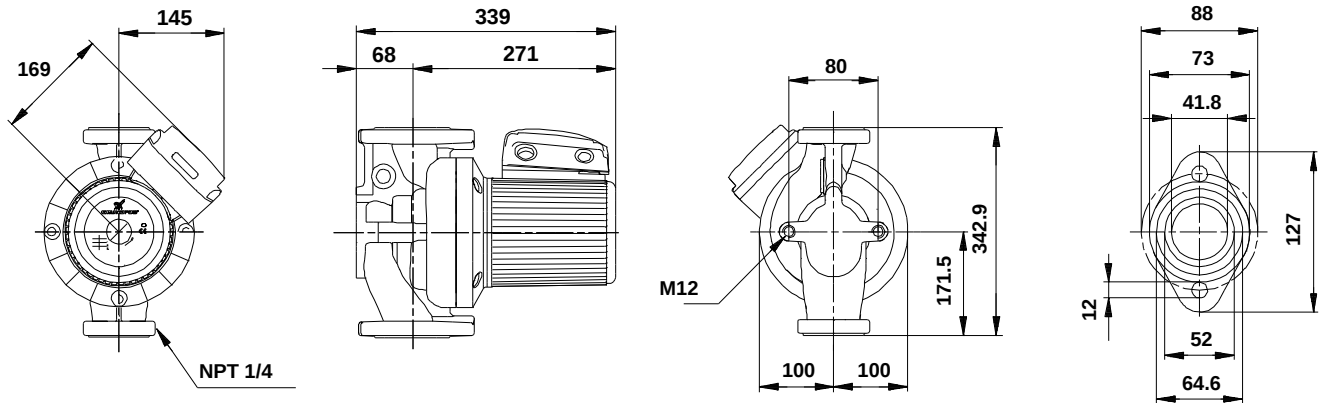

Materials:

Pump housing: Cast iron
EN-JL1040
ASTM 35 B - 40 B

Impeller: Stainless steel
DIN W.-Nr. 1.4301
AISI 304

Tender Text



Note! Product picture may differ from actual product

Product No.: On request

UPS 40-240 F

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.

The bearings are lubricated by the pumped liquid.

In order to avoid problems in connection with disposal, great importance has been attached to using as few different materials as possible.

The pump is characterized by:

- * 3 speed motor.
- * Ceramic radial bearings.
- * Carbon axial bearing.
- * Stainless steel rotor can, bearing plate

and rotor cladding.

- * Aluminium alloy stator housing.
- * Cast iron pump housing.
- * Stator with built-in thermal switch.

The motor is a 1-phase motor.

The pump is supplied with a standard module in the terminal box.

The standard module is to be connected to the mains supply via external contactor.

Controls:

Relay: Y

Liquid:

Pumped liquid: Water
Liquid temperature range: -10 .. 120 °C
Liquid temperature during operation: 60 °C
Density: 983.2 kg/m³

Technical:

Approvals on nameplate: CUL

Materials:

Pump housing: Cast iron
EN-JL1040
ASTM 35 B - 40 B
Impeller: Stainless steel
DIN W.-Nr. 1.4301

AISI 304

Installation:

Range of ambient temperature: 0 .. 40 °C
Maximum operating pressure: 10 bar
Flange standard: USA Oval
Type of connection: F
Pipe connection: GF 40/43
Pressure rating: 145 psi
Port-to-port length: 342 mm

Electrical data:

Power input in speed 1: 1100 W
Power input in speed 2: 1200 W
Max. power input: 1350 W
Mains frequency: 60 Hz
Rated voltage: 1 x 230 V
Current in speed 1: 5.15 A
Current in speed 2: 5.55 A
Current in speed 3: 6.2 A
Cos phi in speed 1: 0,93
Cos phi in speed 2: 0,94
Cos phi: 0,95
Capacitor size - run: 30 µF/400 V
Enclosure class (IEC 34-5): X4D
Insulation class (IEC 85): H


Others:

Net weight: 26.2 kg
Gross weight: 30 kg
Shipping volume: 0.098 m³





Position	Qty.	Description
	1	UPS 40-240 F  Note! Product picture may differ from actual product Product No.: On request The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. In order to avoid problems in connection with disposal, great importance has been attached to using as few different materials as possible. The pump is characterized by: * 3 speed motor. * Ceramic radial bearings. * Carbon axial bearing. * Stainless steel rotor can, bearing plate and rotor cladding. * Aluminium alloy stator housing. * Cast iron pump housing. * Stator with built-in thermal switch. The motor is a 1-phase motor. The pump is supplied with a standard module in the terminal box. The standard module is to be connected to the mains supply via external contactor. Controls: Relay: Y Liquid: Pumped liquid: Water Liquid temperature range: -10 .. 120 °C Liquid temperature during operation: 60 °C Density: 983.2 kg/m³ Technical: Approvals on nameplate: CUL Materials: Pump housing: Cast iron EN-JL1040 ASTM 35 B - 40 B Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304

Position	Qty.	Description
		Installation: Range of ambient temperature: 0 .. 40 °C Maximum operating pressure: 10 bar Flange standard: USA Oval Type of connection: F Pipe connection: GF 40/43 Pressure rating: 145 psi Port-to-port length: 342 mm Electrical data: Power input in speed 1: 1100 W Power input in speed 2: 1200 W Max. power input: 1350 W Mains frequency: 60 Hz Rated voltage: 1 x 230 V Current in speed 1: 5.15 A Current in speed 2: 5.55 A Current in speed 3: 6.2 A Cos phi in speed 1: 0,93 Cos phi in speed 2: 0,94 Cos phi: 0,95 Capacitor size - run: 30 µF/400 V Enclosure class (IEC 34-5): X4D Insulation class (IEC 85): H Others: Net weight: 26.2 kg Gross weight: 30 kg Shipping volume: 0.098 m³

On request UPS 40-240 F 60 Hz

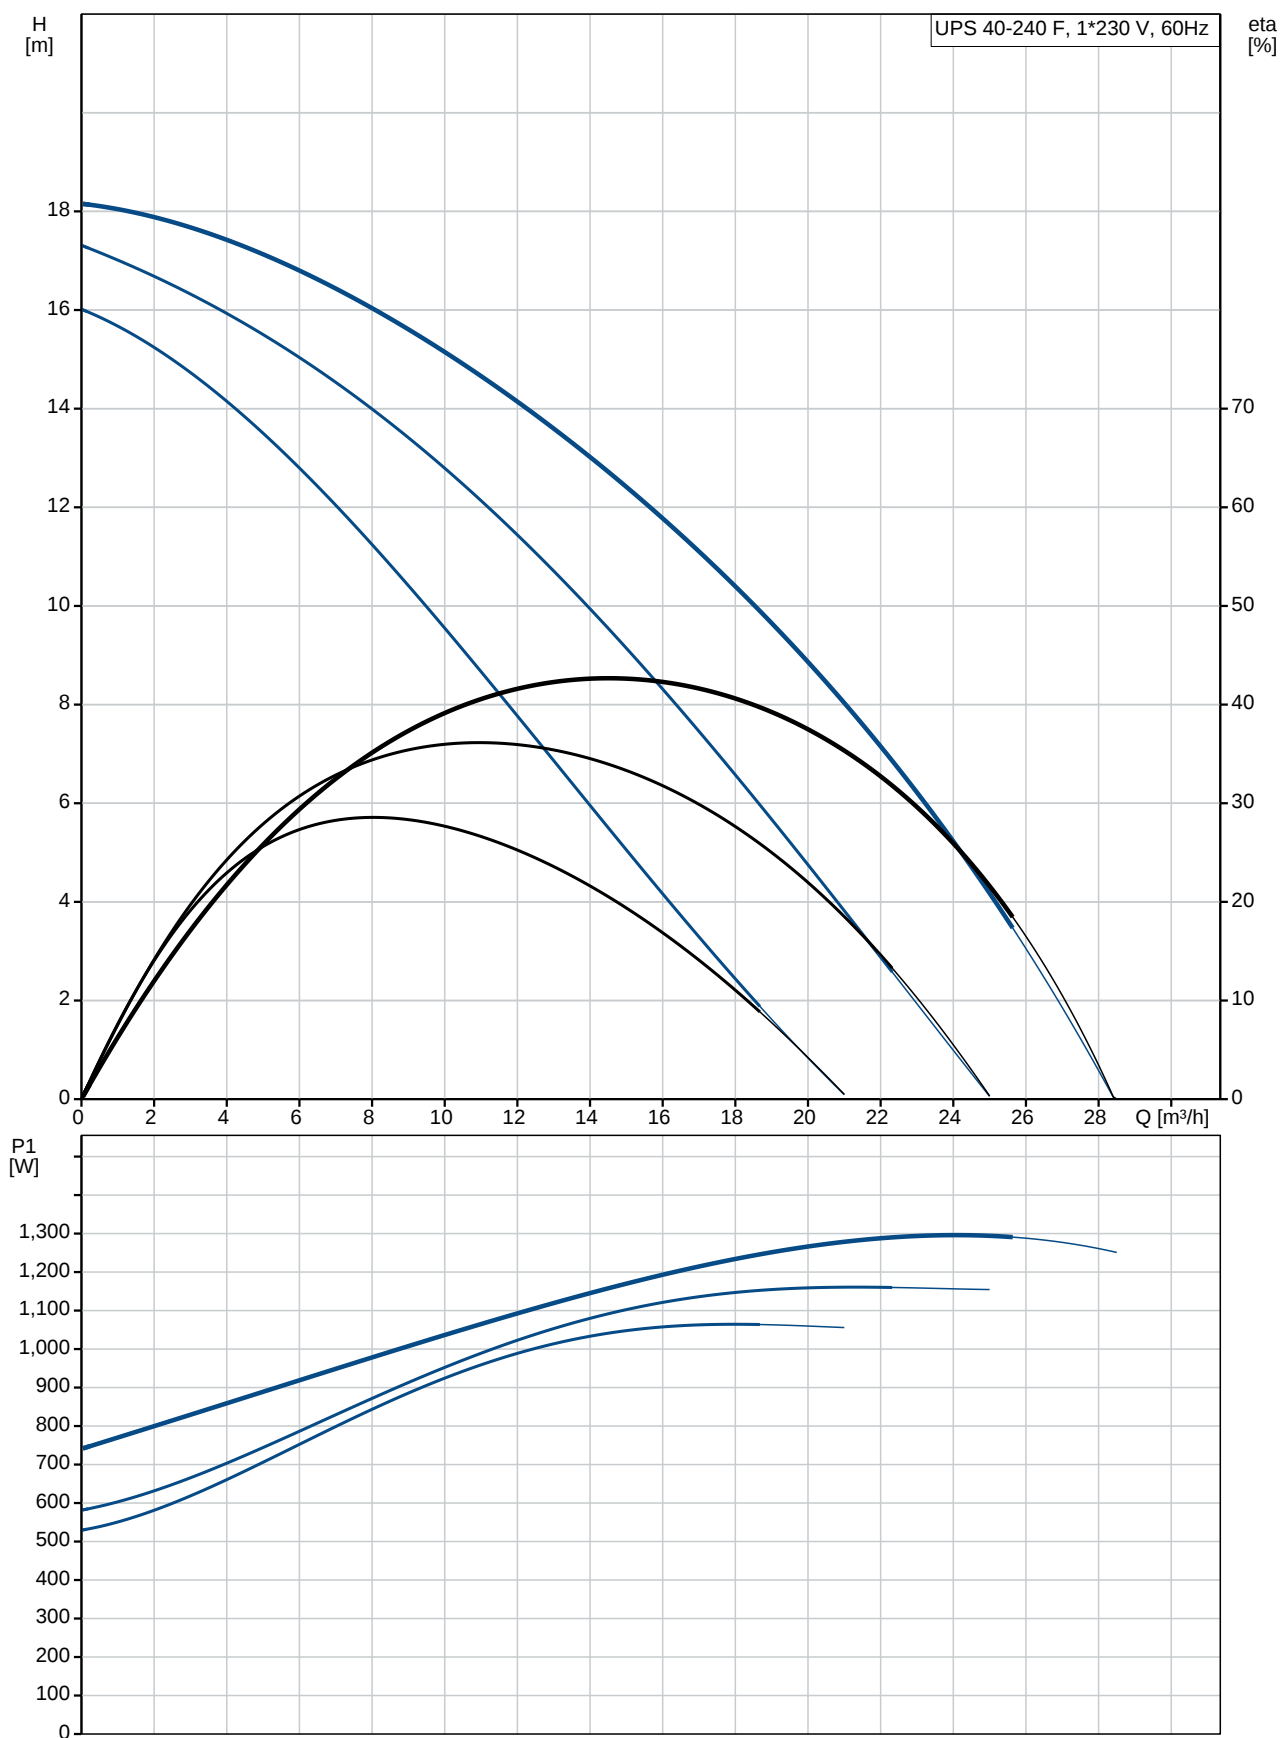

Description	Value
General information:	
Product name:	UPS 40-240 F
Product No:	On request
EAN number:	On request
Technical:	
Speed no:	3
Head max:	240 dm
Approvals on nameplate:	CUL
Model:	C
Materials:	
Pump housing:	Cast iron
	EN-JL1040
	ASTM 35 B - 40 B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Installation:	
Range of ambient temperature:	0 .. 40 °C
Maximum operating pressure:	10 bar
Flange standard:	USA Oval
Type of connection:	F
Pipe connection:	GF 40/43
Pressure rating:	145 psi
Port-to-port length:	342 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 120 °C
Liquid temperature during operation:	60 °C
Density:	983.2 kg/m ³
Electrical data:	
Power input in speed 1:	1100 W
Power input in speed 2:	1200 W
Max. power input:	1350 W
Mains frequency:	60 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	5.15 A
Current in speed 2:	5.55 A
Current in speed 3:	6.2 A
Cos phi in speed 1:	0,93
Cos phi in speed 2:	0,94
Cos phi:	0,95
Capacitor size - run:	30 µF/400 V
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	H
Motor protec:	CONTACT
Thermal protec:	INT.
R a:	6.8 - 8.95 ohm
R s1:	2.02 - 2.65 ohm
R s2:	3.7 - 4.85 ohm
Controls:	
Relay:	Y
Pos term box:	1.30H

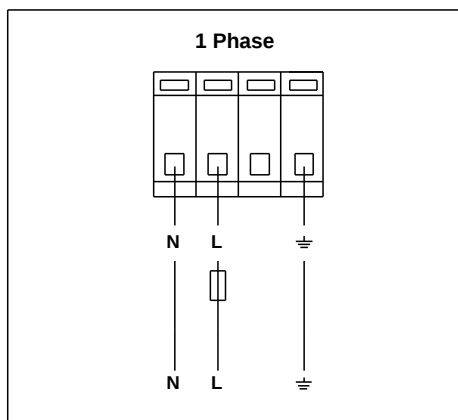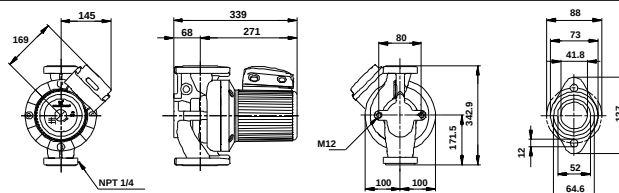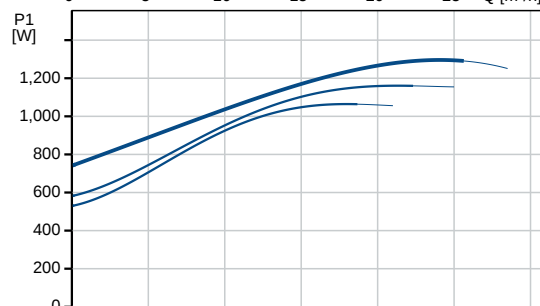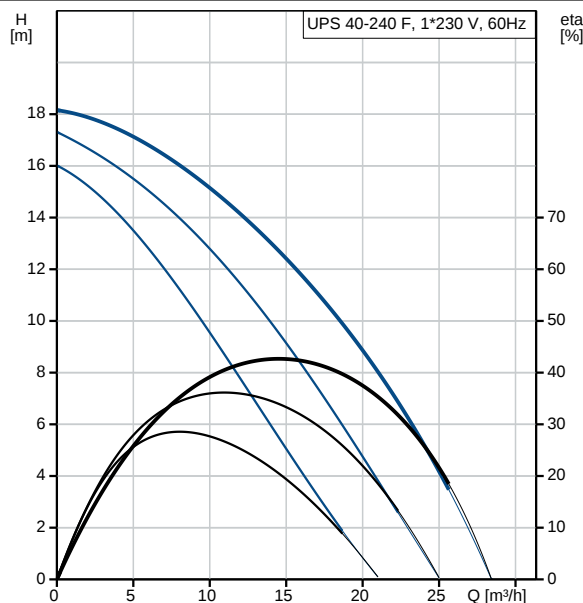



Company name:

Created by:

Phone:

Date:

28/11/2017

Description	Value
Others:	
Net weight:	26.2 kg
Gross weight:	30 kg
Shipping volume:	0.098 m ³
Sales region:	Namreg



Company name:

Created by:





Phone:

Date:

28/11/2017

On request UPS 40-240 F 60 Hz


On request UPS 40-240 F 60 Hz

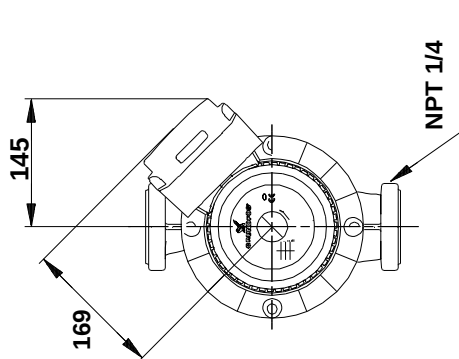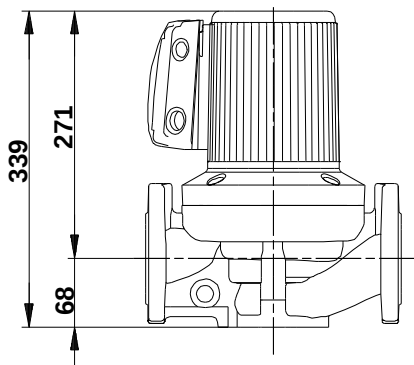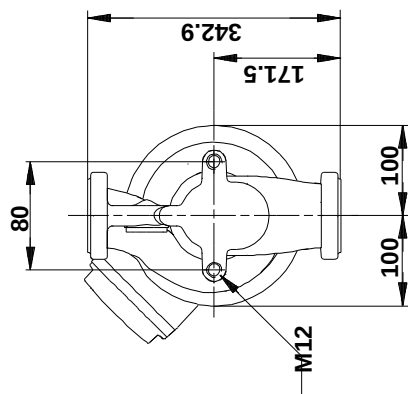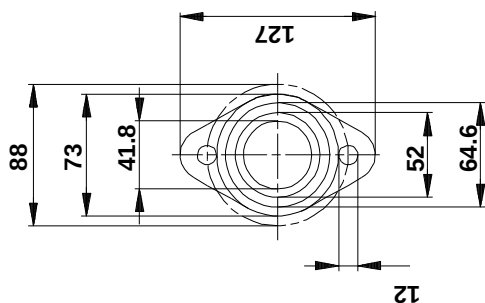

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

On request UPS 40-240 F 60 Hz

1 Phase

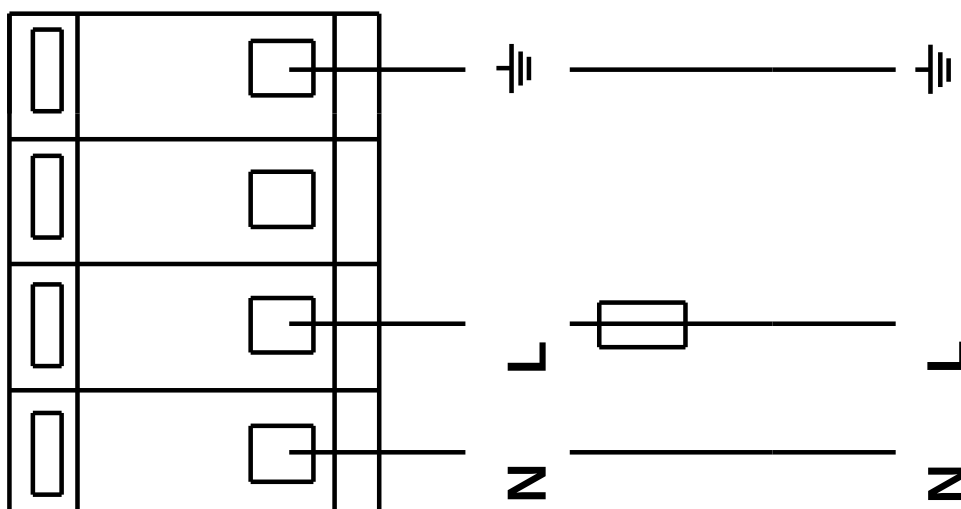

Note! All units are in [mm] unless others are stated.



Company name:

Created by:

Phone:

Date:

28/11/2017

Order Data:


Product name: UPS 40-240 F

Amount: 1

Product No: On request

Total: Price on request

Sectional drawing (A_944781)

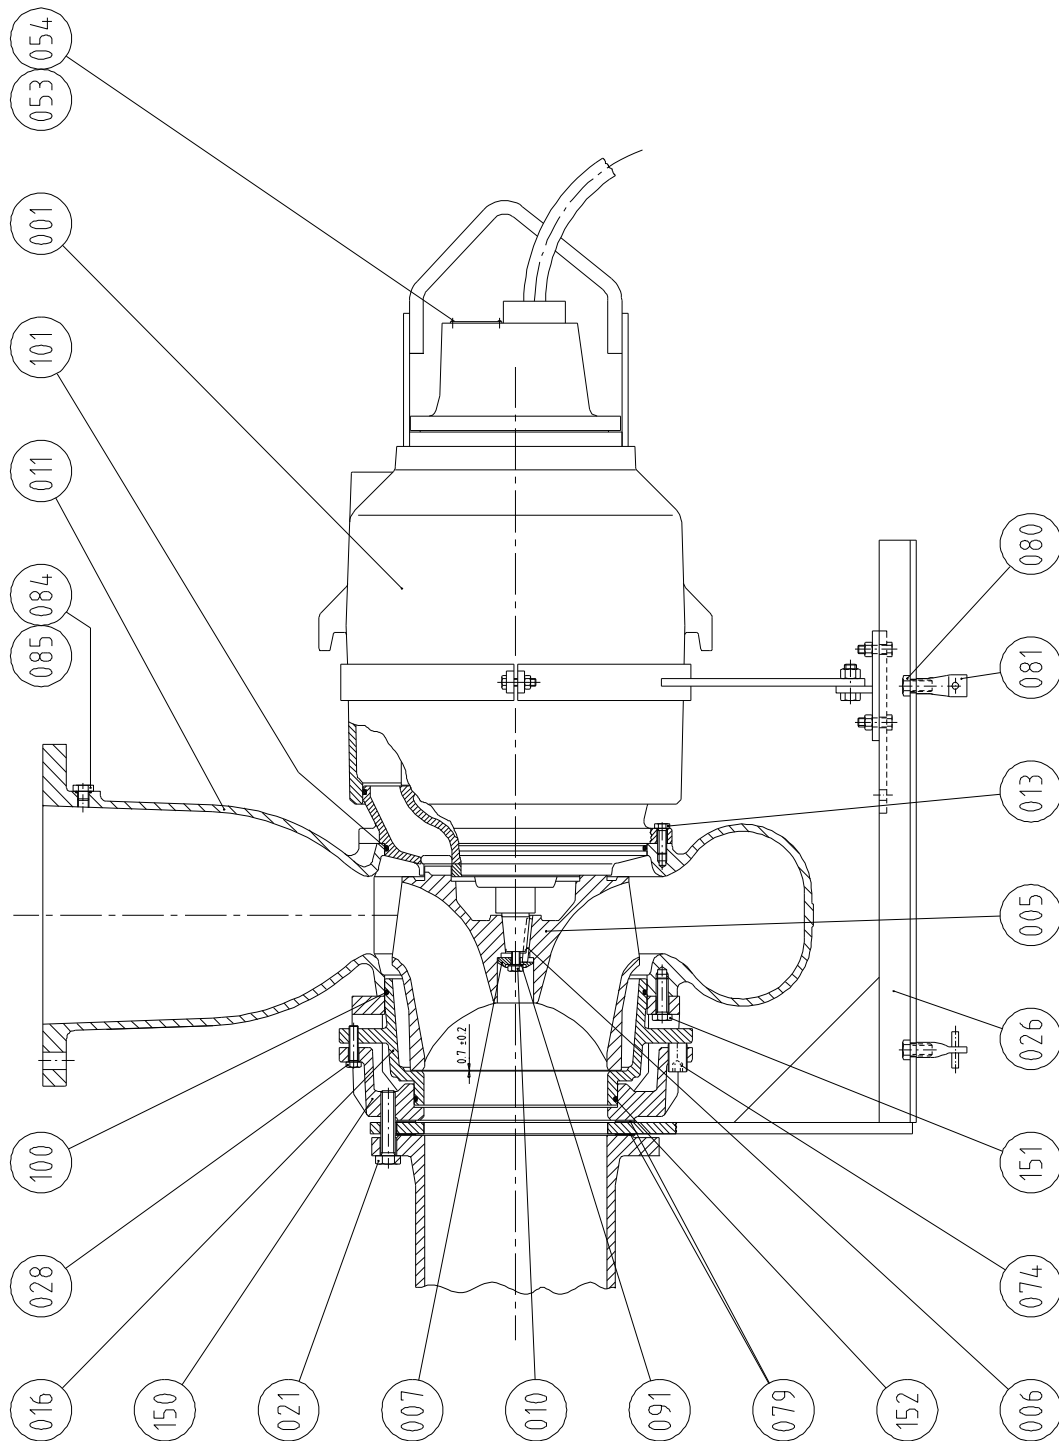

Sectional drawing (A_944775)

