

PROJECT: _____	UNIT TAG: _____	QUANTITY: _____
REPRESENTATIVE: _____	TYPE OF SERVICE: _____	DATE: _____
ENGINEER: _____	SUBMITTED BY: _____	DATE: _____
CONTRACTOR: _____	APPROVED BY: _____	DATE: _____
	ORDER NO.: _____	DATE: _____





UP 53-46 F B

Circulator pumps

Product photo could vary from the actual product


Conditions of Service		Pump Data		Motor Data	
Flow:	57.2 US gpm	Maximum operating pressure:	145.04 psi	Max. power input:	420 W
Head:	14.64 ft	Liquid temperature range:	14 .. 230 °F	Rated voltage:	115/230 V
Efficiency:	38.1 %	Maximum ambient temperature:	104 °F	Main frequency:	60 Hz
Liquid:	Water	Approvals:	CUL	Enclosure class:	X4D
Temperature:	140 °F	Type of connection:	F	Insulation class:	F
NPSH required:	ft	Flange standard:	USA	Motor protection:	CONTACT
Viscosity:		Pipe connection:	GF 53	Thermal protection:	internal
Specific Gravity:	0.985	Product number:	96633592		

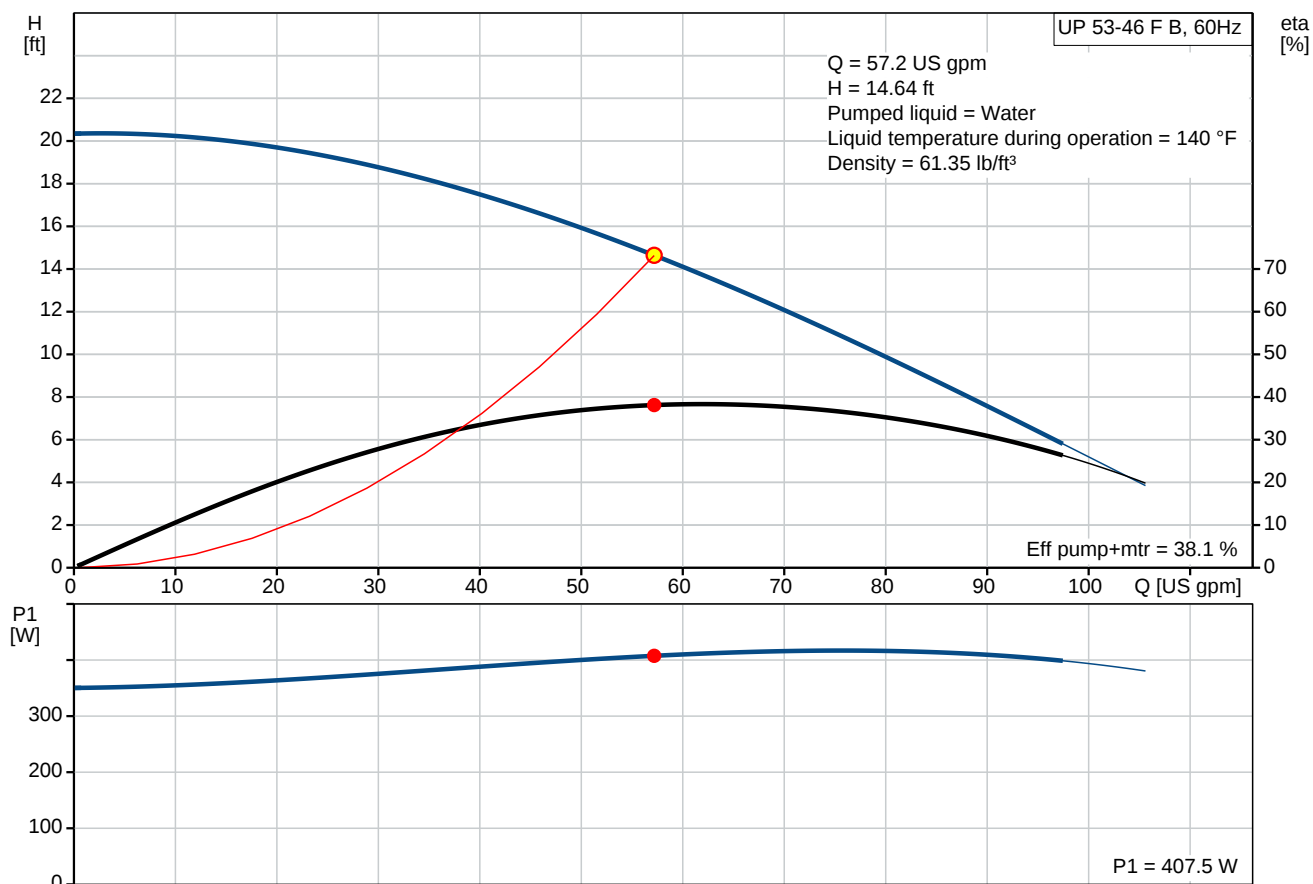

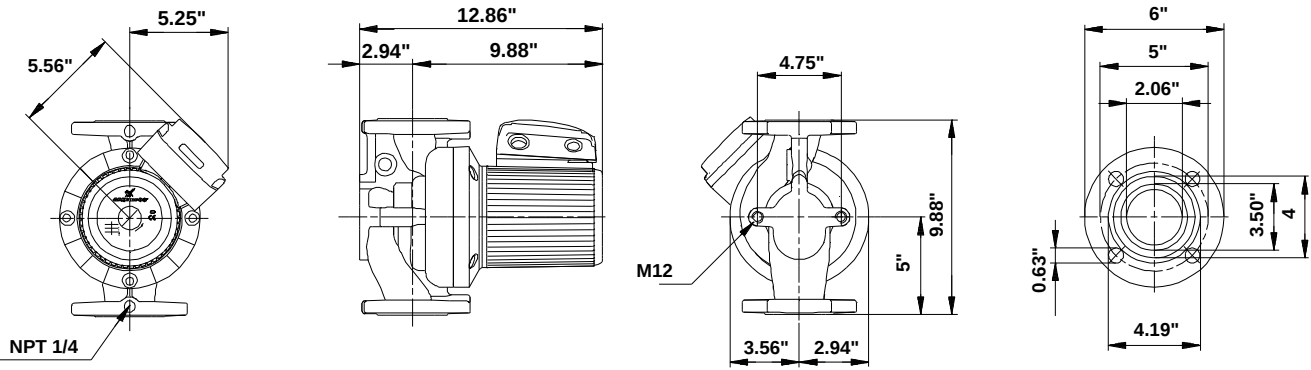

Materials:


Pump housing: Bronze
DIN W.-Nr. 2.1176.01
Impeller: Stainless steel
DIN W.-Nr. 1.4301
AISI 304

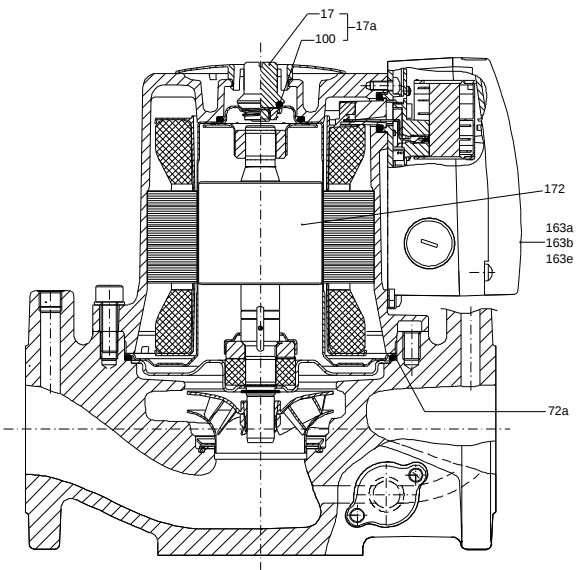



Count	Description
1	UP 53-46 F B  Product photo could vary from the actual product Product No.: 96633592 The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. In order to avoid problems in connection with disposal, great importance has been attached to using as few different materials as possible. The pump is characterized by: * 1 speed motor. * Ceramic radial bearings. * Carbon axial bearing. * Stainless steel rotor can, bearing plate and rotor cladding. * Aluminium alloy stator housing. * Bronze pump housing. * Stator with built-in thermal switch. The motor is a 1-phase motor. The pump is supplied with a standard module in the terminal box. The standard module is to be connected to the mains supply via external contactor. Controls: Relay: with relay Liquid: Pumped liquid: Water Liquid temperature range: 14 .. 230 °F Selected liquid temperature: 140 °F Density: 61.35 lb/ft³ Technical: Actual calculated flow: 57.2 US gpm Resulting head of the pump: 14.64 ft Approvals on nameplate: CUL Materials: Pump housing: Bronze DIN W.-Nr. 2.1176.01 Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304

Count	Description
	Installation: Range of ambient temperature: 32 .. 104 °F Maximum operating pressure: 145.04 psi Flange standard: USA Type of connection: F Pipe connection: GF 53 Pressure stage: 145 psi Port-to-port length: 9 7/8 in Electrical data: Max. power input: 420 W Main frequency: 60 Hz Rated voltage: 1 x 115/230 V Current in speed 3: 3.9/2.1 A Cos phi: 0.90 Capacitor size - run: 50 µF/240 V Enclosure class (IEC 34-5): X4D Insulation class (IEC 85): F Others: Net weight: 49.2 lb Gross weight: 57.1 lb Shipping volume: 2.12 ft³ Country of origin: DE Custom tariff no.: 8413.70.2015





96633592 UP 53-46 F B 60 Hz

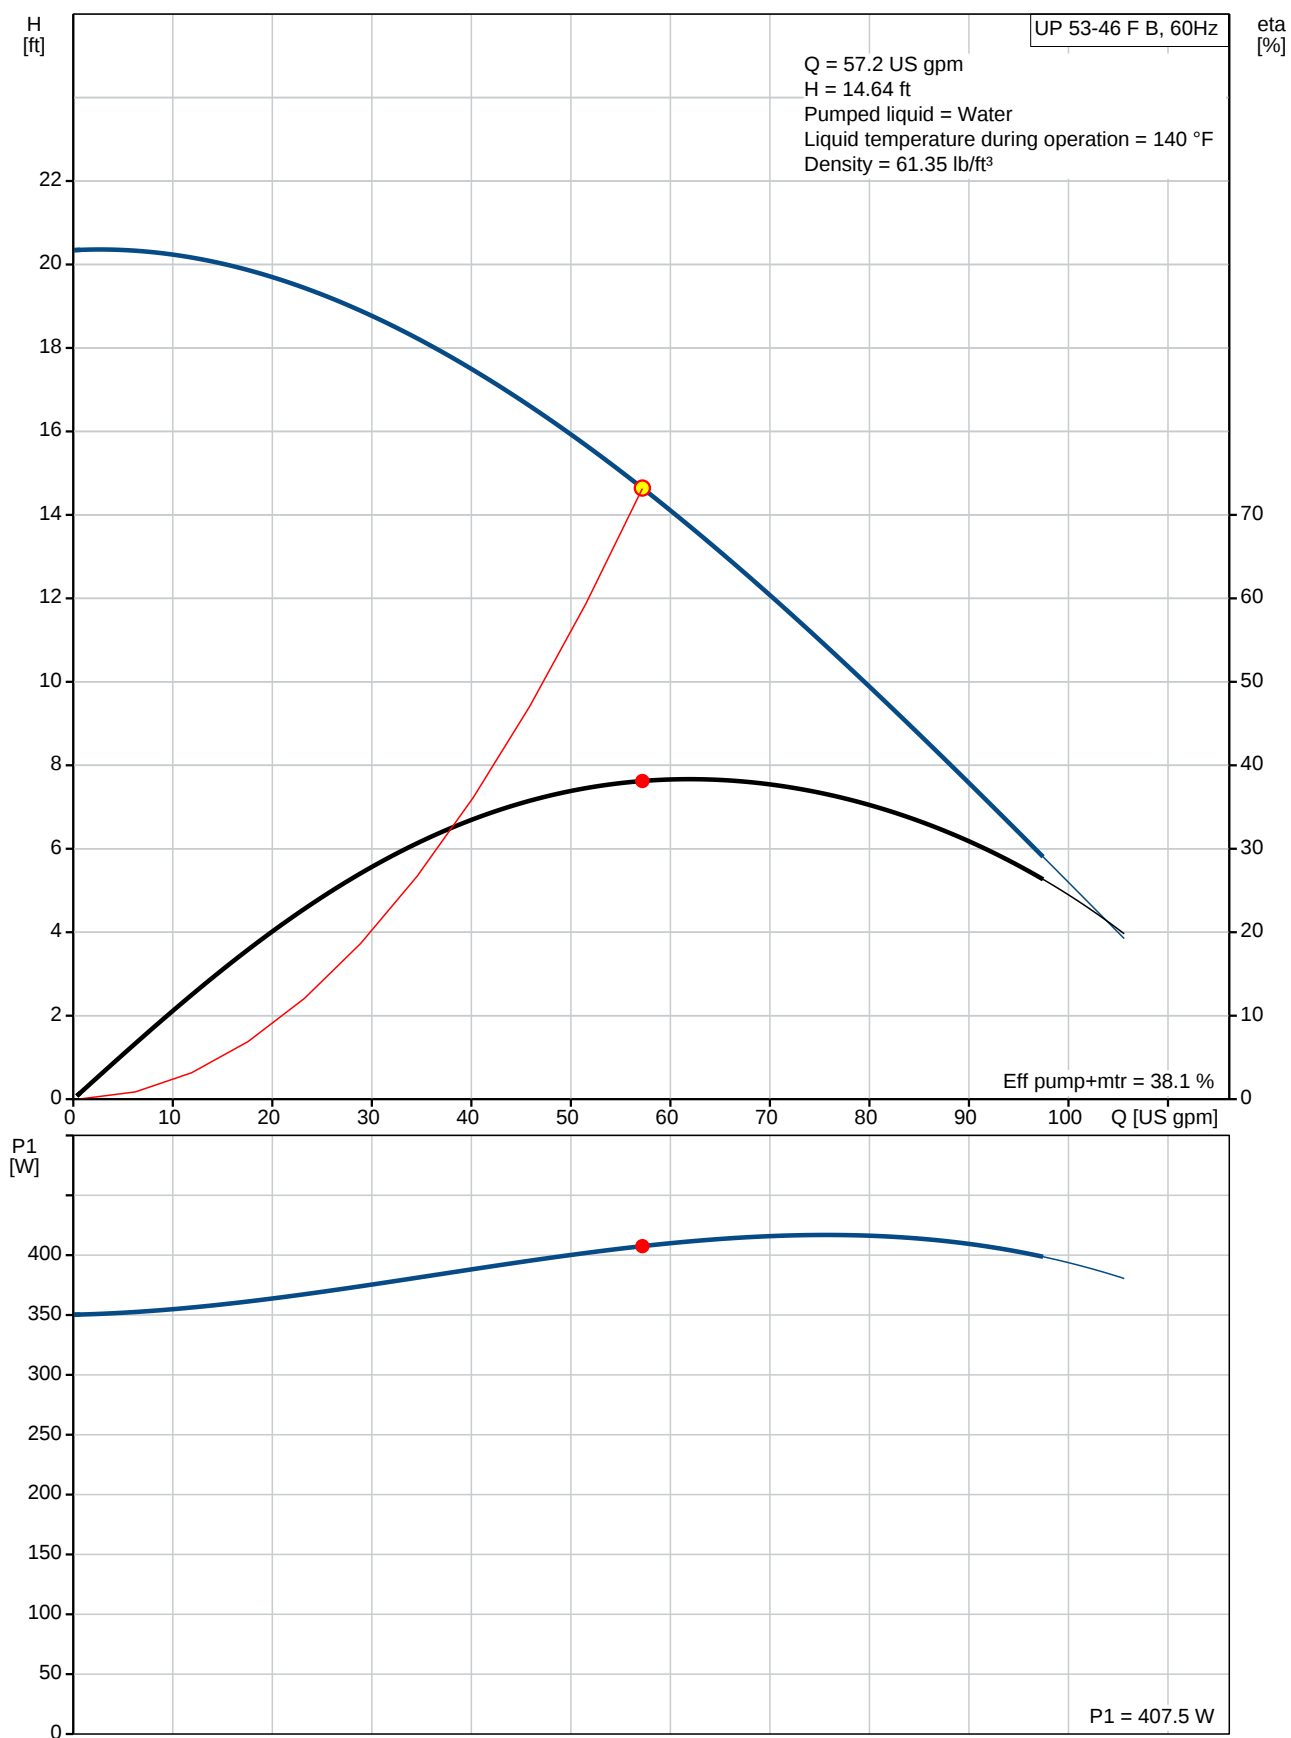

Description	Value
General information:	
Product name:	UP 53-46 F B
Product No.:	96633592
EAN:	5700835482525
Technical:	
Speed Number:	1
Actual calculated flow:	57.2 US gpm
Resulting head of the pump:	14.64 ft
Head max:	15.09 ft
Approvals on nameplate:	CUL
Model:	C
Materials:	
Pump housing:	Bronze
	DIN W.-Nr. 2.1176.01
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Installation:	
Range of ambient temperature:	32 .. 104 °F
Maximum operating pressure:	145.04 psi
Flange standard:	USA
Type of connection:	F
Pipe connection:	GF 53
Pressure stage:	145 psi
Port-to-port length:	9 7/8 in
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	14 .. 230 °F
Selected liquid temperature:	140 °F
Density:	61.35 lb/ft³
Electrical data:	
Max. power input:	420 W
Main frequency:	60 Hz
Rated voltage:	1 x 115/230 V
Current in speed 3:	3.9/2.1 A
Cos phi:	0.90
Capacitor size - run:	50 µF/240 V
Enclosure class (IEC 34-5):	X4D
Insulation class (IEC 85):	F
Motor protection:	CONTACT
Thermal protec:	internal
Controls:	
Relay:	with relay
Pos term box:	1.30H
Others:	
Net weight:	49.2 lb
Gross weight:	57.1 lb
Shipping volume:	2.12 ft³
Sales region:	Namreg
Country of origin:	DE
Custom tariff no.:	8413.70.2015

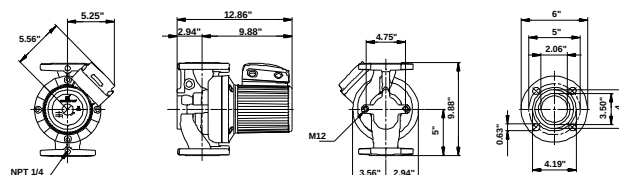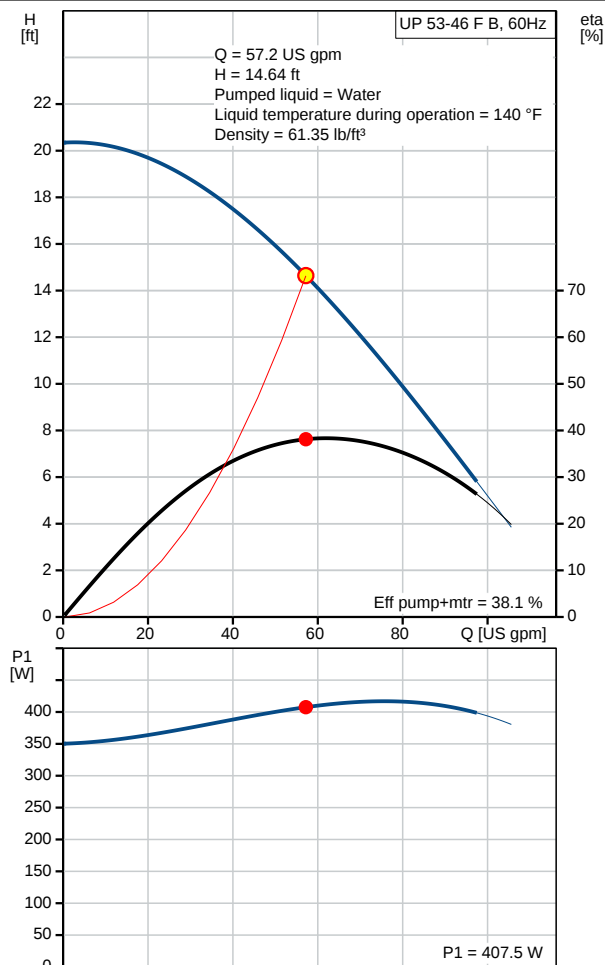

96633592 UP 53-46 F B 60 Hz

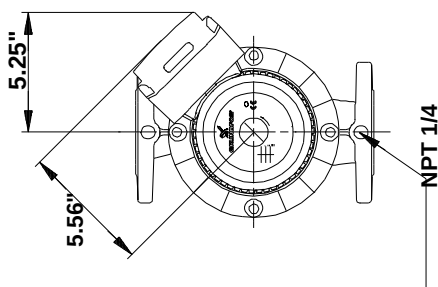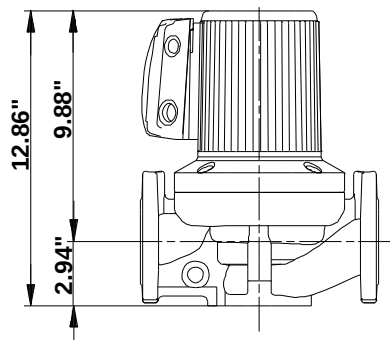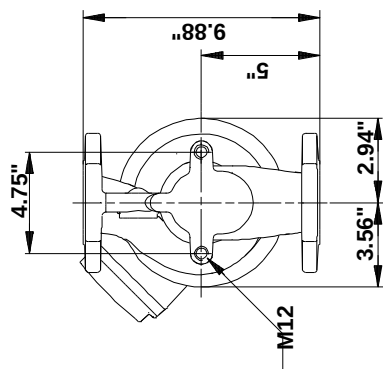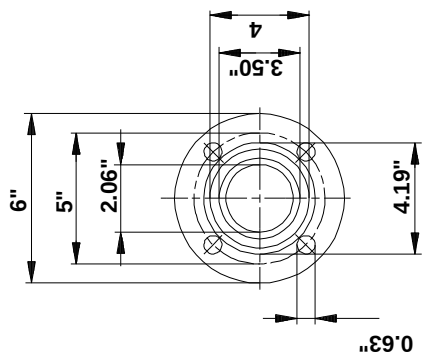

Note! All units are in [in] unless otherwise stated.
Disclaimer: This simplified dimensional drawing does not show all details.



Company name:

Created by:

Phone:

Date:

4/11/2019

Order Data:


Product name: UP 53-46 F B

Amount: 1


Product No.: 96633592

Total: Price on request

(TM010410 3905)

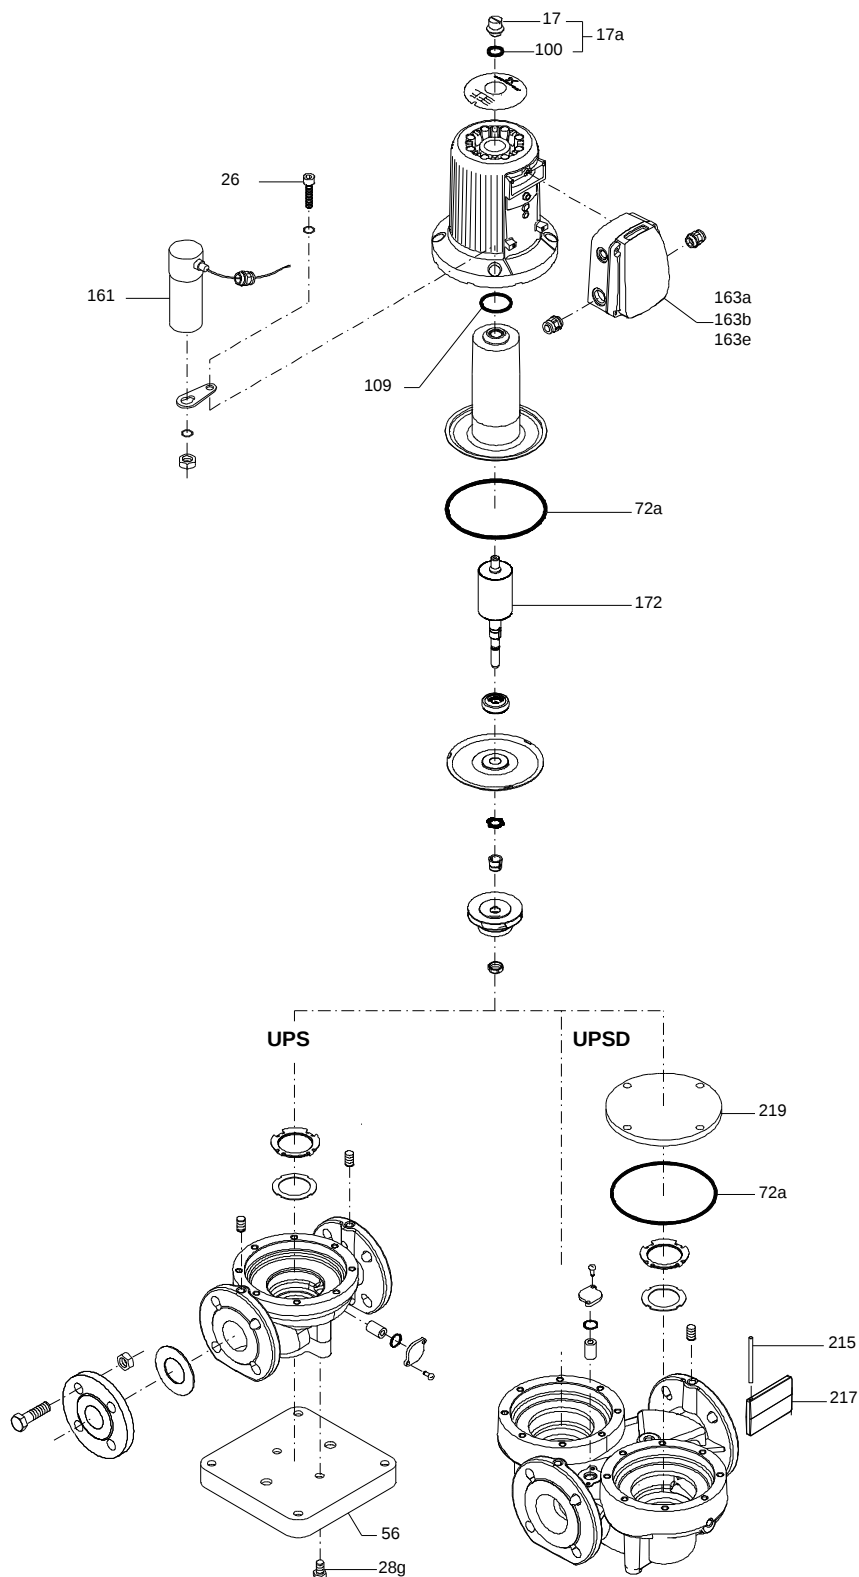

(TM010371 3905)

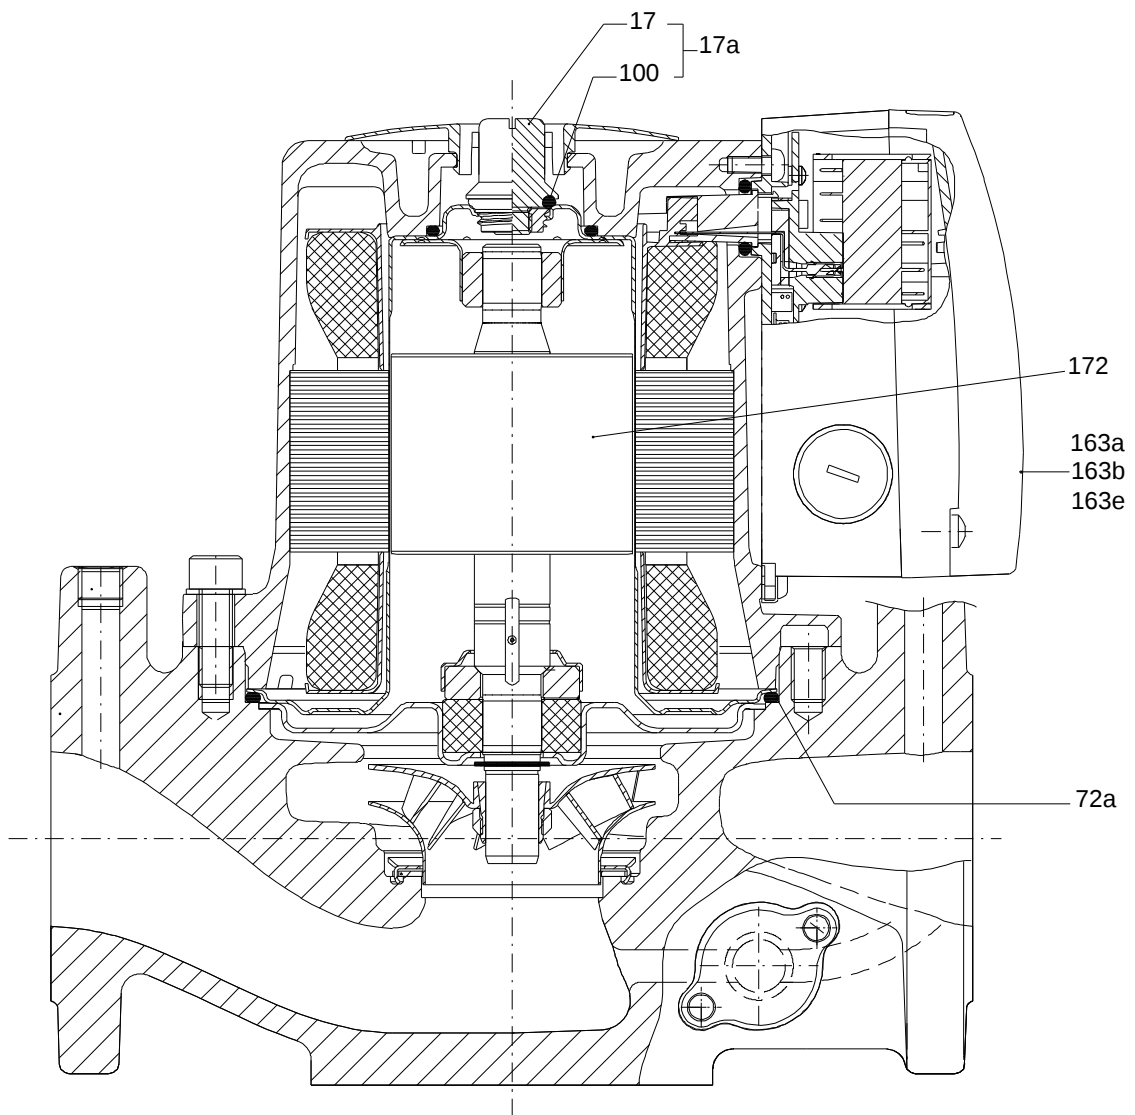

TM010371



Company name:

Created by:

Phone:

Date:

4/11/2019

Parts list UP 53-46 F B, Prod number 96633592

Produced After 0646 (production year and week number)

Position	Description	Annotation	Classification data	Part No.	Count	Unit
163b	Terminal box cpl.		Designation: 50 UF		1	pcs