
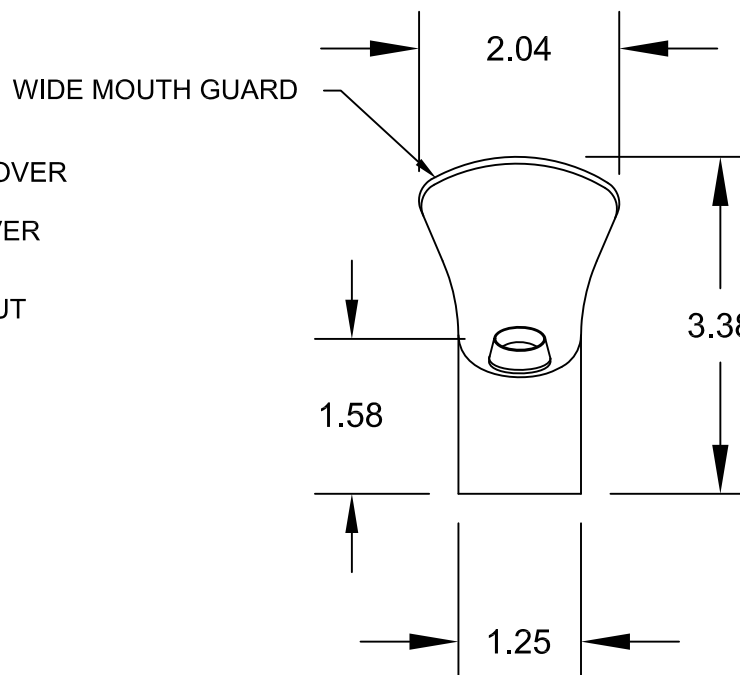
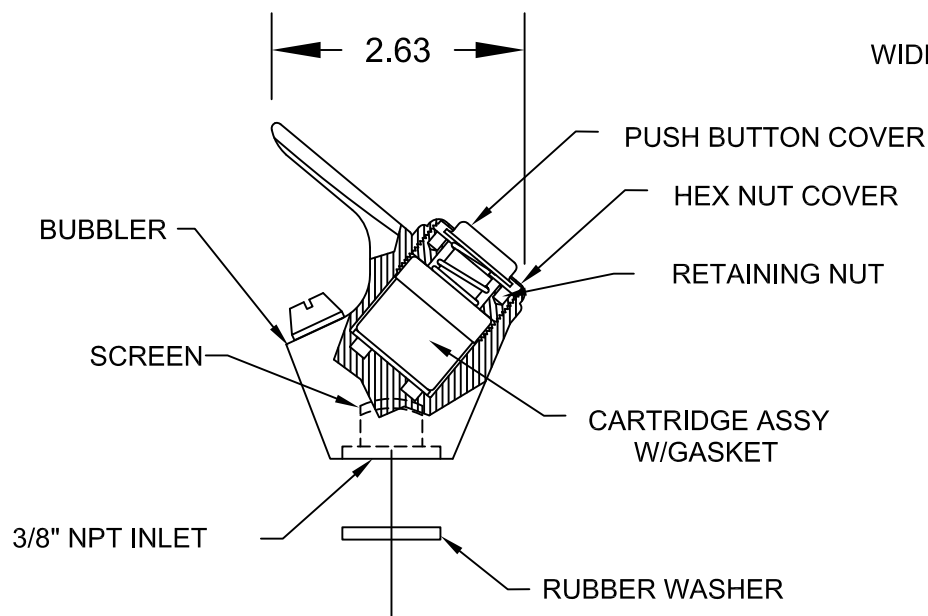


NOTES:

TO ADJUST FLOW:

1. REMOVE HEX NUT COVER AND PUSH BUTTON COVER.
2. ADJUST WITH SCREWDRIVER: CLOCKWISE TO INCREASE FLOW & COUNTER-CLOCK WISE TO DECREASE FLOW.
3. IF DESIRED FLOW IS NOT OBTAINED, CLEAN SCREEN AT INLET.
4. REPLACE PUSH BUTTON COVER AND HEX NUT COVER.

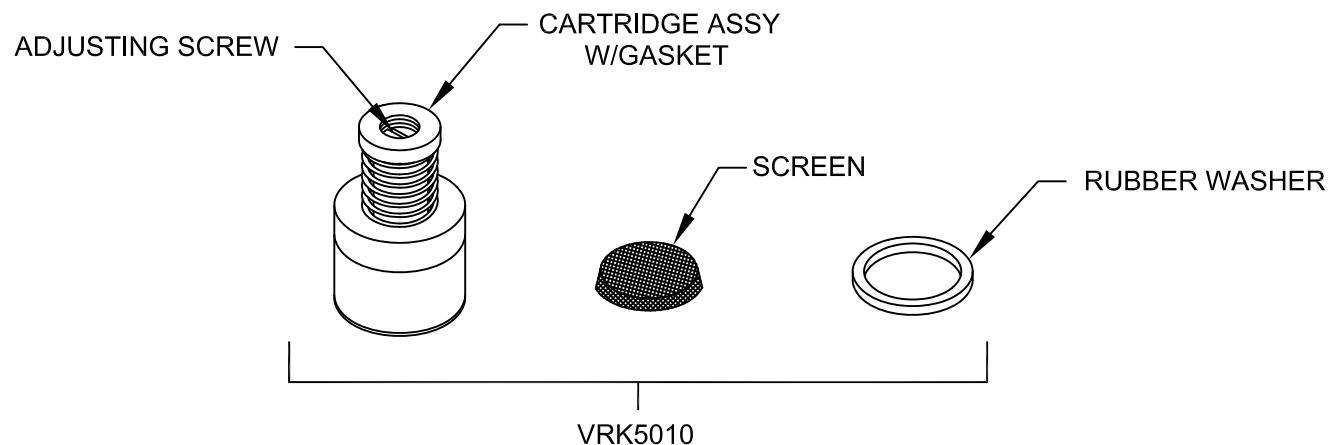

				1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM			
ECN NO. 4215	REVISED PER ECN: 4673	BY: HM	MODEL(S)		5010SS		PART NUMBER
DRAWN: SLS	DATE: 01/14/99	CHKD:					0002075200.D
APPROVED:	DATE:						DRAWING NO. 15851A00
			SCALE: 1:1		DRAWING TYPE: INSTALLATION		REV 1
							SIZE: A SHEET 1 OF 1