


www.heatlink.com

Application


Floor heating PEX coil – facilitates installer's work during installation of floor heating tubing. It improves comfort and work effiiency as well as installer's mobility. A PEX coil is placed on the reel, which unwinds along with installation of consecutive sections of the heating system.

- There are numerous advantages of using the decoiler, e.g.:
- Installer does not have to carry the PEX coil while installing floor heating tubing.
- Floor heating installation can be prepared by one person.
- Floor heating tubing placed on the decoiler does not fold and does not tangle.





The PEX Dispenser is made of high quality galvanized steel sections, which are connected using wing screws. Thus the structure of the decoiler is durable and guarantees long-time operation without maintenance. Assembling and disassembling the dispenser is quick and easy. There are only a few steps and the use of wing screws means that additional tools aren't required.

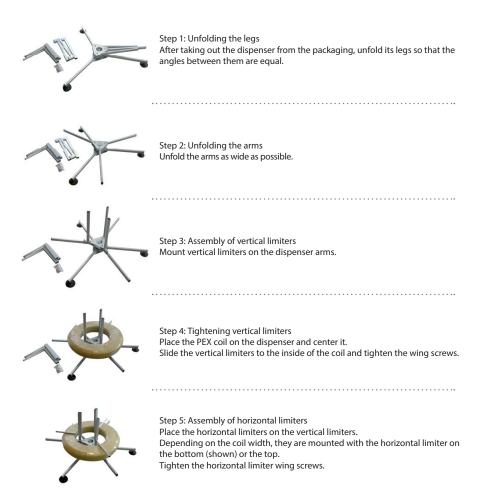

Disassembly of the dispenser is just as easy as assembling, following the above steps in reverse order.

Specifications

- PEX diameter: up to 3/4"
- Max coil weight: 114.6 lb (52 kg)
- Max coil height: 24" (60 cm)
- Min inner coil diameter: 14-1/4" (36 cm)
- Max outer coil diameter: 44" (112 cm)

