

|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
| Job or Customer :                                                                 |         |
| Location :                                                                        |         |
| Engineer :                                                                        |         |
| <input type="checkbox"/> Complies with Spec<br><input type="checkbox"/> Alternate | Notes : |
| Contractor :                                                                      |         |
| HeatLink Rep :                                                                    |         |
| Submitted By :                                                                    | Date :  |
| Approved By :                                                                     | Date :  |
| P.O. Number :                                                                     | Date :  |

### Description

Designed to create a watertight seal, the Press Sleeve Tool has a toggle action handle and is available in four sizes. Easy to load and simple to press, the pressed stainless steel sleeve provides a finished appearance on the transition from the end of the tubing to the insert fitting.

### Technical Data

Material - Jaws: ..... Metal  
 Material - Handles: ..... Metal with foam grips  
                                                                                          Composite plastic with foam grips

| Qty | Stk. # | Sleeve Size | DIM X      | Dimensions         |                   |                 | Weight            |
|-----|--------|-------------|------------|--------------------|-------------------|-----------------|-------------------|
|     |        |             |            | A                  | B                 | C               |                   |
|     | 11305  | ½"          | 7-½" ± ¼"  | 4.9"<br>125.5 mm   | 13.6"<br>345.5 mm | 1-¾"<br>31.8 mm | 3.0 lb<br>1.36 kg |
|     | 11322  | ¾"          | 8-½" ± ¼"  | 4.9"<br>125.5 mm   | 14.1"<br>358.1 mm | 1-¾"<br>31.8 mm | 3.0 lb<br>1.36 kg |
|     | 11325  | ½" & ¾"     | 9-½" ± ¼"  | 4-¾"<br>120.7 mm   | 16-¼"<br>412.8 mm | ⅞"<br>22.2 mm   | 4.6 lb<br>2.1 kg  |
|     | 11328  | 1"          | 13" ± ¼"   | 4-7⁄8"<br>123.8 mm | 19-⅜"<br>492.1 mm | ⅞"<br>22.2 mm   | 5.5 lb<br>2.5 kg  |
|     | 11335  | 1-¼"        | 12-½" ± ¼" | 5-⅝"<br>130.2 mm   | 19-⅝"<br>485.8 mm | ⅞"<br>22.2 mm   | 6.0 lb<br>2.7 kg  |
|     | 11341  | 1-½"        | 12-¾" ± ¼" | 4-7⁄8"<br>123.8 mm | 19-¾"<br>501.6 mm | 1"<br>25.4 mm   | 6.0 lb<br>2.7 kg  |


### Installation

Installation of the stainless steel press sleeves must follow all of HeatLink's instructions and guidelines, found in the Potable Water Systems Installation Guide (L3235).

### Related Documents

- Potable Water Systems Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

**11305 & 11322 Composite Handled Tools**

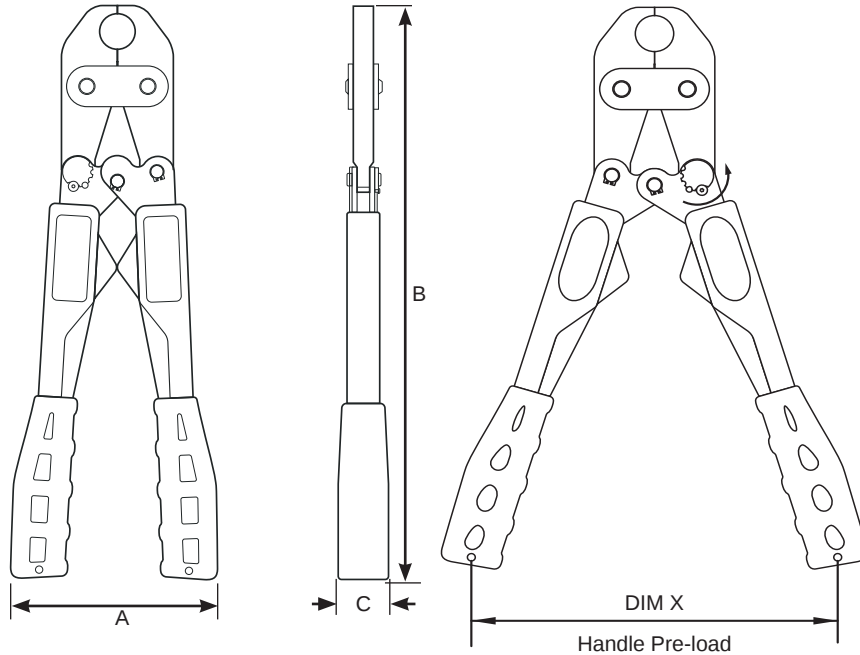

**11325, 11328, 11335, 11341 Metal Handled Tools**

