

|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
| Job or Customer :                                                                 |         |
| Location :                                                                        |         |
| Engineer :                                                                        |         |
| <input type="checkbox"/> Complies with Spec<br><input type="checkbox"/> Alternate | Notes : |
| Contractor :                                                                      |         |
| HeatLink Rep :                                                                    |         |
| Submitted By :                                                                    | Date :  |
| Approved By :                                                                     | Date :  |
| P.O. Number :                                                                     | Date :  |

### Description

High Performance Polymer PEX insert plugs.

### Listings

cNSFus-pw

### Standards

ASTM F877  
ASTM F2159  
CSA B137.5  
NSF/ANSI 14  
NSF/ANSI 61  
NSF/ANSI 372


### Technical Data

Material:..... Modified Polyphenylsulfone  
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

### Codes

IAPMO UPC

### Dimensional Drawing

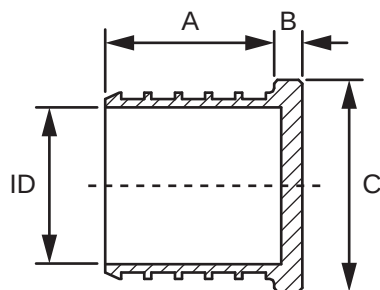

### Installation

Installation must follow all of HeatLink's instructions and guidelines.

### Related Documents

- HeatLink Limited Plumbing Warranty

| Qty | Stk # | Size   | Dimension, in / (mm) |               |                | ID             | Weight,<br>lb / (kg) |
|-----|-------|--------|----------------------|---------------|----------------|----------------|----------------------|
|     |       |        | A                    | B             | C              |                |                      |
|     | 15005 | ½" PEX | 0.71<br>(18.0)       | 0.13<br>(3.2) | 0.63<br>(16.0) | 0.31<br>(8.0)  | 0.005<br>(0.002)     |
|     | 15022 | ¾" PEX | 0.71<br>(18.0)       | 0.13<br>(3.2) | 0.83<br>(21.0) | 0.46<br>(11.7) | 0.009<br>(0.004)     |
|     | 15028 | 1" PEX | 0.85<br>(21.7)       | 0.14<br>(3.5) | 0.98<br>(25.0) | 0.61<br>(15.5) | 0.015<br>(0.007)     |

*This page is intentionally blank.*