

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX Insert × MNPT adapters.

Listings

cNSFus-pw

Standards

ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372


Technical Data

Material:..... Modified Polyphenylsulfone
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Codes

IAPMO UPC

Dimensional Diagram

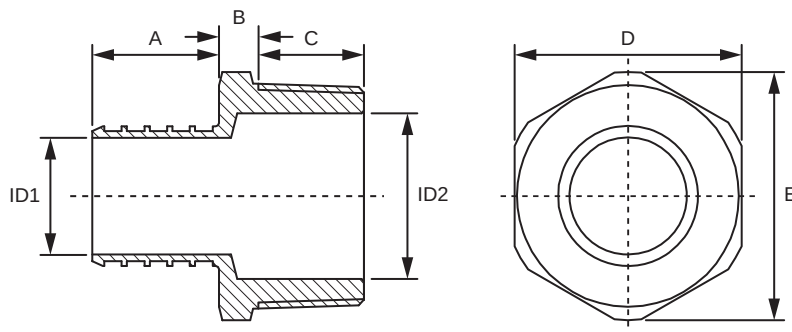

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

Qty	Stk. #	Size	Dimension, in / (mm)					ID1	ID2	Weight, lb / (kg)
			A	B	C	D	E			
	17505	½" PEX × ½" MNPT	0.70 (17.8)	0.35 (8.8)	0.64 (16.1)	0.88 (22.3)	1.01 (25.8)	0.32 (8.0)	0.50 (12.7)	0.016 (0.007)
	17552	½" PEX × ¾" MNPT	0.70 (17.8)	0.35 (8.9)	0.63 (16.0)	1.06 (26.8)	1.22 (31.0)	0.32 (8.0)	0.76 (19.2)	0.019 (0.009)
	17525	¾" PEX × ½" MNPT	0.70 (17.8)	0.37 (9.3)	0.64 (16.1)	0.88 (22.3)	1.01 (25.8)	0.46 (11.7)	0.50 (12.7)	0.019 (0.009)
	17522	¾" PEX × ¾" MNPT	0.70 (17.8)	0.39 (9.8)	0.63 (16.0)	1.06 (26.8)	1.22 (31.0)	0.46 (11.7)	0.76 (19.2)	0.022 (0.010)

This page is intentionally blank.