

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX Insert × FNPT swivel adapters.

Listings

cNSFus-pw

Standards

ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Technical Data


Material:..... Modified Polyphenylsulfone
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Codes

IAPMO UPC

Qty	Stk #	Size	Dimension		C	ID	Weight
			A	B			
	17755	1/2" PEX × 1/2" FNPT Faucet Adapter	1.46" (37.3 mm)	0.74" (19.0 mm)	1/2" NPSM	0.315" (8 mm)	10.5 g (0.37 oz)
	17705	1/2" PEX × Ballcock/Closet FNPT	1.7" (43.18 mm)	0.87" (22.09 mm)	7/8" Ballcock	0.315" (8 mm)	10.5 g (0.37 oz)
	17722	3/4" PEX × 3/4" FNPT	1.58" (40.3 mm)	0.86" (22.0 mm)	3/4" NPSM	0.46" (11.6 mm)	19 g (0.67 oz)

Dimension Diagram

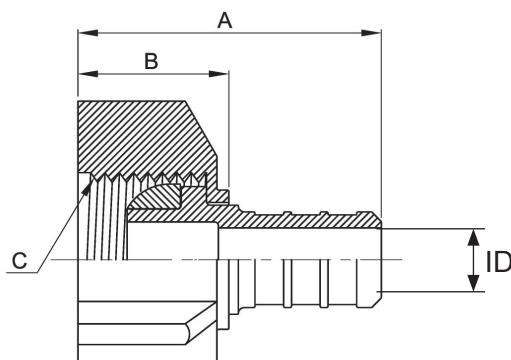

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty.

This page is intentionally blank.