

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX Insert × FNPT swivel elbow adapters.

Listings

cNSFus-pw

Standards

ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Technical Data


Material:..... Modified Polyphenylsulfone
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Codes

IAPMO UPC

Qty	Stk #	Size	Dimension		C	D	ID	Weight
			A	B				
	18605	1/2" PEX × 1/2" FNPT	1.44" (36.7 mm)	1.16" (29.5 mm)	0.74" (19 mm)	1/2" NPSM	0.315" (8 mm)	12.5 g (0.44 oz)

Dimension Diagram

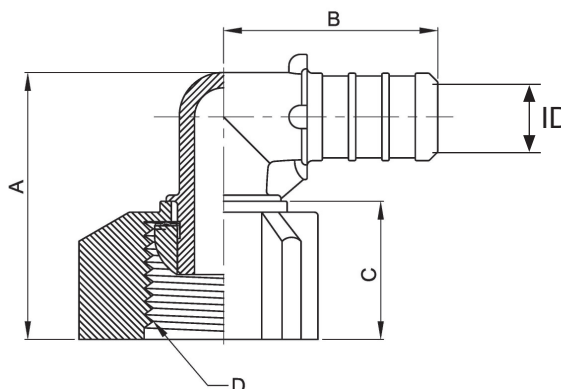

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty.

This page is intentionally blank.