

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX Insert couplings.

Listings

cNSFus-pw

Standards

ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372


Technical Data

Material:..... Modified Polyphenylsulfone
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Codes

IAPMO UPC

Dimension Diagram

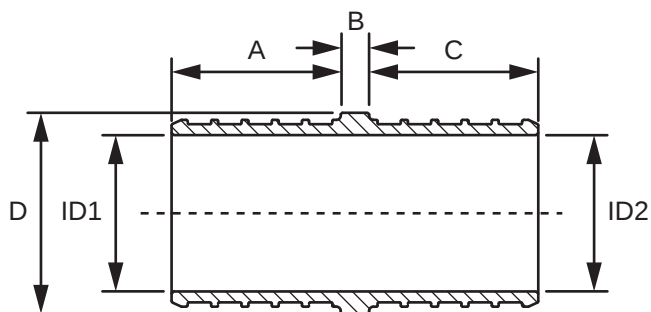

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

PEX Insert Couplings

Qty	Stk. #	Size	Dimension, in / (mm)						Weight, lb / (kg)
			A	B	C	D	ID1	ID2	
	19005	½" × ½" PEX	0.71 (18.0)	0.10 (2.6)	0.71 (18.0)	0.63 (16.0)	0.31 (8.0)	0.31 (8.0)	0.007 (0.003)
	19022	¾" × ¾" PEX	0.71 (18.0)	0.10 (2.6)	0.71 (18.0)	0.83 (21.0)	0.46 (11.7)	0.46 (11.7)	0.013 (0.006)
	19028	1" × 1" PEX	0.86 (21.8)	0.12 (3.0)	0.86 (21.8)	0.98 (25.0)	0.61 (15.5)	0.61 (15.5)	0.023 (0.010)

PEX Insert Reducing Couplings

Qty	Stk. #	Size	Dimension, in / (mm)						Weight, lb / (kg)
			A	B	C	D	ID1	ID2	
	19225	¾" × ½" PEX	0.71 (18.0)	0.10 (2.6)	0.71 (18.0)	0.83 (21.0)	0.46 (11.7)	0.31 (8.0)	0.010 (0.005)
	19282	1" × ¾" PEX	0.86 (21.8)	0.12 (3.0)	0.71 (18.0)	0.98 (25.0)	0.61 (15.5)	0.46 (11.7)	0.019 (0.009)

This page is intentionally blank.