

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

**Description**

Plastic fitting is installed into the bottom of the manifold module and is held in place by the nut. The tubing is then pressed on to this fitting. Comes with o-ring. SS press sleeves sold separately. *Not for potable water use.*

**Technical Data**


Material:..... Polysulfone  
 Working Pressure:..... 87 psi (6 bar)  
 Tested Pressure:..... 232 psi (16 bar)  
 Maximum Temperature:..... 195°F (90°C)

**Standards / Listings**

Manufactured to B137.5

Qty	Stk #	Tubing Size	Dimension				Weight
			A	B	C	D	
	23015	½"	1.1" (29 mm)	1.8" (47.2 mm)	n/a	n/a	12 g (0.4 oz)
	23032	¾"	1.1" (29 mm)	1.8" (47.2 mm)	1.15" (29.2 mm)	1.7" (42.8 mm)	34 g (1.2 oz)

**Dimension Diagram**

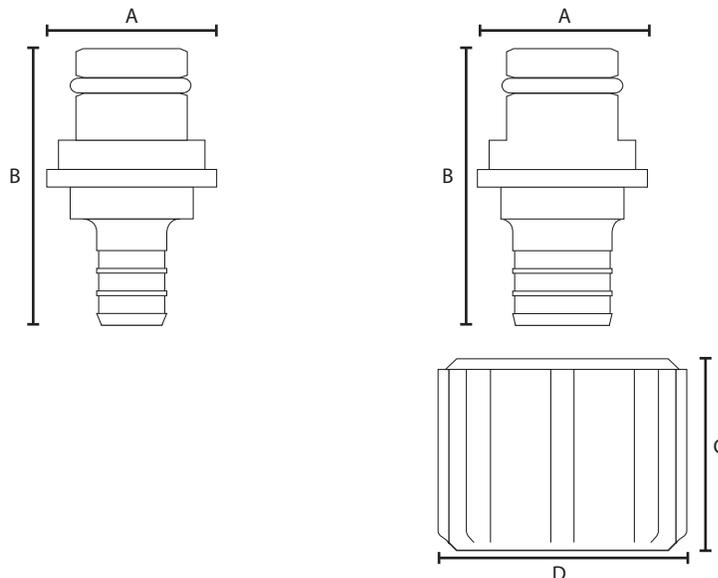

**Installation**

Installation must follow all of HeatLink's instructions and guidelines.

**Related Documents**

- HeatLink Limited Heating Warranty.

*This page is intentionally blank.*