

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

No lead brass straight ball valve for 3/4" tubing.

Technical Data

Material:..... No Lead Eco Brass - C69300
Working Pressure:..... 100 psi maximum
Tested Pressure:..... 100 psi
Maximum Temperature:..... 82°C / 180°F

Listings


IAPMO UPC
CSA

Standards

ANSI/NSF 61
ANSI/NSF 372
ASME A112.18.1/CSA B125.1
ASTM F1807
ASTM F877

Qty	Stk. #	Size	Dimension			ID	Approx Cv	Weight
			A	B	C			
	23422NL	3/4" PEX × 3/4" MNPT	3.1" (79.1mm)	1.4" (34.5mm)	1.0" (25.9mm)	0.53" (13.5 mm)	6.0	250 g (8.8 oz)

Dimensional Diagram

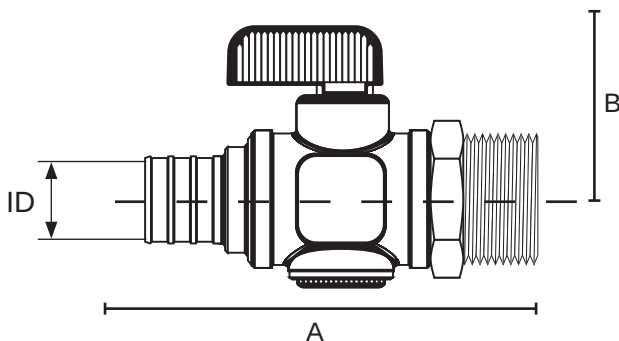

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

This page is intentionally blank.