

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

½" PEX × ⅜" O.D. compression, nickel plated angle ball valve.

Technical Data

Material:..... No Lead (Eco) Brass - C69300
Working Pressure:..... 100 psi maximum
Tested Pressure:..... 100 psi
Maximum Temperature:..... 82°C / 180°F

Listings


IAPMO UPC
CSA

Standards

ANSI/NSF 61
ANSI/NSF 372
ASME A112.18.1/CSA B125.1
ASTM F1807
ASTM F877

Qty	Stk. #	Size	Dimension		ID	Approx Cv	Weight
			A	B			
	23605NL	½" PEX × ⅜" O.D.	2.7" (68.5mm)	1.0" (25.4mm)	0.35" (8.9 mm)	1.8	3.45 oz (98.0 g)

Dimensional Diagram

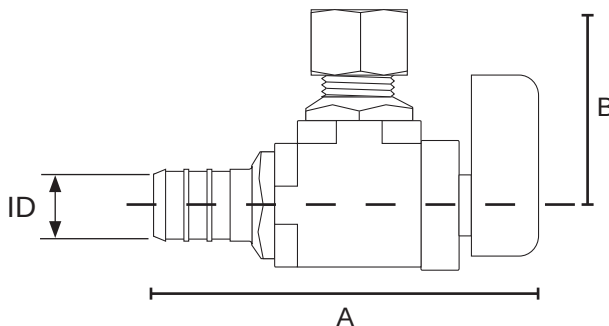

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

This page is intentionally blank.