

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

No lead brass straight ball valve.

Technical Data

Material:..... No Lead (Eco) Brass - C69300
Working Pressure:..... 100 psi maximum
Tested Pressure:..... 100 psi
Maximum Temperature:..... 82°C / 180°F

Listings


IAPMO UPC
CSA

Standards

ANSI/NSF 61
ANSI/NSF 372
ASME A112.18.1/CSA B125.1
ASTM F1807
ASTM F877

Qty	Stk. #	Size	Dimension		ID	Approx. Cv	Weight
			A	B			
	23705NL	½" PEX × ½" PEX	2.8" (71.1mm)	1.2" (30.5mm)	0.35" (8.9 mm)	3.0	3.95 oz (112.0 g)
	23722NL	¾" PEX × ¾" PEX	2.9" (73.6mm)	1.3" (33.0mm)	0.53" (13.5 mm)	6.0	6.63 oz (188.0 g)

Dimensional Diagram

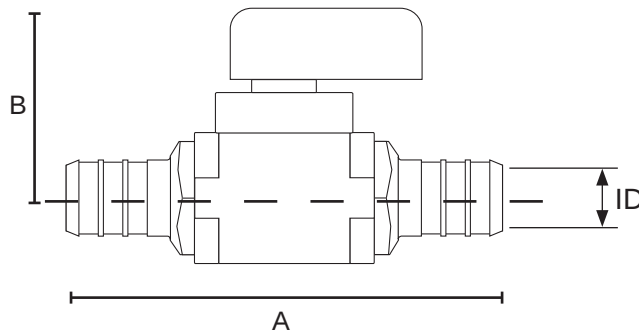

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

This page is intentionally blank.