

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead brass adapter for connecting faucets.

Technical Data


Material:..... No Lead (Eco) Brass - C69300
 Working Pressure:..... 100 psi maximum
 Tested Pressure:..... 100 psi
 Maximum Temperature:..... 180°F / 82°C

Standards / Listings

ANSI/NSF-14
 ANSI/NSF-61 Annex G
 ASTM F1807
 ASTM F877

Qty	Stk. #	Size	Dimension			ID	Weight
			A	B	C		
	25751NL	½" PEX × ⅝" O.D.	1.17" (29.8 mm)	0.63" (15.9 mm)	0.70" (17.7 mm)	0.35" (8.9 mm)	0.59 oz (17.0 g)

Dimensional Diagram

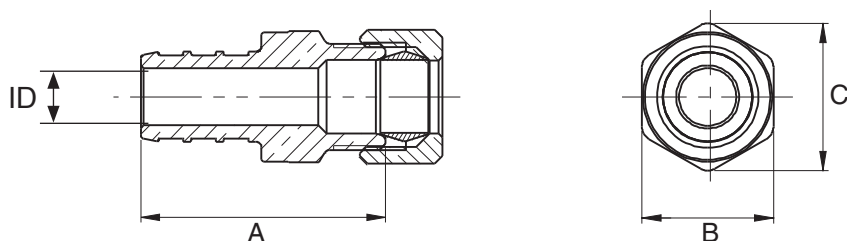

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

This page is intentionally blank.