

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead brass PEX insert × sweat adapters.

Listings

cNSFus-pw

Standards

ASTM F877
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372


Technical Data

Material:..... No Lead (Eco) Brass - C69300
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Codes

IAPMO UPC

Dimension Diagram

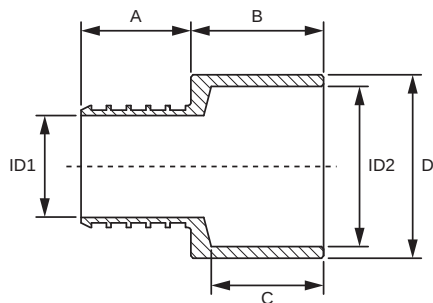

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

Qty	Stk. #	Size	Dimension, in / (mm)						Weight, lb / (kg)
			A	B	C	D	ID1	ID2	
	27105NL	½" PEX × ½" M/Sweat	0.63 (16.0)	0.63 (16.0)	0.49 (12.5)	0.63 (15.9)	0.35 (8.9)	0.50 (12.8)	0.035 (0.016)
	27205NL	½" PEX × ½" F/Sweat	0.63 (16.0)	0.63 (16.0)	0.50 (12.7)	0.75 (19.0)	0.35 (8.9)	0.63 (15.9)	0.042 (0.019)
	27122NL	¾" PEX × ¾" M/Sweat	0.63 (16.0)	0.89 (22.5)	0.75 (19.0)	0.88 (22.3)	0.53 (13.5)	0.77 (19.6)	0.066 (0.030)
	27222NL	¾" PEX × ¾" F/Sweat	0.63 (16.0)	0.91 (23.0)	0.76 (19.2)	1.02 (26.0)	0.53 (13.5)	0.88 (22.3)	0.093 (0.042)
	27328NL	¾" PEX × 1" F/Sweat	0.63 (16.0)	1.02 (26.0)	0.91 (23.2)	1.30 (33.0)	0.53 (13.5)	1.13 (28.7)	0.146 (0.066)
	27128NL	1" PEX × 1" M/Sweat	0.81 (20.5)	1.08 (27.5)	0.94 (24.0)	1.13 (28.6)	0.71 (18.0)	0.97 (24.6)	0.128 (0.058)
	27228NL	1" PEX × 1" F/Sweat	0.81 (20.5)	1.06 (27.0)	0.91 (23.2)	1.30 (33.0)	0.71 (18.0)	1.13 (28.7)	0.157 (0.071)
	27135NL	1 ¼" PEX × 1 ¼" M/Sweat	0.94 (24.0)	1.14 (29.0)	0.98 (25.0)	1.38 (35.0)	0.87 (22.1)	1.18 (30.0)	0.203 (0.092)
	27235NL	1 ¼" PEX × 1 ¼" F/Sweat	0.94 (24.0)	1.14 (29.0)	0.97 (24.7)	1.54 (39.0)	0.87 (22.1)	1.38 (35.0)	0.207 (0.094)
	27141NL	1 ½" PEX × 1 ½" M/Sweat	1.15 (29.2)	1.13 (28.8)	0.98 (25.0)	1.63 (41.3)	1.04 (26.5)	1.46 (37.0)	0.327 (0.148)
	27154NL	2" PEX × 2" M/Sweat	1.50 (38.1)	1.52 (38.5)	1.34 (34.0)	2.13 (54.0)	1.37 (34.7)	1.93 (49.0)	0.525 (0.238)

This page is intentionally blank.