

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead brass PEX insert × PEX insert elbows.

Technical Data

Material:..... No Lead (Eco) Brass - C69300
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Listings

cNSFus-pw


Codes

IAPMO UPC

Standards

ASTM F877
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Dimension Diagram

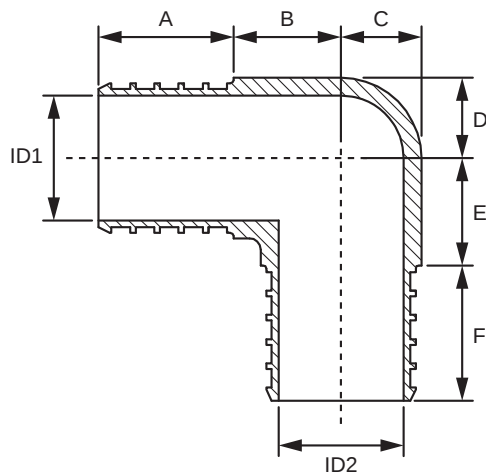

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

Qty	Stk. #	Size	Dimension, in / (mm)						ID1	ID2	Weight, lb / (kg)
			A	B	C	D	E	F			
	28005NL	½" × ½" PEX	0.63 (16.0)	0.33 (8.5)	0.28 (7.0)	0.28 (7.0)	0.33 (8.5)	0.63 (16.0)	0.35 (8.9)	0.35 (8.9)	0.042 (0.019)
	28225NL	¾" × ½" PEX	0.63 (16.0)	0.43 (11.0)	0.37 (9.5)	0.37 (9.5)	0.43 (11.0)	0.63 (16.0)	0.53 (13.5)	0.35 (8.9)	0.086 (0.039)
	28022NL	¾" × ¾" PEX	0.63 (16.0)	0.43 (11.0)	0.37 (9.5)	0.37 (9.5)	0.43 (11.0)	0.63 (16.0)	0.53 (13.5)	0.53 (13.5)	0.075 (0.034)
	28028NL	1" × 1" PEX	0.81 (20.5)	0.53 (13.5)	0.47 (12.0)	0.47 (12.0)	0.53 (13.5)	0.81 (20.5)	0.71 (18.0)	0.71 (18.0)	0.136 (0.062)
	28035NL	1 ¼" × 1 ¼" PEX	0.94 (24.0)	0.75 (19.1)	0.56 (14.3)	0.56 (14.3)	0.75 (19.1)	0.94 (24.0)	0.87 (22.1)	0.87 (22.1)	0.276 (0.125)
	28041NL	1 ½" × 1 ½" PEX	1.15 (29.2)	0.88 (22.3)	0.65 (16.5)	0.65 (16.5)	0.88 (22.3)	1.15 (29.2)	1.04 (26.5)	1.04 (26.5)	0.425 (0.193)
	28054NL	2" × 2" PEX	1.50 (38.1)	1.10 (28.0)	0.85 (21.5)	0.85 (21.5)	1.10 (28.0)	1.50 (38.1)	1.37 (34.7)	1.37 (34.7)	0.796 (0.361)

This page is intentionally blank.