

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Copper stub-out elbow allows for 90° transitions between fixtures and wall cavities.

Technical Data

Material:..... Type L copper

Listings

cNSFus-pw

Codes


IAPMO UPC

Standards

ASTM B88
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61

Qty	Stk. #	Connection	Nom. Tube Size	Weight
	28206	½" PEX	½"	0.216 lb (98 g)

Dimensional Diagram

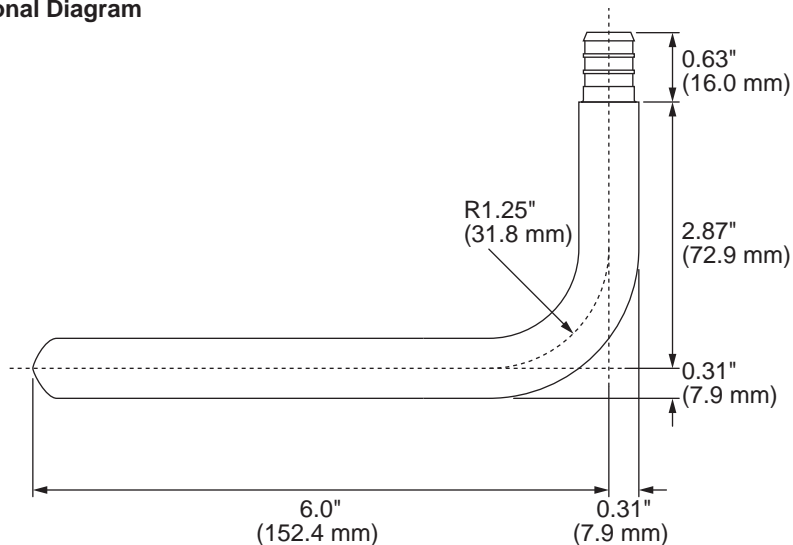

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

This page is intentionally blank.