

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead brass PEX Insert × FNPT drop ear elbow.

Listings

cNSFus-pw

Standards

ASTM F877
ASTM F1807
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Technical Data


Material:..... No Lead (Eco) Brass - C69300
Working Pressure:..... 100 psi maximum
Tested Pressure:..... 100 psi
Maximum Temperature:..... 82°C / 180°F

Codes

IAPMO UPC

Qty	Stk. #	Size	A	B	Dimension C	D	E	ID	Weight
	28305NL	½" PEX × ½" FNPT	2.36" (60.0 mm)	1.50" (38.0 mm)	0.59" (15.0 mm)	0.94" (24.0 mm)	1.73" (44.0 mm)	0.35" (8.9 mm)	3.31 oz (94.0 g)

Dimensional Drawing

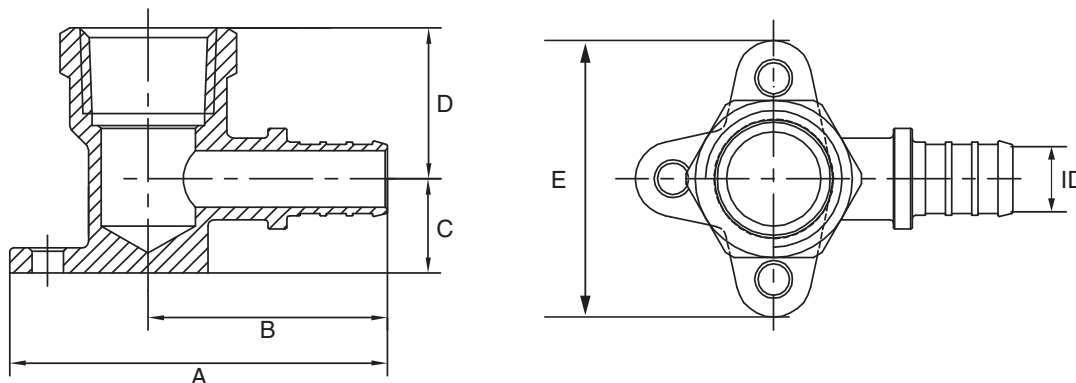

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty

This page is intentionally blank.