

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Thermostatic head for HeatLink[®] zone valves. Liquid-filled thermostat. Temperature range is limited on both ends and can be blocked using covered stops clips. Maximum setting 84°F (29°C). Senses 0.4°F (0.2°C) air temperature change. Takes 24 minutes to close from full open. Valve stroke limiter with setting number 1 to 5. Frost protection.


Technical Data

Max. Sensor Temperature 50°C (122°F)
Hysteresis..... 0.2°C (0.36°F)
Water temperature influence 0.4°C (0.72°F)
Differential pressure influence 0.3°C (0.54°F)

Standards / Listings

n/a

Qty	Stk. #	A	B	Weight
	57091	2" (53 mm)	3-1/2 to 3-5/8" (88 - 93 mm)	0.4 lb 0.16 kg

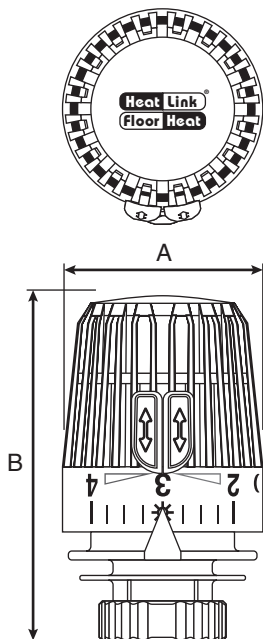

Setting	Room Temperature (°F)	Room Temperature (°C)	Room
2	61°	16°	Rec. room, Bedroom
2-3	64°	18°	Kitchen, Hallway
3	68°	20°	Living room, Dining room, etc.
3-4	71°	22°	Children's room, Family room, etc.
4	75°	24°	Bathroom
5	82°	28°	Pool room

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- L657091 Thermostatic Head Installation Instructions
- Component Warranty