

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Used as injection control for HeatLink[®] zone valves. Senses 0.4°F (0.2°C) supply water change. Takes 15 minutes to close from full open.

Technical Data

Temperature Setting Range:..... 96-150°F (36-66°C)
Sensor: Liquid filled contact sensor

Standards / Listings

n/a


Qty	Stk. #	Dimensions				Weight
		A	B	C	D	
	57094	2" (53 mm)	3-1/2 to 3-5/8" (88 to 93 mm)	6-1/2' (2 m)	6-7/16" (167 mm)	0.65 lb 0.265 kg

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- L657090 Thermostatic Head with Capillary Installation Instructions
- Component Warranty

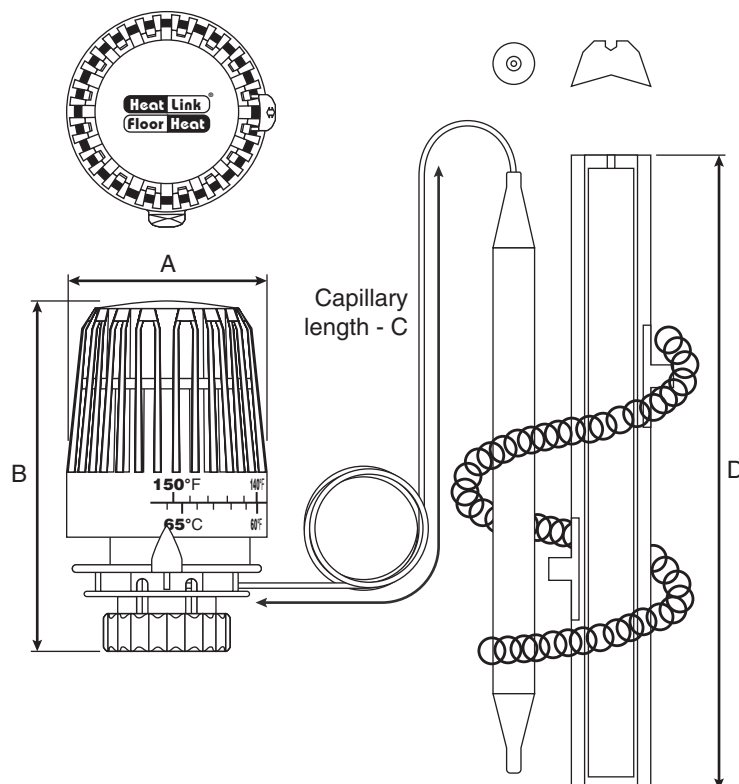

This page is intentionally blank.