

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Mixing Valve Motor controlled by a 3-point signal to operate rotary 3-way (63539, 63541, 63551) or 4-way (64026, 64031, 64041, 64051) FNPT mixing valves. Motor is reversible. The valve can be manually operated by the pull and turn knob on the front of the actuator.

Technical Data

Ambient Temperature: 23 to 131°F (-5 to 55°C)
 Power Supply: 24Vac ± 10%, 50/60 Hz
 Enclosure Rating: NEMA 1, IP41
 Protection Class: II
 Torque: 53.1 lbf.in (6 Nm)
 Power Consumption: 2 VA
 Angle of Movement: 90°
 Running Time 90°: 96 sec
 Control Signal: 3-point SPDT
 Cable Length: 4.9 ft (1.5 m)

The motor should be preceded by a multi-pole contact breaker in the fixed installation.



CE LVD 2006/95/EC
 EMC 2004/108/EC
 RoHS 2002/95/EC


Qty	Stk. #	Weight
	58131	1 lb (0.4kg)

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents

- HeatLink Limited Heating Warranty

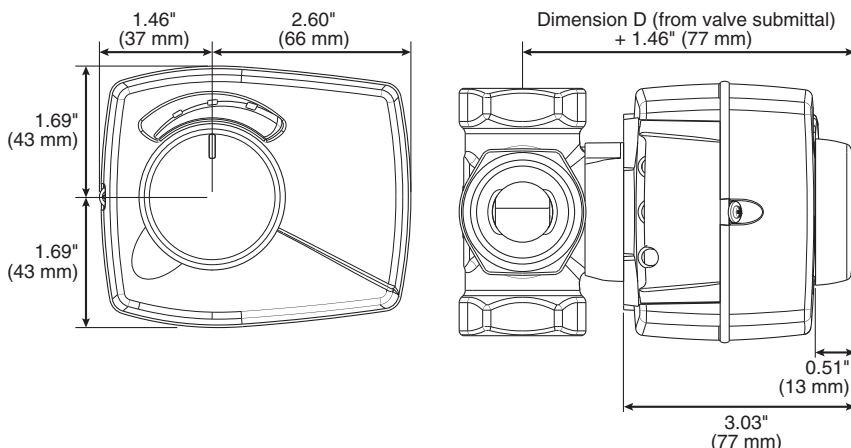

This page is intentionally blank.