

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description


Allows easy access to the manifold through its locking, removable door. Satin coated steel is well suited for painting. Openings for mains piping on left and right sides. Comes with coin/screwdriver locks, key locks are available. Depth allows for mounting a manifold in a 2x4 wall. Space is available for mounting a StatLink® module above the manifold.

Technical Data

Material - Housing and Backplate:..... 16Ga galvanized steel
Material - Cover:..... 16Ga satin coated steel



Options

Key lock (#71901)
that can field replace
the coin/screwdriver
lock of the manifold
housing door.



Qty	Stk. #
	71901


Qty	Stk. #	Dimension							# of locks	Weight
		A	B	C	D	E	F	G		
	71724	24" (610 mm)	23" (584 mm)	3 7/8" (98 mm)	25 1/2" (648 mm)	24 1/2" (622 mm)	5 1/2" (140mm)	9 3/8" (238mm)	2	28.10 lb (12.75 kg)
	71730	30 1/4" (768 mm)	23" (584 mm)	3 7/8" (98 mm)	31 3/4" (806 mm)	24 1/2" (622 mm)	5 1/2" (140mm)	9 3/8" (238mm)	2	34.24 lb (15.53 kg)
	71743	43 1/2" (1105 mm)	23" (584 mm)	3 7/8" (98 mm)	45" (1143 mm)	24 1/2" (622 mm)	5 1/2" (140mm)	9 3/8" (238mm)	3	47.28 lb (21.45 kg)

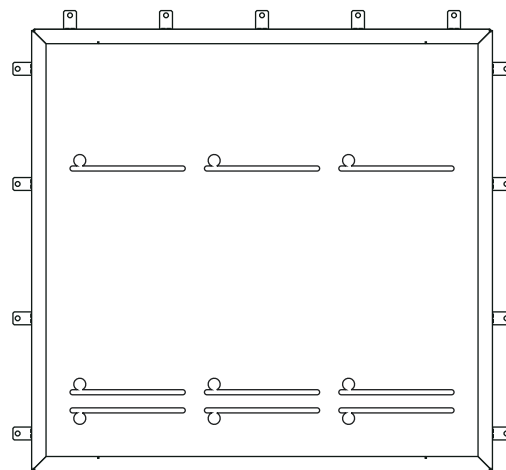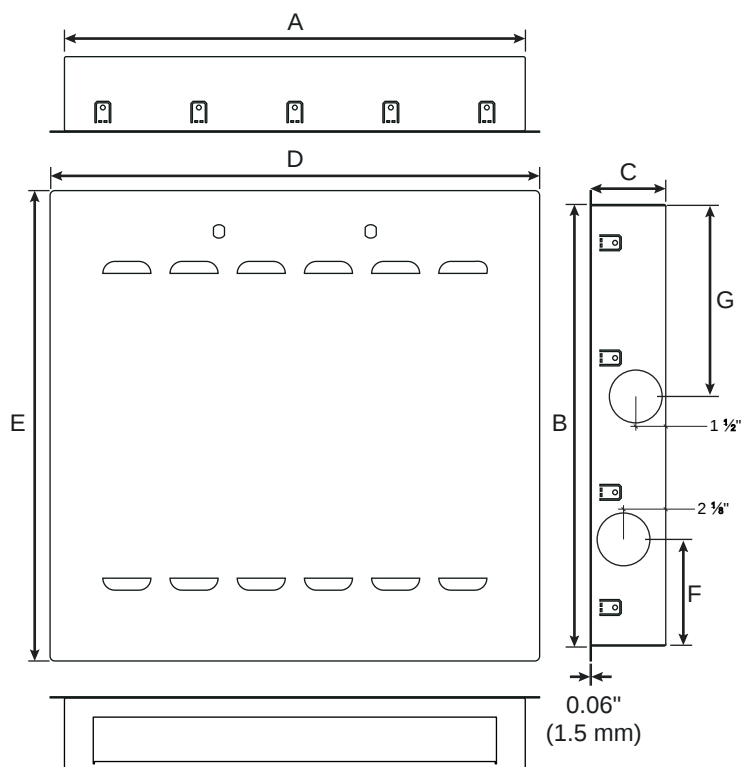

Cover removed and mounting tabs pulled out.

Housing Selection


This table includes an allowance for 90° mains piping ① or straight isolation valves ②.

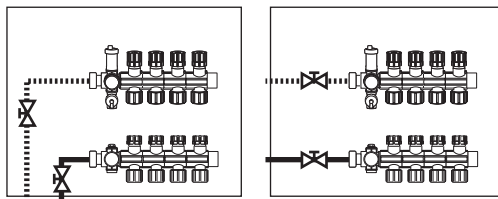

# of loops	TwistSeal® Manifold Assembly Kit #:			1-¼" SS Manifold
	79400	79402	79200	
2	71724	71724	71724	71724
3	71724	71724	71724	71724
4	71724	71730	71724	71730
5	71730	71730	71730	71730
6	71730	71743	71730	71730
7	71743	71743	71730	71743
8	71743	71743	71743	71743
9	71743	71743	71743	71743
10	71743	71743	71743	71743
11	71743	-	71743	71743
12	-	-	71743	71743

Housing Selection

This table is for manifolds only, no piping allowances ③.



# of loops	TwistSeal® Manifold Assembly Kit #:			1-¼" SS Manifold
	79400	79402	79200	
2	71724	71724	71724	71724
3	71724	71724	71724	71724
4	71724	71724	71724	71724
5	71724	71724	71724	71724
6	71724	71724	71724	71724
7	71724	71730	71724	71724
8	71730	71730	71724	71730
9	71730	71743	71730	71730
10	71743	71743	71730	71730
11	71743	71743	71743	71743
12	71743	71743	71743	71743

Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the installation instructions.

Related Documents

- Recessed Manifold Housing Installation Instructions (L671700)
- HeatLink Limited Heating Warranty