

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Assembly kit includes two closed ends with o-ring, two open end adapters with o-ring, and one packet of o-ring lubricant.

Technical Data

Material:..... Stainless Steel
Material - O-ring:..... EPDM
Max Working Pressure 145 psi (10 bar)
Max. Working Temperature 212°F (100°C)

Qty	Stk. #	Dimension		
		A	B	C
	76840	3/8" (5 mm)	2" MBSP	1-1/2" MNPT
	76850	3/8" (5 mm)	2" MBSP	2" MNPT

Installation


Installation of stainless steel manifolds must follow all of HeatLink's instructions and guidelines.

Maintenance

Maintenance of stainless steel manifolds must follow all of HeatLink's instructions and guidelines.

Related Documents

- Stainless Steel Manifold Assembly Instructions (L676600)
- HeatLink Limited Heating Warranty

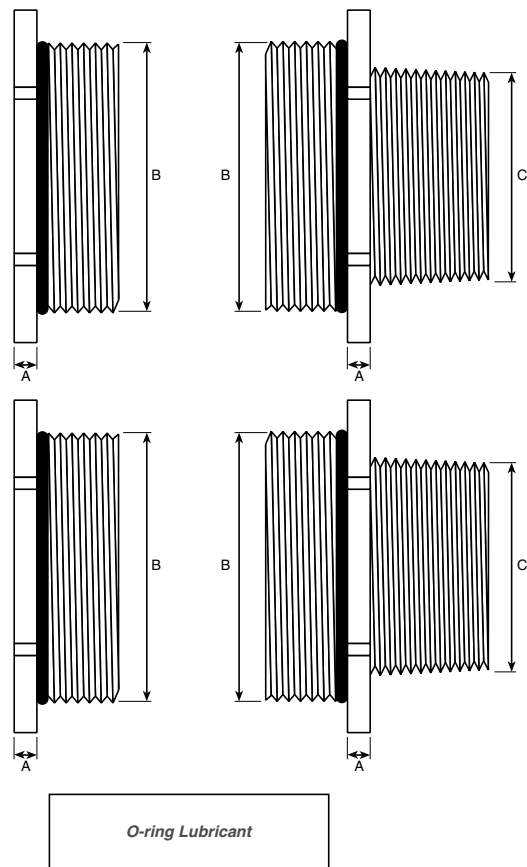

This page is intentionally blank.