

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid brass fitting attaches to the end of the PEX tubing and allows for easy installation onto the bottom of the manifold.

Technical Data

Material - PEX Insert, Split Ring, Nut: Brass
 Material - O-ring:..... EPDM
 Material - PEX (77628):..... PEX-a
 Material - SS Sleeve (77628): Stainless Steel 304
 Material - PEX Coupling (77628):..... No Lead (Eco) Brass - C69300
 Max Working Pressure: 145 psi (10 bar)
 Max. Working Temperature: 212°F (100°C)

Qty	PEX Size	Stk. #	Dimension		Weight
			A	B	
	5/8"	77619	1-1/2" (38 mm)	13/16" (21 mm)	
	3/4"	77622	1-1/2" (38 mm)	13/16" (21 mm)	0.44 lb (0.20 kg)
	1"	77628	1-1/2" (38 mm)	13/16" (21 mm)	

Installation


Installation of stainless steel manifolds must follow all of HeatLink's instructions and guidelines.

Maintenance

Maintenance of stainless steel manifolds must follow all of HeatLink's instructions and guidelines.

Related Documents

- Stainless Steel Manifold Assembly Instructions (L676604)
- HeatLink Limited Heating Warranty

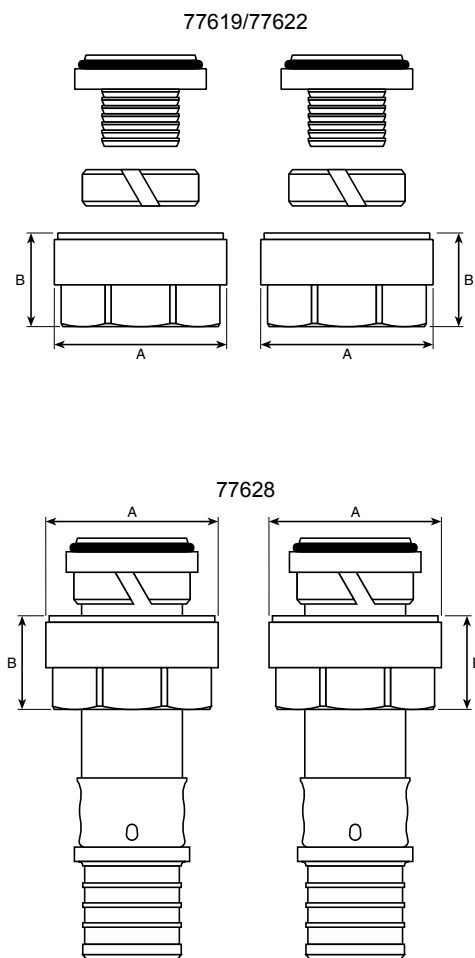

This page is intentionally blank.