

Job or Customer :	
Location :	
Engineer :	
<input type="checkbox"/> Complies with Spec <input type="checkbox"/> Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

Used to fasten piping to wire mesh or rebar. 5-1/2" (140 mm) tie wraps (89105) are used for smaller diameter tubing. 7-1/2" (190 mm) tie wraps (89107) can be used for sizes up to 1".

Technical Data

Material:..... Nylon

Bag Qty	Stk. #	Dimension A	Dimension B	Dimension C	Tie Tensile	Mil-Spec Reference	# per bag	Weight
	89105	5.8" (148.3 mm)	0.140" (3.556 mm)	0.049" (1.244 mm)	40 lb 18 kg	MS3367-5-9	1000	1.5 lb 0.7 kg
	89107	7.5" (192.0 mm)	0.180" (4.572 mm)	0.052" (1.320 mm)	50 lb 22.7 kg	MS3367-1-9	1000	2.8 lb 1.26 kg

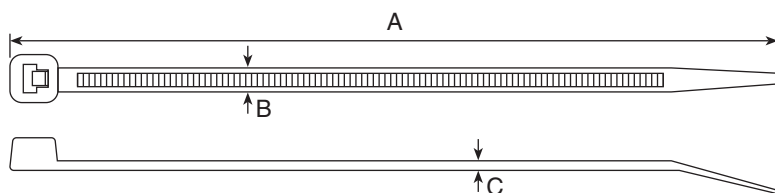


Installation

Installation must follow all of HeatLink's instructions and guidelines, including those in the Installation Guide.

Related Documents

- HeatLink Installation Guide (L3390)
- HeatLink Limited Heating Warranty

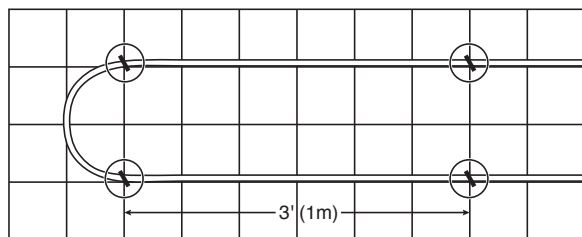

PEX tubing should be secured with tie straps every 3' (1m) on straight runs and at two points on a 180° bend.

This page is intentionally blank.