


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 × swivel adapter for PEX-a potable water expansion systems.

Qty	Stk. #	Size	Dimension, in/(mm)		Weight, lb/(kg)
			A	ID1	
	EX17755	½" PEX × ½" NPSM Swivel	0.707 (18.0)	0.405 (10.3)	0.037 (0.010)

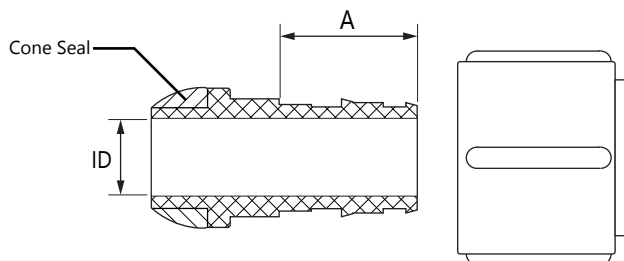

Technical Data

Specifications

Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings

cNSFus-pw-G

Codes

IAPMO UPC

Standards

ASTM F1960	NSF/ANSI 14
ASTM F877	NSF/ANSI 61
CSA B137.5	NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.