


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 elbows for use with PEX-a potable water expansion systems.

Qty	Stk. #	Size	Dimension, in/(mm)								Weight, lb/(kg)
			A	B	C	D	E	F	ID1	ID2	
	EX18005	½" × ½"	0.71 (18.0)	0.52 (13.2)	0.43 (10.9)	0.52 (13.2)	0.43 (10.9)	0.71 (18.0)	0.41 (10.3)	0.41 (10.3)	0.013 (0.006)
	EX18022	¾" × ¾"	0.94 (23.8)	0.68 (17.3)	0.56 (14.1)	0.68 (17.3)	0.56 (14.1)	0.94 (23.8)	0.61 (15.5)	0.61 (15.5)	0.027 (0.012)
	EX18028	1" × 1"	1.18 (29.9)	0.80 (20.4)	0.68 (17.3)	0.80 (20.4)	0.68 (17.3)	1.18 (29.9)	0.81 (21.6)	0.81 (21.6)	0.047 (0.022)

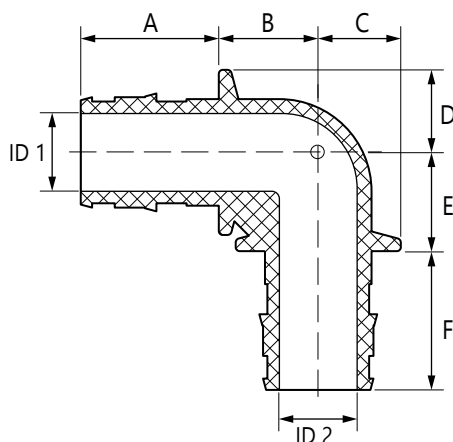

Technical Data

Specifications

Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings

cNSFus-pw-G

Codes

IAPMO UPC

Standards

ASTM F1960	NSF/ANSI 14
ASTM F877	NSF/ANSI 61
CSA B137.5	NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion Systems Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.