


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 couplings for use with PEX-a potable water expansion systems.

PEX F1960 Couplings

Qty	Stk. #	Size	Dimension, in/(mm)						Weight, lb/(kg)
			A	B	C	D	ID 1	ID 2	
	EX19005	½" × ½"	0.71 (18.0)	0.13 (3.3)	0.71 (18.0)	0.84 (21.3)	0.41 (10.3)	0.41 (10.3)	0.010 (0.005)
	EX19022	¾" × ¾"	0.94 (23.8)	0.14 (3.6)	0.94 (23.8)	1.09 (27.7)	0.61 (15.5)	0.61 (15.5)	0.019 (0.009)
	EX19028	1" × 1"	1.18 (29.9)	0.14 (3.6)	1.18 (29.9)	1.33 (33.8)	0.81 (21.6)	0.81 (21.6)	0.036 (0.016)

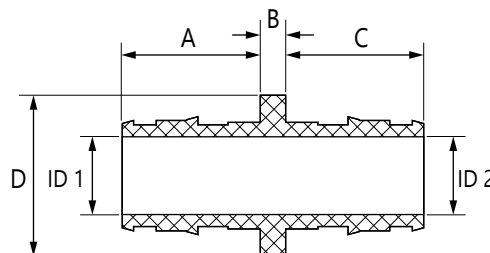

PEX F1960 Reducing Couplings

Qty	Stk. #	Size	Dimension, in/(mm)						Weight, lb/(kg)
			A	B	C	D	ID 1	ID 2	
	EX19225	¾" × ½"	0.94 (23.8)	0.13 (3.3)	0.71 (18.0)	1.09 (27.7)	0.61 (15.5)	0.41 (10.3)	0.017 (0.008)
	EX19282	1" × ¾"	1.18 (29.9)	0.14 (3.6)	0.94 (23.8)	1.33 (33.8)	0.81 (21.6)	0.61 (15.5)	0.030 (0.014)

Technical Data

Specifications	
Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings

cNSFus-pw-G

Codes

IAPMO UPC

Standards

ASTM F1960	NSF/ANSI 14
ASTM F877	NSF/ANSI 61
CSA B137.5	NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.