


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead (Eco) Brass PEX F1960 elbows for PEX-a potable water expansion systems.

Dimension, in/(mm)											
Qty	Stk. #	Size	A	B	C	D	E	F	ID1	ID2	Weight, lb/(kg)
	EX28005NL	1/2" x 1/2"	0.71 (18.0)	0.32 (8.1)	0.31 (7.9)	0.32 (8.0)	0.48 (12.2)	0.71 (18.0)	0.38 (9.7)	0.38 (9.7)	0.112 (0.050)
	EX28022NL	3/4" x 3/4"	0.90 (22.7)	0.40 (10.2)	0.40 (10.2)	0.50 (12.7)	0.50 (12.7)	0.90 (22.7)	0.60 (15.2)	0.60 (15.2)	0.262 (0.119)
	EX28028NL	1" x 1"	1.2 (30.5)	0.60 (15.2)	0.60 (15.2)	0.60 (15.2)	0.80 (20.3)	1.2 (30.5)	0.80 (20.3)	0.80 (20.3)	0.471 (0.214)

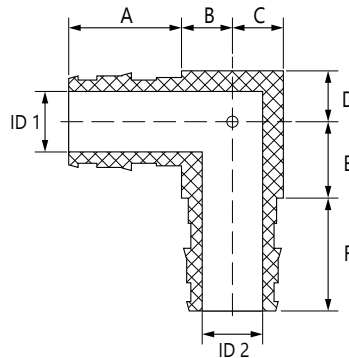

Technical Data

Specifications

Material	No Lead (Eco) Brass - C69300
Operating pressure rating	180°F @ 100 psi (82.2°C @ 0.69 MPa)

Listings

cNSFus-pw-G

Codes

IAPMO UPC

Standards

ASTM F877
ASTM F1960
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- F1960 PEX-a Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.