


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead (Eco) Brass PEX F1960 couplings for PEX-a potable water expansion systems.

Dimension, in/(mm)									
Qty	Stk. #	Size	A	B	C	D	ID1	ID2	Weight, lb/(kg)
	EX29005NL	1/2" x 1/2"	0.71 (18.0)	0.13 (3.3)	0.71 (18.0)	0.75 (19.1)	0.38 (9.7)	0.38 (9.7)	0.064 (0.029)
	EX29022NL	3/4" x 3/4"	0.95 (24.1)	0.13 (3.3)	0.95 (24.1)	1.19 (30.2)	0.60 (15.2)	0.60 (15.2)	0.130 (0.059)
	EX29028NL	1" x 1"	1.18 (29.9)	0.13 (3.3)	1.18 (29.9)	1.35 (34.3)	0.80 (20.3)	0.80 (20.3)	0.230 (0.104)
	EX29225NL	3/4" x 1/2"	0.95 (24.1)	0.13 (3.3)	0.71 (18.0)	1.10 (27.9)	0.60 (15.2)	0.38 (9.7)	0.106 (0.048)
	EX29282NL	1" x 3/4"	1.18 (29.9)	0.13 (3.3)	0.95 (24.1)	1.38 (35.1)	0.80 (20.3)	0.60 (15.2)	0.192 (0.087)

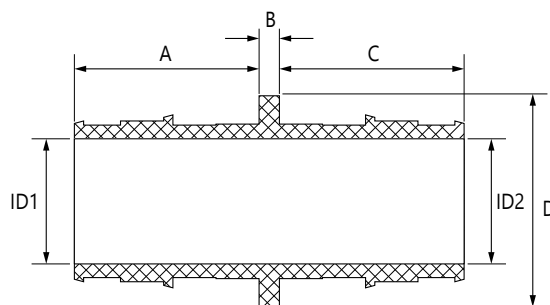

Technical Data

Specifications	
Material	No Lead (Eco) Brass - C69300
Operating pressure rating	180°F @ 100 psi (82.2°C @ 0.69 MPa)

Listings

cNSFus-pw-G

Codes

IAPMO UPC

Standards

ASTM F877
ASTM F1960
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- F1960 PEX-a Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.