





Turn Wrench, counter-clock-wise.

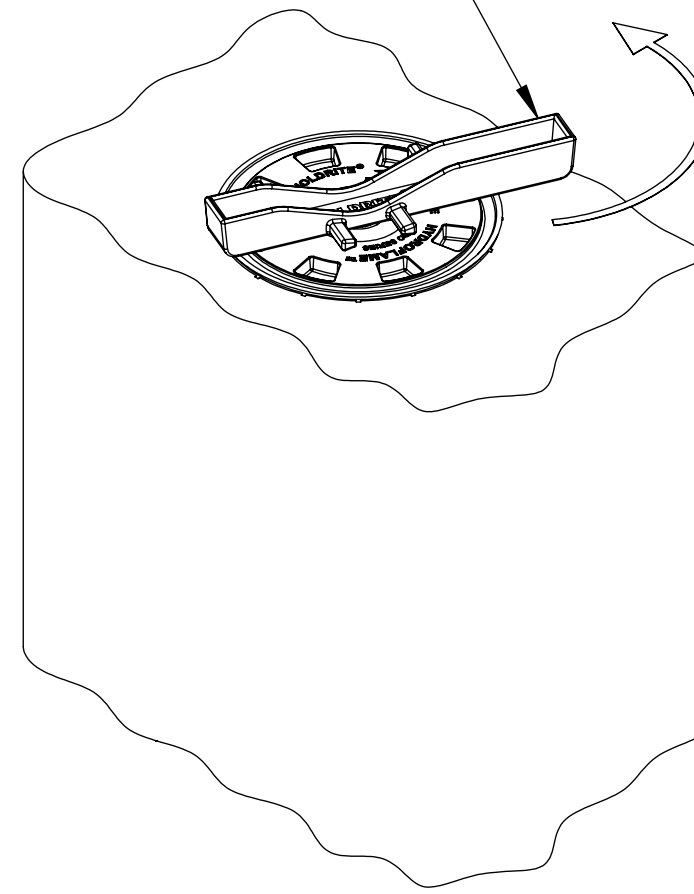

**REMOVE CAP WITH HF WRENCH,
OR BREAK-OUT WITH HAMMER.
(SLEEVE SHOWN POURED IN CONCRETE)
(Fig. 1)**

Plastic Closet Flange

Note: Glue closet flange onto pipe.

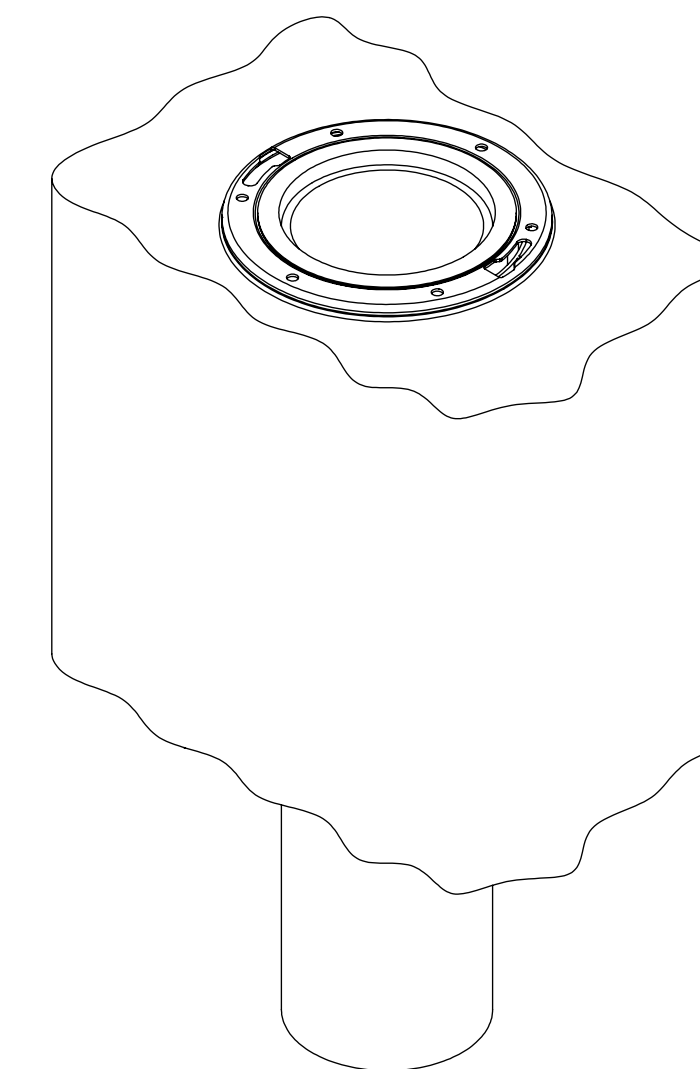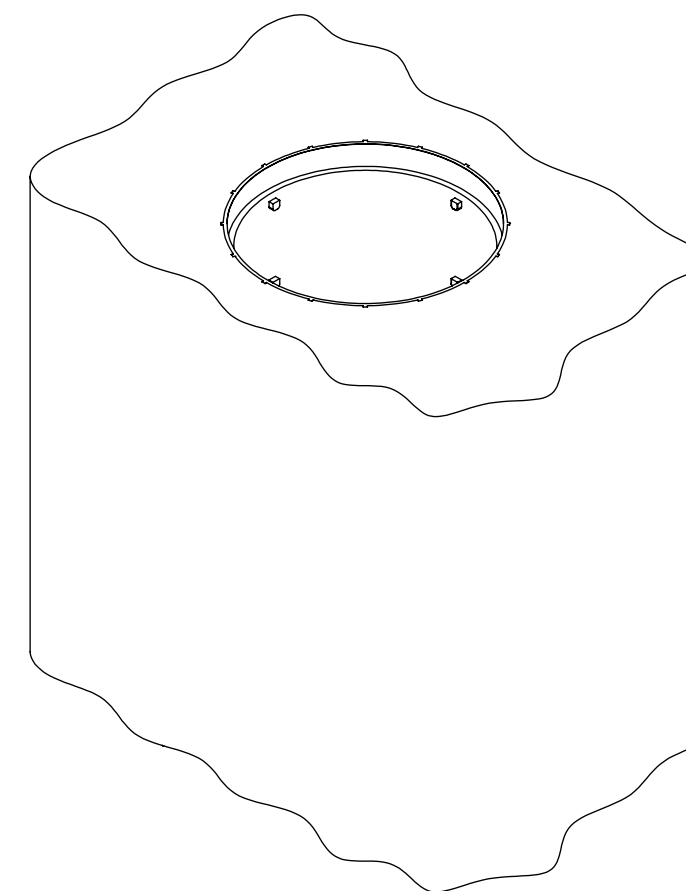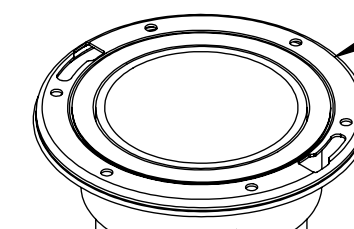

**INSERT PLASTIC CLOSET FLANGE & PIPE.
(Fig. 2)**