


## VR8215 Direct Ignition Gas Valves

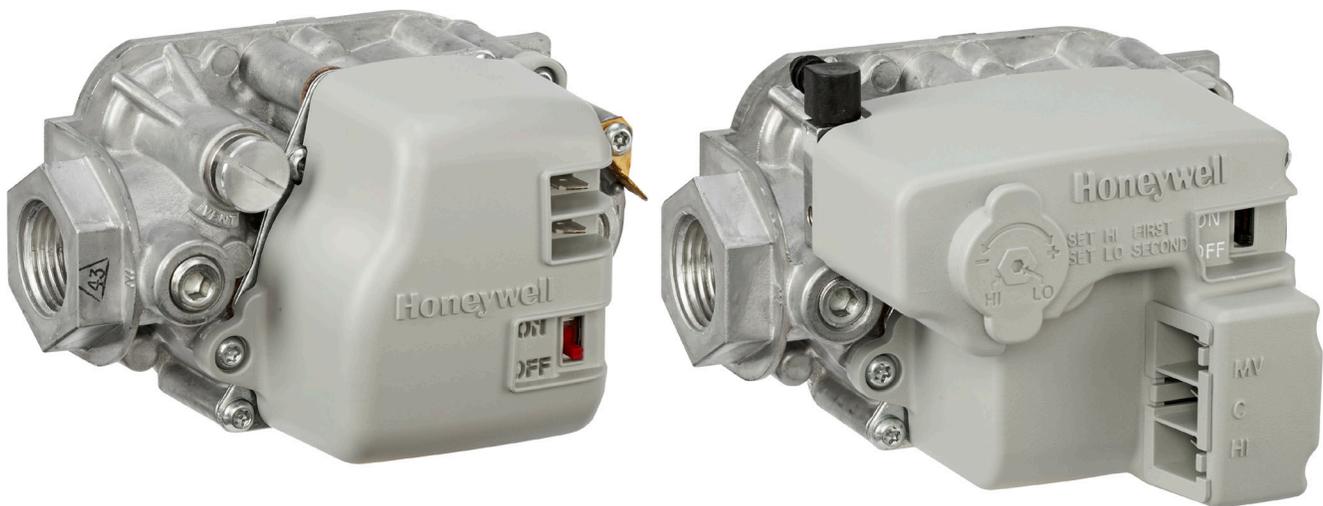

**Your search is over.**

The VR8215 Direct Ignition Gas Valves replace most standard and slow-opening VR8205 and VR8215 controls. The VR8215 valve can be mounted in any orientation and the reduced installation turning radius makes it much easier to install. With the quiet operation, smaller size and ease of installation, the VR8215 gas valves are a great fit for tight and open applications.

The two valves of the Honeywell system function independently, allowing one to act as a failsafe for the other — adding another level of safety. This keeps homes, and their residents, out of harm's way.

# Spend less time searching for the right part.

## VR8215 Direct Ignition Gas Valves Replace Over 90 OEM and White Rodgers Controls



### True Dual Redundant Design

The two valves of the Honeywell system function independently, allowing one to act as a failsafe for the other — adding another level of safety. This keeps homes, and their residents, out of harm's way.

### Compact Design

The VR8215 gas valves have a very compact design with 200K Max BTU output. This gives you more room to work in tight spaces.

### Multipoise Mounting

Multipoise mounting enables you to install the VR8215 at any angle.

### Electrical Connection Flexibility

Compatible with most existing wiring harnesses.

### Single Spring Regulator

Allows for fine adjustment in setting outlet pressure.

	VR8215 GAS VALVE SINGLE STAGE	VR8215 GAS VALVE TWO STAGE
IGNITION TYPE	DIRECT BURNER IGNITION	DIRECT BURNER IGNITION
VALVE STAGES	SINGLE	TWO
VALVE DESIGN	TRUE DUAL REDUNDANT	TRUE DUAL REDUNDANT
VALVE INLET	HEX	HEX
PIPE DIMENSION	1/2 X 1/2 INCH	1/2 X 1/2 INCH
GAS TYPE	NATURAL GAS CONVERTIBLE TO LP	NATURAL GAS CONVERTIBLE TO LP
TURN RADIUS	2.3 INCH	3.0 INCH
VALVE ORIENTATION	MULTIPOISE	MULTIPOISE
ELECTRICAL RATINGS	24V 50/60HZ	24V 50/60HZ
ELECTRICAL CONNECTIONS	SPADE	SPADE AND MOLEX
ON/OFF SWITCH	YES	YES
TEMP RATING	-40F TO 175F	-40F TO 175F
BTU CAPACITY	150K BTU 1" PD 200K MAX BTU	150K BTU 1" PD 200K MAX BTU
CERTIFICATIONS	CSA ANSI Z21-78	CSA ANSI Z21-78

#### SINGLE STAGE

VR8215S1503	STANDARD OPEN
VR8215T1502	SLOW OPEN

#### DUAL STAGE

VR8215Q1669	STANDARD OPEN - SPADE CONNECTION
VR8215Q1651	STANDARD OPEN - MOLEX CONNECTION

Learn More

Visit [forwardthinking.honeywell.com](http://forwardthinking.honeywell.com)

#### Home and Building Technologies

1985 Douglas Drive North  
Golden Valley, MN 55422  
1.800.328.5111  
[www.honeywell.com](http://www.honeywell.com)

04-00010 RL 09/25/17  
© 2017 Honeywell International Inc.

**Honeywell**