

# DEWALT®

# FLEXVOLT®

**60V<sup>MAX\*</sup>**  
LITHIUM ION

**PERFORM  
PROTECT**

## CLAMP SUPPORT ARM LOOP

Helps to reduce  
weight of tool on user

## LOW BATTERY INDICATOR

LED light to alert user when  
battery charge is low

**E-CLUTCH**

Senses the motion of  
the tool and shuts the  
tool down if necessary



**1/2"-2" PIPE CAPACITY**  
Compatible with Ridgid®  
12R+ Style Die Heads



## DEWALT® TOOL CONNECT™ TAG READY

On purpose Tag mounting location used for  
Bluetooth tracking via DEWALT® Tool Connect™.  
(Tag sold separately)

## RUNTIME

**HIGH-PERFORMANCE  
BRUSHLESS  
MOTOR**

Up to 24 cuts per charge  
on 2 inch schedule  
40 black iron pipe†

## COVERED BATTERY COMPARTMENT

Helps to protect batteries from corrosive cutting  
oils and rugged environment



**GLASS-FILLED NYLON BATTERY**  
Helps to protect batteries from corrosive  
cutting oils (2 qty Included)

†with the DCB609 9.0Ah battery under NPT standard.

\*Maximum initial battery voltage (measured without a workload) is 20, 60 and 120 volts. Nominal voltage is 18, 54 and 108.

120V MAX\* is based on using 2 DeWALT 60V MAX\* lithium-ion batteries combined.

\*\*Using DCB609 DeWALT FLEXVOLT® Battery.

†RIDGID is a registered trademark of RIDGID, Inc., which has not manufactured, approved, or endorsed this product.

# FLEXVOLT® 60V MAX\* CORDLESS PIPE THREADER

## DCE700

1



2



3



4



## Attaching Clamp to Pipe

1. Set the depth gauge on the clamp for the appropriate pipe diameter following the size indicator.

Place the clamp over the pipe so that the end of the pipe aligns with the end of the support arm.

Put pressure on the clamp to properly secure it to the pipe. If not secure, make any needed adjustments to the clamp adjustment and push down on the clamp handle to lock the pipe into position.

2. With the clamp attached to the pipe, insert the support arm through the loop on the pipe threader and the pipe into the die.

## Use Die Arm to Start Thread


3. Lower the die arm into position over the die head so that the die plate contacts the die head.

While applying mild pressure to the die arm onto the pipe, pull the trigger switch on the main handle to begin threading.

## Thread Pipe

4. Once the threading has started, the die arm can be raised into the position seen in Fig. 4 and will be held in place by a clip.

## PIPE THREADING DIE HEADS

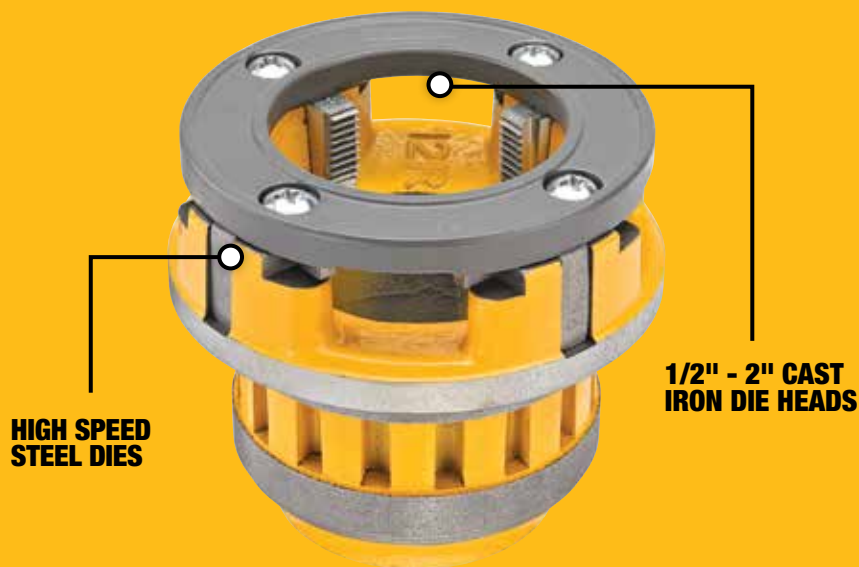

HIGH SPEED  
STEEL DIES

1/2" - 2" CAST  
IRON DIE HEADS



### AVAILABLE

DCE700012	1/2" High Speed Steel Die Head
DCE700034	3/4" High Speed Steel Die Head
DCE700100	1" High Speed Steel Die Head
DCE700114	1-1/4" High Speed Steel Die Head
DCE700112	1-1/2" High Speed Steel Die Head
DCE700200	2" High Speed Steel Die Head



## CORDLESS PIPE THREADER CLAMP

### INNOVATIVE CLAMP DESIGN

Patent-Pending pipe clamp with depth gauge for quick set up and Die Arm to avoid contact with die head to begin threading.

#### SUPPORT ARM

Helps to reduce weight of tool on user

#### CLAMP HANDLE RELEASE


Quickly remove clamp from pipe

#### DIE ARM

Avoid direct contact with the die head when beginning the thread

#### DEPTH GAUGE

Quickly set clamp to size of the pipe being used

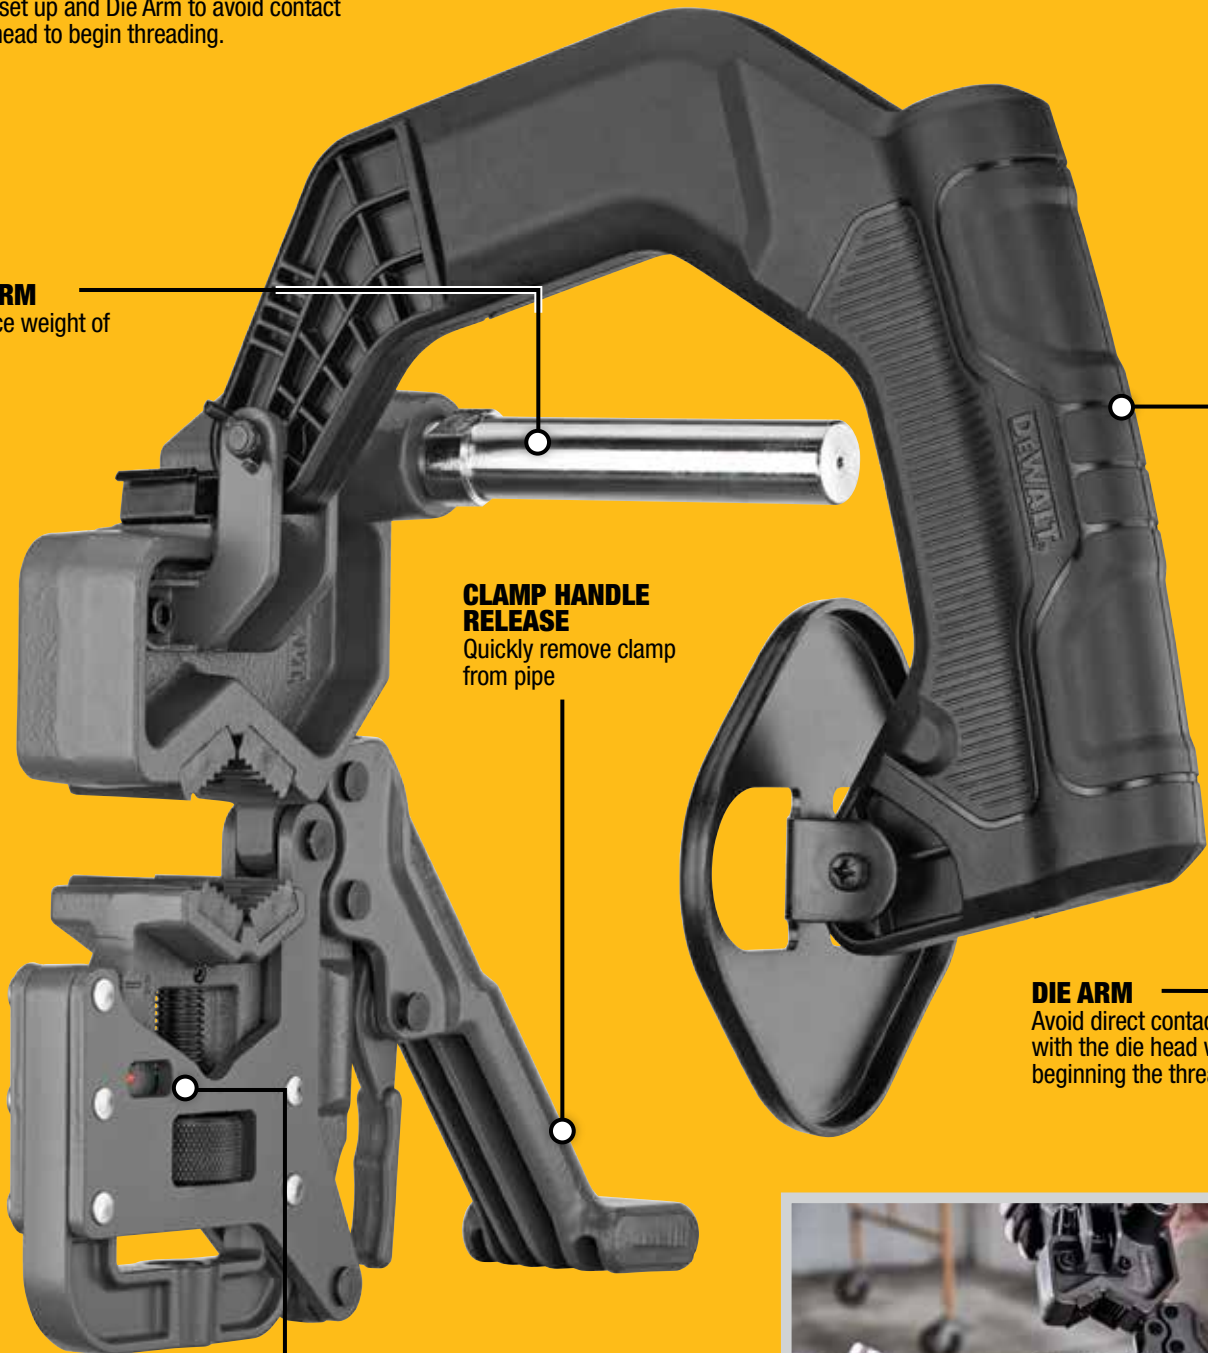



#### SPECIFICATIONS

Capacity	1/2" (12.7 mm) - 2" (50.8 mm) Pipe Capacity
RPM (Forward/Reverse)	30 rpm / 40 rpm
Tool Weight (Tool Only)	19.98 lbs (9.07 kg)
Tool Height	9.4"
Tool Length	26.38"
System	60V MAX*

## RELATED PRODUCTS

**20V MAX\* XR® BRUSHLESS  
1" L-SHAPE SDS PLUS  
ROTARY HAMMER KIT  
WITH ON BOARD DUST  
EXTRACTOR**

DCH273P2H0



**20V MAX\* THREADED  
ROD CUTTER KIT**

DCS350D1



**20V MAX\* XR®  
BRUSHLESS DEEP CUT  
BAND SAW KIT**

DCS374P2




**MINI-UNDERCUT+™  
INTERNALLY THREADED  
UNDERCUT ANCHOR**

PFM2111820




#### COMPATIBLE BATTERY

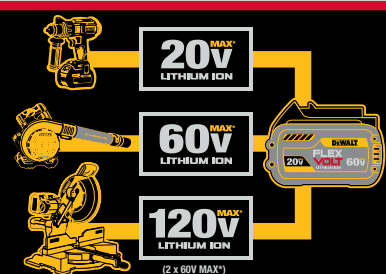

#### FLEXVOLT BATTERY

POWERS 20V MAX\*, 60V MAX\* AND 120V MAX\* TOOLS  
(120V MAX\* = 2 X 60V MAX\*)



#### TOOL WARRANTY

**3**  
YEAR

LIMITED  
WARRANTY

**1**  
YEAR

FREE  
SERVICE

**90**  
DAY

MONEY BACK  
GUARANTEE

#### BATTERY WARRANTY

**3**  
YEAR

LIMITED  
WARRANTY

**3**  
YEAR

FREE  
SERVICE

Warranty does not apply to pipe clamp and die heads

## KIT OPTIONS



**DCE700X2K**

**INCLUDES:** 1) DCE700 FLEXVOLT® 60V MAX\* pipe threader, (1) pipe clamp, (2) FLEXVOLT® 20V/60V MAX\* 9.0 Ah glass-filled nylon batteries, (1) DCB118 20V/60V MAX\* fast charger, (6) die heads, (1) hard carry case, (1) soft bag



**DCE700X2**

**INCLUDES:** 1) DCE700 FLEXVOLT® 60V MAX\* pipe threader, (1) pipe clamp, (2) FLEXVOLT® 20V/60V MAX\* 9.0 Ah glass-filled nylon batteries, (1) DCB118 20V/60V MAX\* fast charger, (1) hard carry case, (1) soft bag

**1-800-4-DeWALT**

**www.DeWALT.com**

Copyright ©2019 DeWALT. The following are examples of trademarks for one or more DeWALT power tools and accessories: the yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDCE700X2KSS