



# Standard

## STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

### Product data

| General Information           |                      |
|-------------------------------|----------------------|
| Lamp Type                     | CFQ13W/GX23          |
| Number of Lamps               | 1 piece/unit         |
| Lamp Footage                  | -                    |
| Ballast Type                  | Magnetic Fluorescent |
| Base Model                    | H1B13TPW             |
| Suitable For Outdoor Use      | Yes                  |
| Automatic Restart             | Yes                  |
| Operating and Electrical      |                      |
| Input Voltage                 | 120 V                |
| Input Frequency               | 60 Hz                |
| Total Harmonic Distortion USA | 25 %                 |
| Ignition Method               | Preheat              |
| Crestfactor (Nom)             | 1.5                  |
| Ignition Time (Nom)           | 1 s                  |
| Input Current (Open Circuit)  | 0.22                 |
| Input Current (Starting)      | 0.36                 |
| Ballast Factor (Nom)          | 0.91                 |
| Power Factor (Nom)            | 0.95                 |
| Input Current (Nom)           | 0.14 A               |
| Input Power (Nom)             | 16 W                 |


| Rated Lamp Power                         | 13 W                 |
|--|----------------------|
| Wiring                                   |                      |
| Wire Striplength                         | 0.50/0.375 mm        |
| Lamp Connection                          | Series               |
| Wire Length by Color                     | See data sheet       |
| Wire Gauge (Nom)                         | 18AWG mm             |
| Wire Type                                | Solid                |
| Remote Wiring Configuration Allowed      | Yes                  |
| Tandem Wiring Configuration Allowed      | No                   |
| Through Wiring Configuration Allowed     | No                   |
| Max Ballast-Lamp Distance Remote Wiring  | 30'                  |
| Max Ballast-Lamp Distance Tandem Wiring  | -                    |
| Max Ballast-Lamp Distance Through Wiring | -                    |
| Mechanical and Housing                   |                      |
| Housing Material                         | Metal                |
| Housing                                  | R1                   |
| Housing Dimensions                       | 4.25" x 2.0" x 1.44" |
| Approval and Application                 |                      |
| EMC Immunity Standard                    | FCC Non-Consumer     |

Standard

|                     |  |
|---------------------|--|
| Approval Marks      | CSA certificate UL certificate RoHS Compliant    |
| Hum And Noise Level | A  |
| UL Recognized       | No   |
| Product Data        |  |
| Order product name  | STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V |

|                                 |              |
|---------------------------------|--------------|
| EAN/UPC - Product               | 781087066850 |
| Order code                      | 913710304401 |
| Numerator - Quantity Per Pack   | 1            |
| Numerator - Packs per outer box | 12           |
| Material Nr. (12NC)             | 913710304401 |
| Net Weight (Piece)              | 386.000 g    |

Dimensional drawing

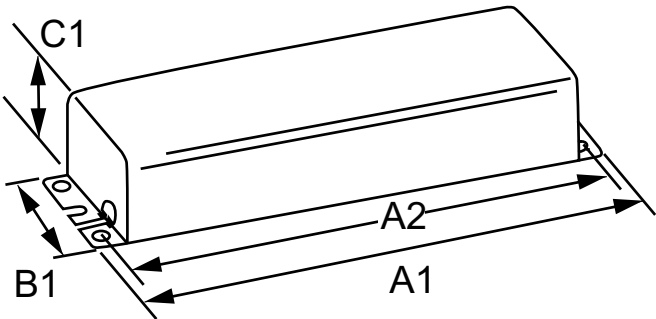

| Product  | A1      | A2      | B1   | C1      |
|--|---------|---------|------|---------|
| STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V | 4.25 in | 3.56 in | 2 in | 1.44 in |

MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

