Technical Information Bulletin

Recessed Fixtures

Date:	
In hands date of project:	
Project name/Number:	
Name of distributor:	
Client #:	
Name of end user:	



ORDERING INFORMATION

Order code: 64362

Description: RF4in/NC/IC/NOBOX/LED/E26/ELUME

UPC: 69549643628


Case quantity: 6

SPECIFICATIONS

Type: New Construction - IC for LED Housing material: Industrial-strength galvanized steel

Can diameter: 4 1/4" (108 mm) Cutting hole diameter: 4 1/2" (114 mm)

Sockets:E26Volts (V):120Thermal protection:YesJunction box:YesWire to wire connectors:YesAirtight:Yes

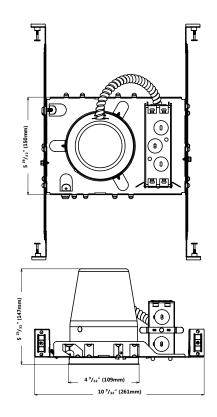















*For complete warranty information please visit www.standardpro.com

Max. of 4 no. 12 AWG through branch circuit conductor suitable for 90°C permitted in box.



Technical Information Bulletin

Recessed Fixtures

ORDERING INFORMATION

Order code: 64362

Description: RF4in/NC/IC/NOBOX/LED/E26/ELUME

UPC: 69549643628

Case quantity:

COMPATIBLE LAMPS AND TRIMS

Compatible lamps	Max Wattage (W)	Compatible STANDARD trims
PAR20	9	64372, 64373, 64374, 64376, 64377, 64378, 64379, 64381, 64383, 64384, 64387, 64389
PAR16 MR16 (E26)	7	64370, 64371, 64375, 64380, 64382, 64385, 64386, 64388

INSTALLATION

- Screw adjusting system
- Permits the installation in ceilings up to 1 1/4 in. in thickness
- Suitable for double drywall application
- Hanger bars included with pre-integrated nails
- Push-in connectors



CAUTIONS

- Turn power off before inspection, installation, or removal
 Risk of electric shock do not use where directly exposed to water or weather
 Risk of fire. Blinking light of this thermally protected fixture may indicate overheating
 Minimum 90 °C supply conductor
 May be interconnected using the same circuit

			ILCICOII		
•	Usé	with	ELUME	trims	only

Qty	Description	Price	
I accept the specif	ications of the luminaire configuration mentioned abo	ove.	
Name:			
Company:			
Signature:		Date:	