



Metal Clad Cable Termination Fittings & Accessories

T&B Catalog Number:

UPC Number:

Status:

Description:

STEX200

78621099682

Active

Star Teck Extreme hazardous location aluminum jacketed cable fitting hub size 2 inches.

Features

Patented powergrip grounding ring.

Removable armor-stop for greater cable ranges.

Patented elastomeric collar ring/bushing for greater cable ranges.

Built-in jacket stripping gauge on gland nut.

Gland nut can be tightened with hammer and screwdriver.

Application

Provides means for passing armored, metal clad, jacketed cable through a bulkhead or enclosure in hazardous areas. (these fittings are suitable for hazardous areas when used with T&B sealing compound).

Form a mechanical grip and water and/or oil-resistant termination.

Provide grounding continuity of cable armor.

General


Material	Aluminum
Strip Length (inches)	1 3/4
Sealing Compound Required-Putty (grams)	12
Sealing Compound Required-Liquid (cc)	66

Dimension Information

Hub Size (inches)	2
Dimension B (inches)	5.120
Dimension C (inches)	3.620
A1:Throat Diameter Minimum (w/Armor Stop)	1.250
A2:Throat Diameter Minimum (wo/Armor Stop)	1.560
Range Over Jacket -Minimum (inches)	1.440
Range Over Jacket -Maximum (inches)	1.965
Range Over Armor -Minimum (inches)	1.280
Range Over Armor -Maximum (inches)	1.805
Strip Length (inches)	1 3/4

Packaging

Package in Units	1
T&B Sold in UOM	Each
T&B Weight Per UOM	2 lbs. Each

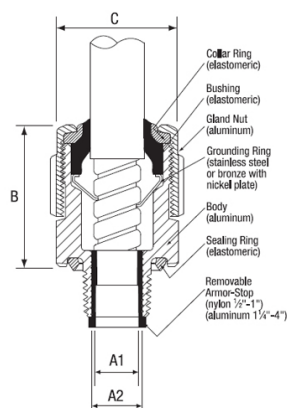

Application Support

Product Specifications & Overview Available on Website

Notes

*Note UL Listed watertight NEMA Type 6P

Certifications

RoHS Compliance Yes

Certifications



File Nbr:

E 82038

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email:techsupport@tnb.com