



Double Ended Linear

Double Ended Linear 1500T3Q/P/CL 240V 12PK

High-quality white light with superior lumen performance Halogen Double Ended lamps provide bright, white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs. High lumen output provides light where you need it.


Product data

General Information	
Base	R7S [R7s]
Operating Position	Horizontal +/- 4 D [Horizontal +/- 4 D]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X
Light Technical	
Initial lumen (Nom)	33000 lm
Luminous Flux (Rated) (Nom)	33000 lm
Correlated Color Temperature (Nom)	2900 K
Luminous Efficacy (rated) (Nom)	22 lm/W
Color Rendering Index (Nom)	100
LLMF at End of Nominal Lifetime (Min)	80 %
Operating and Electrical	
Power (Rated) (Nom)	1500.0 W
Lamp Current (Nom)	6.25 A
Starting Time (Nom)	0.0 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	240 V

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Approval and Application	
Energy Efficiency Label (EEL)	C
Energy Consumption kWh/1000 h	1500 kWh
Luminaire Design Requirements	
Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C
Product Data	
Order product name	Double Ended Linear 1500T3Q/P/CL 240V 12PK
EAN/UPC - Product	046677132262
Order code	132266
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	923932245793
Net Weight (Piece)	0.020 kg
ILCOS Code	HDG//RS-1500-240-R7s-250,7

Double Ended Linear

Dimensional drawing

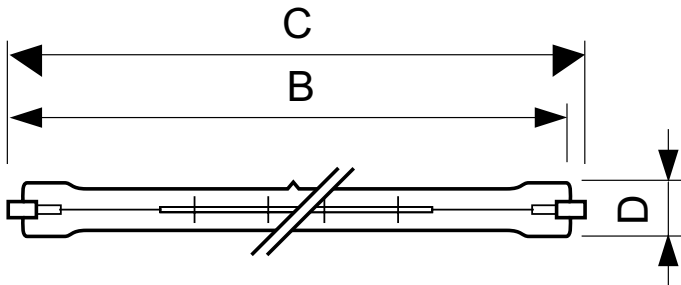

Product	D (max)	B (max)	B	B (min)	C (max)
Double Ended Linear 1500T3Q/P/CL 240V 12PK	11 mm	252.3 mm	250.7 mm	249.1 mm	254.1 mm

DEBig 1500W R7s 240V T11 CL

