

TYPE ND-58

Features


- ① • High strength, butting, forged steel jaw
- ② • Two permanent die grooves
- ③ • Large diameter hardened steel bolts
- ④ • Spring loaded positive lock die retainer buttons
- ⑤ • Orange alignment grooves
- ⑥ • PTFE[®] impregnated steel backed bronze bushings
- ⑦ • Over center cam action
- ⑧ • Adjustment screws
- ⑨ • Handle butt stops and heat shrink tubing
- ⑩ • High quality clear hickory handles
- ⑪ • Bent handles and anti-slip handle grips

Benefits

- Assures proper crimps
- No additional dies required for "0" and "D₃" size tap connectors. The "D₃" groove accommodates the complete line of type "W-" die inserts.
- Provides increased strength and greater bearing area
- Allows fast, easy, one-hand die insertion. No lost dies.
- Allows easy visual field check for proper tool adjustment
- Over 90,000 crimps provided with Teflon impregnated steel backed bronze bushings
- Assures full crimp force
- Easy tool adjustment with allen wrench screws
- Operator protection provided with butt stops and heat shrink tubing
- Long life expectancy provided with select clear hickory handles and light weight high strength aluminum alloy castings
- Easier tool operation is provided with bent handles and anti-slip grips

Specifications

Crimp Force: 9,000 lbs.
Length: 25-3/8"
Weight: 9 lbs.

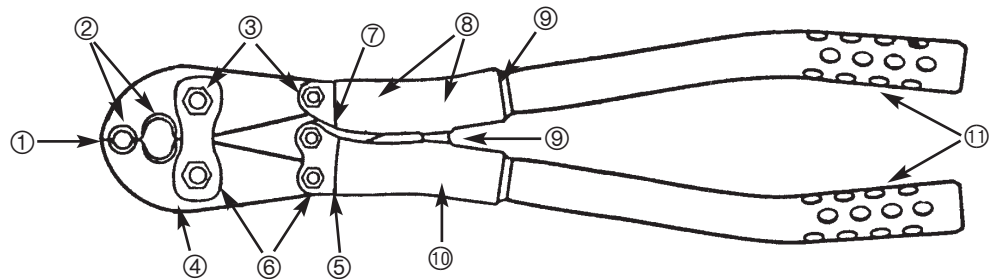

For Use with

Aluminum Connectors

PICS Series
P840 Series
UCL 1/0-4
UCS 1/0-4
HT Series
AH 1-4

Copper Connectors

GGA-1
GGC-1
ULT 4-7