


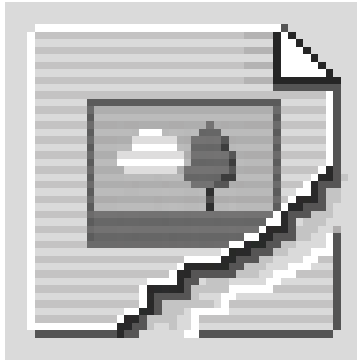

SKU: 25003

UPC: 0783669421118

Features & Benefits:

Description: Heat Shrinkable Tubing, Thin Wall, 3/32in Expanded ID, Conductor Range 22-28, 8ft Disk, Black

Specs

Additional Class Attributes

Container	Disk dispenser
Model	Tube
Shrink Ratio	2:1

Dimensions

Cut Length	96 in
Expanded ID (IN)	0.093
Expanded ID (mm)	2.3622
Length (IN)	96
Length (mm)	2438.4
Recovered ID (IN)	0.046 IN
Recovered Wall Thickness (IN)	0.020 IN

Additional Technical Specifications

Dielectric Strength	600 V/Mil
---------------------	-----------

Material and Finish

Material	Polyolefin
----------	------------

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 10
NEMA Code	0-000-1
UPC Code	78366942111

Testing Standards

CSA File Number	AP-100973-1
CSA Standard	C22.2 No. 198.1
Mil Spec #	AMS-DTL-23053/5 CLASS 1
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation



RUS Listed

Yes

UL / CULUS Specification

UL 224 Recognized

UL File Number

E158587

Environment and Temperature

Flammability Rating

NA

Minimum Shrink Temperature

90°C

Operating Temperature

-55°C to 135°C

Temperature Rating

-55°C to 135°C

Color

Color

Black

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)

22 Sol - 28 Sol

Conductor Range AL Stranded (Primary, run, main, line)

22 Str - 28 Str

Conductor Range AL Stranded (Secondary, tap, load)

22 Str - 28 Str

Conductor Range CU Solid (Primary, run, main, line)

22 Sol - 28 Sol

Conductor Range CU Solid (Secondary, tap, load)

22 Sol - 28 Sol

Conductor Range CU Stranded (Primary, run, main, line)

22 Str - 28 Str

Conductor Range CU Stranded (Secondary, tap, load)

22 Str - 28 Str

Conductor Range AL Solid (Primary, run, main, line)

22 Sol - 28 Sol

Voltage

Voltage Rating

600 V