


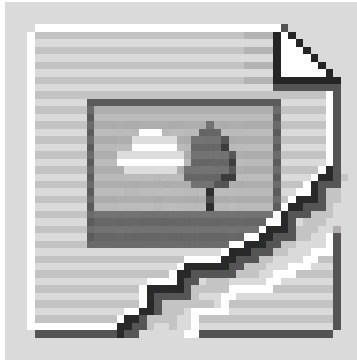

**SKU:** 25005

**UPC:** 0783669421293

**Features & Benefits:**

**Description:**Heat Shrinkable Tubing, Thin Wall, 3/16in Expanded ID, Conductor Range 18-22, 8ft Disk, Black

## Specs

### Additional Class Attributes

|              |                |
|--------------|----------------|
| Container    | Disk dispenser |
| Model        | Tube           |
| Shrink Ratio | 2:1            |

### Dimensions

|                               |          |
|-------------------------------|----------|
| Cut Length                    | 96 in    |
| Expanded ID (IN)              | 0.187    |
| Expanded ID (mm)              | 4.7498   |
| Length (IN)                   | 96       |
| Length (mm)                   | 2438.4   |
| Recovered ID (IN)             | 0.093 IN |
| Recovered Wall Thickness (IN) | 0.020 IN |

### Additional Technical Specifications

|                     |           |
|---------------------|-----------|
| Dielectric Strength | 600 V/Mil |
|---------------------|-----------|

### Material and Finish

|          |            |
|----------|------------|
| Material | Polyolefin |
|----------|------------|

### General

|                             |                 |
|-----------------------------|-----------------|
| Bag Quantity                | 1               |
| Carton Quantity Description | STD PACK QTY 10 |
| NEMA Code                   | 0-000-1         |
| UPC Code                    | 78366942129     |

### Testing Standards

|                   |                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------|
| CSA File Number   | AP-100973-1                                                                                                         |
| CSA Standard      | C22.2 No. 198.1                                                                                                     |
| Mil Spec #        | AMS-DTL-23053/5 CLASS 1                                                                                             |
| Prop65 Compliance | This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation |



RUS Listed

Yes

UL / CULUS Specification

UL 224 Recognized

UL File Number

E158587

## Environment and Temperature

Flammability Rating

NA

Minimum Shrink Temperature

90°C

Operating Temperature

-55°C to 135°C

Temperature Rating

-55°C to 135°C

## Color

Color

Black

## Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)

NA

Conductor Range AL Stranded (Primary, run, main, line)

18 Str - 22 Str

Conductor Range AL Stranded (Secondary, tap, load)

NA

Conductor Range CU Solid (Primary, run, main, line)

18 Sol - 22 Sol

Conductor Range CU Solid (Secondary, tap, load)

NA

Conductor Range CU Stranded (Primary, run, main, line)

18 Str - 22 Str

Conductor Range CU Stranded (Secondary, tap, load)

NA

Conductor Range AL Solid (Primary, run, main, line)

18 Sol - 22 Sol

## Voltage

Voltage Rating

600 V